


FUGRO

Annual Report July 2019 Through June 2020 Calle Del Barco Landslide Assessment District Malibu, California

August 2020
Fugro Project No. 04.62160605
Document No. 04.62160605-PR-004(Rev.00)

City of Malibu

Final

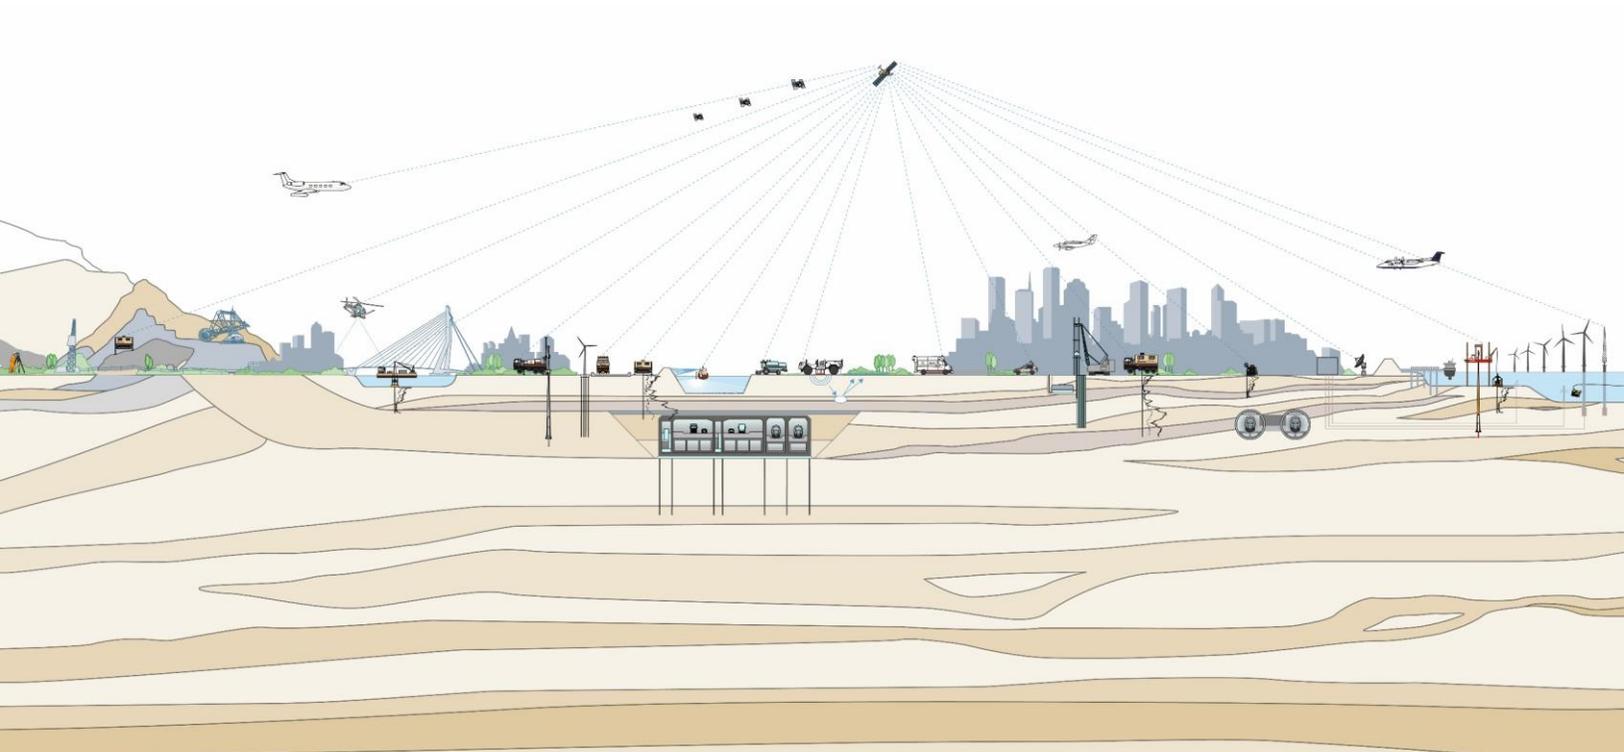



FUGRO

Annual Report July 2019 Through June 2020 Calle Del Barco Landslide Assessment District Malibu, California

August 2020
Fugro Project No. 04.62160605
Document No. 04.62160605-PR-004(Rev.00)

Prepared for: City of Malibu
23825 Stuart Ranch Road
Malibu, California 90265

00	Final	JK	JMM/KMS	KMS	August 21, 2020
A	Draft for Review	JK	JMM/KMS		August 13, 2020
Rev.	Status	Prepared	Reviewed	Approved	Date



FUGRO

4820 McGrath Street, Suite 100
Ventura, California 93003
T +1 805 650 7000
F +1 805 650 7010
www.fugro.com

Fugro Project No. 04.62160605
Document No. 04.62160605-
PR-004(Rev.00) August 21, 2020

City of Malibu
23825 Stuart Ranch Road
Malibu, California 90265

Attention: Mr. Arthur Aladjajian

**Annual Report, July 2019 Through June 2020,
Calle Del Barco Landslide Assessment District,
Malibu, California**

Dear Mr. Aladjajian,

Fugro is pleased to present this annual report for the Calle del Barco Landslide Assessment District. This report summarizes the monitoring and maintenance activities completed during the period of July 2019 through June 2020.

Fugro appreciates the opportunity to be of service to the City of Malibu and the District homeowners. Please contact Jason Moore at (858) 337-8273 if you have any questions regarding this report.

Sincerely,

Fugro USA Land, Inc.

A handwritten signature in black ink, appearing to read "JKim".


Jason Kim, EIT

Staff Engineer/Lead Technician

A handwritten signature in blue ink, appearing to read "JMoore".

Jason Moore, PG, CEG

Associate Geologist/Project Manager

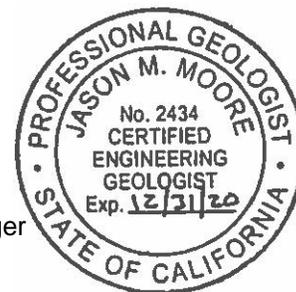

Distribution: (1) Addressee and PDF
(1) City of Malibu - Geotechnical staff and PDF



CONTENTS

1. INTRODUCTION.....1

1.1 Authorization 1

1.2 Background 1

1.3 Scope of Work..... 1

1.4 Report Organization 2

1.5 Report Availability..... 2

2. MONITORING3

2.1 Rainfall Data..... 3

2.2 Groundwater Monitoring..... 3

2.2.1 Standpipe Piezometers..... 3

2.2.2 Pneumatic Piezometers 4

2.2.3 Groundwater Level Discussion 4

2.3 Dewatering Production 6

2.3.1 Total Dewatering Production 6

2.3.2 Dewatering Well Production 6

2.3.3 Hydrauger Production..... 6

2.4 Slope Inclinator Measurements..... 7

3. FACILITY MAINTENANCE8

3.1 Maintenance Summary 8

3.2 Capital Improvement Projects..... 8

4. SUMMARY AND CONCLUSIONS9

5. REFERENCES.....10



TABLES

Table 1. Summary of Average Groundwater Elevations by Area.....6
Table 2. Summary of Facility Maintenance and Assessment8

PLATES

Site Location Map1
Assessment District Map2
Rainfall Graph3
Total Discharge - Wells and Hydraugers4
Groundwater Levels, Dewatering and Rainfall5



APPENDICES

A GROUNDWATER DATA

Piezometer Information Plate A-1
 Summary of Groundwater Data Plate A-2
 Groundwater Hydrograph - Rambla Vista Plate A-3
 Groundwater Hydrograph - Calle del Barco Plate A-4
 Groundwater Hydrograph - Rambla Pacifico Plate A-5

B DEWATERING DATA

Dewatering Well / Hydrauger Information Plate B-1
 Dewatering Well Graph - Rambla Orienta and Slope Plate B-2
 Dewatering Well Graph - Calle del Barco and Rambla Pacifico Plate B-3
 Hydrauger Discharge Rate Graph-Rambla Orienta Plate B-4
 Hydrauger Discharge Rate Graph-Landslide Toe..... Plate B-5

C SLOPE INCLINOMETER DATA

Summary of Slope Inclinerometers Plate C-1
 SI-4 – Cumulative and Incremental Displacement (A Direction).....Plate C-2a
 SI-4 – Cumulative and Incremental Displacement (B Direction).....Plate C-2b
 SI-4 – Displacement vs. Time (A Direction) Plate C-2c
 SI-4 – Displacement vs. Time (B Direction) Plate C-2d
 SI-5 – Cumulative and Incremental Displacement (A Direction).....Plate C-3a
 SI-5 – Cumulative and Incremental Displacement (B Direction).....Plate C-3b
 SI-5 – Displacement vs. Time (A Direction) Plate C-3c
 SI-5 – Displacement vs. Time (B Direction) Plate C-3d
 SI-7 – Cumulative and Incremental Displacement (A Direction).....Plate C-4a
 SI-7 – Cumulative and Incremental Displacement (B Direction).....Plate C-4b
 SI-7 – Displacement vs. Time (A Direction) Plate C-4c
 SI-7 – Displacement vs. Time (B Direction) Plate C-4d
 SI-8 – Cumulative and Incremental Displacement (A Direction).....Plate C-5a
 SI-8 – Cumulative and Incremental Displacement (B Direction).....Plate C-5b
 SI-8 – Displacement vs. Time (A Direction) Plate C-5c
 SI-8 – Displacement vs. Time (B Direction) Plate C-5d
 SI-9 – Cumulative and Incremental Displacement (A Direction).....Plate C-6a
 SI-9 – Cumulative and Incremental Displacement (B Direction).....Plate C-6b
 SI-9 – Displacement vs. Time (A Direction) Plate C-6c
 SI-9 – Displacement vs. Time (B Direction) Plate C-6d
 SI-10 – Cumulative and Incremental Displacement (A Direction).....Plate C-7a
 SI-10 – Cumulative and Incremental Displacement (B Direction).....Plate C-7b
 SI-10 – Displacement vs. Time (A Direction) Plate C-7c
 SI-10 – Displacement vs. Time (B Direction) Plate C-7d
 SI-11 – Cumulative and Incremental Displacement (A Direction).....Plate C-8a



SI-11 – Cumulative and Incremental Displacement (B Direction).....	Plate C-8b
SI-11 – Displacement vs. Time (A Direction)	Plate C-8c
SI-11 – Displacement vs. Time (B Direction)	Plate C-8d
SI-12 – Cumulative and Incremental Displacement (A Direction).....	Plate C-9a
SI-12 – Cumulative and Incremental Displacement (B Direction).....	Plate C-9b
SI-12 – Displacement vs. Time (A Direction)	Plate C-9c
SI-12 – Displacement vs. Time (B Direction)	Plate C-9d
SI-13 – Cumulative and Incremental Displacement (A Direction).....	Plate C-10a
SI-13 – Cumulative and Incremental Displacement (B Direction).....	Plate C-10b
SI-13 – Displacement vs. Time (A Direction)	Plate C-10c
SI-13 – Displacement vs. Time (B Direction)	Plate C-10d
SI-14 – Cumulative and Incremental Displacement (A Direction).....	Plate C-11a
SI-14 – Cumulative and Incremental Displacement (B Direction).....	Plate C-11b
SI-14 – Displacement vs. Time (A Direction)	Plate C-11c
SI-14 – Displacement vs. Time (B Direction)	Plate C-11d
SI-15 – Cumulative and Incremental Displacement (A Direction).....	Plate C-12a
SI-15 – Cumulative and Incremental Displacement (B Direction).....	Plate C-12b
SI-15 – Displacement vs. Time (A Direction)	Plate C-12c
SI-15 – Displacement vs. Time (B Direction)	Plate C-12d
SI-16 – Cumulative and Incremental Displacement (A Direction).....	Plate C-13a
SI-16 – Cumulative and Incremental Displacement (B Direction).....	Plate C-13b
SI-16 – Displacement vs. Time (A Direction)	Plate C-13c
SI-16 – Displacement vs. Time (B Direction)	Plate C-13d



1. INTRODUCTION

1.1 Authorization

Fugro prepared this data report in accordance with our contract with the City of Malibu (City) and consistent with the cost estimate document "Exhibit A - FY 2019-2020 Maintenance Cost Estimate" presented in the Annual Assessment Report (Taussig, 2019).

1.2 Background

The Calle del Barco Landslide Assessment District (Assessment District) was established in 1986 by the County of Los Angeles (County) following the activation of a landslide between Rambla Orienta and Calle del Barco in 1978. The Assessment District provides permanent funding to maintain and monitor dewatering facilities with the purpose of stabilizing the landslide. The County administered the Assessment District until 1991 when the City of Malibu incorporated. The Assessment District was reauthorized in May 1998 under Resolution No. 98-033. The City has since administered the Assessment District, utilizing consultants to maintain and monitor the district facilities.

1.3 Scope of Work

This annual report summarizes the monitoring and maintenance of the geotechnical instrumentation and dewatering facilities for the period between July 1, 2019, and June 30, 2020 (herein after, the 'monitoring period').

Data collected during this monitoring period included the following:

- Annual rainfall data from a local rain gauge operated by the County of Los Angeles, Department of Public Works - Water Resources Division;
- Monthly groundwater level measurements from 9 standpipes;
- Periodic groundwater level measurements from 19 pneumatic piezometers;
- Monthly dewatering production readings from 11 dewatering wells;
- Monthly dewatering production readings from 11 horizontal drains;
- Quarterly to Semi-Annual ground deformation measurements from 12 slope inclinometers; and
- Periodic maintenance of dewatering and monitoring facilities.

Fugro staff checked the operating condition of the instrumentation and dewatering facilities at each field monitoring/observation location and by evaluating preliminary data in the office as information was received. Maintenance was performed as needed, based on field observations, preliminary data evaluation and correspondence from concerned homeowners and tenants.

The scope of our services is limited to monitoring and maintaining the Assessment District facilities. The services that are provided on an annual basis for the Assessment District do not include geologic or engineering evaluations of the stability of the landslide.



1.4 Report Organization

This report summarizes the monitoring data collected during the July 1, 2019 to June 30, 2020, monitoring period and presents conclusions regarding the annual monitoring results. The location of the Assessment District is illustrated on Plate 1 - Site Location Map. Locations of the geotechnical instrumentation facilities are shown on Plate 2 - Assessment District Map. Tabulated and graphic summaries of monitoring data are presented in Appendices A through C as indicated in the table of contents.

1.5 Report Availability

The annual Assessment District reports are available for review at Malibu City Hall. Reports may also be viewed on the City's website at <http://www.malibucity.org>.



2. MONITORING

2.1 Rainfall Data

A graph of historical monthly rainfall and average annual rainfall from October 1968 through June 30, 2020, is shown on Plate 3 - Rainfall Graph. Monthly rainfall totals from 1968 through 2004 were obtained from County of Los Angeles Department of Public Works (LADPW) Carbon Canyon Rain Station 447C and monthly rainfall totals from 2004 to the present were obtained from LADPW Big Rock Mesa Rain Gauge 1239.

Rainfall data indicate that approximately 16.65 inches of precipitation fell during the monitoring period from July 1, 2019, through June 30, 2020. This approximation is derived from rainfall data that is annually monitored between October 1 through September 30. This year's precipitation is approximately 107 percent of the average annual rainfall from 1968 to 2020 in the "Malibu Area" of approximately 15.57 inches.

Plate 5 – Groundwater Levels, Dewatering, and Rainfall shows the yearly magnitude of deviation of each years' rainfall relative to the mean annual rainfall. The graphic also shows the average annual dewatering output in gallons per day (gpd). The data illustrate that the average annual dewatering output is generally consistent with average rainfall.

2.2 Groundwater Monitoring

The groundwater level data collected during the current monitoring period are summarized in Appendix A and a summary graph of annual mean high groundwater elevations for the Assessment District is included as part of Plate 5. Groundwater levels fluctuate throughout the year and from year-to-year in response to natural and man-made influences. The primary natural influence is varying precipitation. Man-made influences include:

- Infiltration from septic systems;
- Infiltration from irrigation;
- Alterations to surface drainage by, for example, grading, landscaping, storm drains and rain gutters;
- Accidental water discharges from leaking utilities such as water, irrigation, sewer, and storm drain lines as well as swimming pools; and
- Dewatering activities from pumping dewatering wells and hydraugers.

Typically, groundwater levels rise relatively quickly following significant rainfall and gradually lower after a wet season ends. Groundwater levels recorded in the Assessment District have typically peaked around late-March to mid-April and gradually decline from late September through November.

2.2.1 Standpipe Piezometers

Nine standpipe piezometers (SI-4, SI-5, SI-7, SI-8, SI-9, SI-13, SI-14, SI-15, and SI-16) were measured over the monitoring period. Standpipe piezometers are constructed from a length of pipe, usually PVC, inserted into a borehole and then backfilled in place with grout, sand or other approved backfill materials. The pipe contains perforations along selected depth intervals that allow groundwater to enter from the



formation and fill the pipe to a height equivalent to the water head at the perforated interval. Some of the standpipes in Calle del Barco may be perforated along most of their length and are therefore effective at measuring the average water head at their location, which is typically the equivalent of the water table. Other standpipes are perforated only at the bottom five feet of the casing and measure water head specific to that depth interval. The water level inside piezometers is measured directly by lowering an electric sounder down the standpipe into contact with the water surface. The locations of the standpipe piezometers are depicted on Plate 2 - Assessment District Map, and groundwater elevation data are presented in Appendix A.

2.2.2 Pneumatic Piezometers

Inclinometer casings installed within the Assessment District after 1996 were outfitted with between two and four pneumatic piezometer sensors, also referred to as 'Tips', nested at varying depths along the length of the inclinometer casing. Each sensor records the saturated pore water pressure at its nested depth by measuring differential air pressure between the instrument sensor and the groundwater surface across a flexible bladder. Differential pressure is converted into water head, which is translated to a relative groundwater elevation. Measuring pore pressures at specific elevations along a vertical profile can be used to measure flow gradients for groundwater migrating through the formation above and within the water table and to infer the presence of perched or confined groundwater zones.

With the exception of SI-16 installed in 2003, the District's pneumatic sensors were installed in 1998 or earlier. Over time, some of the sensors and their air-line tubing have developed leaks or become occluded, resulting in inconsistent results especially when reading low pore pressures. Due to the inconsistent data and generally historical low groundwater levels, the pneumatic piezometers were monitored only intermittently during the 2019 - 2020 monitoring period.

The locations of the piezometers are shown on Plate 2 and groundwater elevation data are presented in Appendix A. The results of the pneumatic piezometer readings are presented along with standpipe measurements in Appendix A.

2.2.3 Groundwater Level Discussion

General. Groundwater data were reviewed by evaluating changes that occurred within each of three geographic areas delineated within the Calle del Barco Landslide limits. Groundwater elevations within each of the three areas were compared to the previous and current monitoring period as well as to levels over extended periods. To analyze trends in seasonal groundwater fluctuations, the average (mean) annual and highest annual recorded groundwater elevation for each piezometer were calculated and compared with those of previous years (Appendix A, Plate A-2).

Rambla Vista. Groundwater elevation data for the Rambla Vista Area are presented in Plate A-3. Groundwater levels for this area are monitored using standpipes SI-4 and SI-7 and the pneumatic piezometers attached to Inclinometer SI-10. In general, groundwater elevations in the Rambla Vista Area increased slightly during the 2019 - 2020 monitoring period. The calculated area average water-level increased by 1.0 foot in comparison to the area average for the 2018 - 2019 monitoring year and is 4.2 feet below the mean area average for this area for the period of record (1991 - 2020).



Similar to patterns seen in previous monitoring years, the groundwater levels measured in standpipe SI-4 increased around the onset of the spring season before lowering in June. The temporary rise in water elevation measured in SI-4 can likely be attributed to the increased rainfall during March and April 2020. In addition, the monitoring period's year-average groundwater elevation of 174.5 feet is 5.6 feet below that of the period of record.

Groundwater elevations in SI-7 remained relatively static, varying by less than 0.5 foot during the 2019-2020 monitoring year.

Pore pressure readings in pneumatic piezometer SI-10 Tip 3 and Tip 4 measured 0 PSI. Pneumatic piezometer SI-10 Tip 3 has read 0 PSI since September 2006 and Tip 4 has read 0 PSI since installation. It is believed that Tip 3 and Tip 4 are functioning but are reading zero due to the groundwater elevation being lower than the piezometer tip elevation. SI-10 Tip 2 is clogged and non-functional and was last readable in January 2010. SI-10 Tip 1 remained relatively consistent with results from previous monitoring periods.

Calle Del Barco. Groundwater data for the Calle del Barco Area is presented on Plate A-4. Groundwater levels for this area are monitored using standpipe piezometers SI-5, SI-8, SI-9, SI-15, and SI-16 and pneumatic piezometers attached to inclinometers SI-9, SI-11, SI-12, SI-15, and SI-16. In general, groundwater elevations in the Calle del Barco Area for the 2019-2020 monitoring period increased approximately 2.7 feet from the 2018-2019 monitoring period. The Calle del Barco area remains approximately 10.1 feet below the mean water level elevation for this area over the period of record.

Water levels in SI-15 and SI-16 remained relatively constant throughout the monitoring year. Water levels in SI-5, SI-8, and SI-9 increased approximately 1.6 feet, 2.6 feet, and 1.5 feet, respectively over the 2019 – 2020 monitoring year.

Rambla Pacifico. Groundwater data for the Rambla Pacifico Area are presented on Plate A-5. Groundwater levels for this area are monitored using standpipe piezometers SI-13 and SI-14 along with two pneumatic piezometers installed within each of those standpipes. In general, groundwater elevations in the Rambla Pacifico Area for the 2019-2020 monitoring period increased slightly. The calculated area average increased by 1.3 feet when compared to the 2018-2019 monitoring period and is 3.2 feet below the mean water level elevation for the area for the period of record.

Water levels in SI-13 and SI-14, increased slightly over the monitoring period. Pneumatic Piezometers SI-13 Tip 1 has read 0 PSI since May 2017. It is believed that Tip 1 is functioning, but is reading zero due to the groundwater elevation being lower than the piezometer tip elevation. The shallow pneumatic piezometer (Tip 2) in SI-14 has been dry since installation and no data are reported.

Dewatering well W-K, located within the Rambla Pacifico Area near SI-13 has a reported bottom elevation of 370 feet and has been dry since December 2015.



Summary. Table 1 presents the average and highest annual groundwater levels by area. The shallow pneumatic piezometers located above the water table reflect unsaturated conditions, which indicates that there has not been sufficient recharge to maintain significant shallow perched water.

Table 1. Summary of Average Groundwater Elevations by Area

Location	Average Groundwater Elevation 2019-2020	Change from Prior Year Average	Peak Groundwater Elevation 2019-2020	Change from Prior Year Peak
Rambla Vista	163.1	+1.0	166.4	+0.6
Calle Del Barco	250.8	+2.7	251.8	+2.5
Rambla Pacifico	347.0	+1.3	347.5	+1.2

Note: All Units are in feet.

2.3 Dewatering Production

Dewatering production data are provided in Appendix B, with dewatering well and hydrauger information presented on Plate B-1. A summary of the dewatering output compared to groundwater levels and rainfall is depicted on Plate 5.

2.3.1 Total Dewatering Production

A combined graph of the total dewatering rate for the monitored dewatering wells and hydraugers is presented on Plate 4. Total dewatering production data for the measured hydraugers and wells indicates the following:

- The average total dewatering rate during the monitoring period was approximately 563 gallons per day (gpd). This represents an approximate 3 percent increase in the average dewatering rate relative to the 544 gpd average recorded during the previous monitoring period.

2.3.2 Dewatering Well Production

Graphs showing production rates for individual dewatering wells are provided in Appendix B. Production data for the dewatering wells indicate the following:

- The average total dewatering well production rate for this monitoring period was approximately 345 gpd. This represents an increase of approximately 3 percent from the average production rate of 335 gpd for the previous monitoring period.
- Dewatering well W-K has remained dry since December 2015.

2.3.3 Hydrauger Production

Graphs of production rates for individual hydraugers are included in Appendix B. Data for the hydraugers indicate the following:



- The average production rate for all hydraugers over the monitoring period is approximately 210 gpd. This is consistent with the average production rate of 209 gpd from the previous monitoring period.

2.4 Slope Inclinometer Measurements

Fugro monitored 10 slope inclinometers on a semi-annual basis and 2 slope inclinometers on a quarterly basis to evaluate changes in subsurface ground deformation. Plots of slope inclinometer measurements (four plots for each monitored slope inclinometer) are presented in Appendix C. The first plot shows the cumulative deflection and incremental deflection for the A-direction and the second plot shows the cumulative deflection and incremental deflection for the B-direction. Those two plots show approximately one measurement per year from about 2006 through the current monitoring year. The third and fourth plots show displacement versus time for the same period for all the measurements plotted on the A and B direction plates the during that period.

When reviewing and interpreting the slope inclinometer data plots, instrument limitations and movement history should be considered. Individual plots have been reviewed and interpreted with regard to movement along identified slide planes. Interpreted movement along the identified slide planes is summarized on Plate C-1 in Appendix C.

Some inclinometers show some inconsistent changes (typically <0.1 to 0.2 inch), but the potential movement magnitude and orientation is not clear and is not within the reliable accuracy of the instrument. Although these potential movements are small with respect to the accuracy of the inclinometer, when consistent over a period of several years they may indicate a cumulative trend. If consistent small movements over several years approach or exceed the threshold of the precision of the device, they may indicate movement that is at or near what can be quantified by the monitoring system.

Inclinometer SI-8 experienced under 0.1 inches of displacement over the monitoring period consisting mainly of minor translational movement from approximately 100 to 122 feet below ground surface. Historically, inclinometer SI-8 has exhibited a pattern of movement measured at the ground surface at a rate of approximately 0.01 inch/year since period of record. Cumulative movement of the inclinometer appears to be translational at about 122 feet bgs.

No other discernible movement was detected in the other inclinometers within the Calle del Barco Assessment District during the 2019-2020 monitoring year.



3. FACILITY MAINTENANCE

3.1 Maintenance Summary

The operating status of each dewatering well and hydrauger was checked monthly. When necessary, repair work was scheduled and undertaken as expeditiously as possible, typically within a matter of a few hours or days. Table 2 - Summary of Facility Maintenance provides a description of maintenance activities that were completed during the current monitoring period.

Table 2. Summary of Facility Maintenance and Assessment

Date	Facility	Description
10/30/19	Wells	Post-blackout event - confirming well operation.
1/16/20	W-B	Well rehabilitation - replacement of pump, motor, pump saver control box, and column pipe, brushing, bailing, and taking iron bacteria mitigation measures.
4/10/20	Wells	Checking well control box conditions.

3.2 Capital Improvement Projects

No capital improvements were performed during the current monitoring period.



4. SUMMARY AND CONCLUSIONS

The status of monitoring facilities within the Calle del Barco Landslide Assessment District can be summarized as follows:

- Measured rainfall during the 2019 - 2020 monitoring year (July 1 through June 30) was 16.65 inches of precipitation. Rainfall during that monitoring period was above the “Malibu Area” historical average of 15.57 inches per monitoring year measured from 1968 through 2020.
- Average groundwater level elevations in Rambla Vista, Calle Del Barco, and Rambla Pacifico areas have increased by 1.0 feet, 2.7 feet, and 1.3 feet, respectively, in comparison to the 2018 – 2019 monitoring period. These elevations are below the mean groundwater level elevations of the period of record by 4.2 feet, 10.1 feet, and 3.2 feet, respectively.
- In the standpipe piezometers, measured groundwater levels were lower than groundwater levels in monitoring year 1997 - 1998 when major slope failure occurred.
- Total dewatering production increased about 3 percent in comparison to last year’s total production.
- Groundwater production from existing dewatering wells and hydraugers should be expected to continually decline, in general, regardless of rainfall amounts, as the efficiency of the wells and hydraugers decreases due to mineralization and aging. This may contribute to reduced rates of groundwater lowering or localized increases in groundwater levels. Periodic maintenance of the existing facilities and replacement of older, worn-out pumps should improve the efficiency of the dewatering systems throughout the year, especially during and immediately following the rainy months.
- Inclinator SI-8 displayed what appeared to be minor translational movement less than 0.1 inch around 122 feet below the ground surface. No other significant discernible movement was detected in any other inclinometers within the Calle del Barco Assessment District during the 2019 - 2020 monitoring year.
- Water conservation is encouraged throughout the Calle Del Barco District to reduce the infiltration of domestic water and the potential for future groundwater level increases. Control of groundwater levels within the landslide area is a critical to maintaining the stability of the landslides.



5. REFERENCES

Bing Yen and Associates, Inc. (2003), 'Annual Observation & Maintenance Report for the Period April 2002 to June 2003, Calle Del Barco, Malibu, California,' dated October 2003.

_____ (2003), 'Annual Observation & Maintenance Report for the Period April 2001 to June 2002, Calle Del Barco, Malibu, California,' dated January.

_____ (2001), 'Annual Observation & Maintenance Report for the Period April 2000 to June 2001, Calle Del Barco, Malibu, California,' dated August.

_____ (2000), 'Annual Observation & Maintenance Report for the Period April 1999 to June 2000, Calle Del Barco, Malibu, California,' dated August.

_____ (1999), 'Annual Observation & Maintenance Report for the Period April 1998 to March 1999, Calle Del Barco, Malibu, California,' dated April.

_____ (1998), 'Annual Observation & Maintenance Report for the Period July 1997 to April 1998, Calle Del Barco, Malibu, California,' dated April.

_____ (1997), 'Annual Observation & Maintenance Report for the Period July 1996 to July 1997, Calle Del Barco, Malibu, California,' dated July.

_____ (1996), 'Annual Observation & Maintenance Report for the Period July 1995 to July 1996, Calle Del Barco, Malibu, California,' dated August.

_____ (1995), 'Annual Observation & Maintenance Report for the Period July 1994 to July 1995, Calle Del Barco, Malibu, California,' dated September.

_____ (1994), 'Annual Observation & Maintenance Report for the Period July 1993 to July 1994, Calle Del Barco, Malibu, California,' dated September.

_____ (1993), 'Semi-Annual Observation & Maintenance Report for the Period January to July 1993, Calle Del Barco, Malibu, California,' dated September.

_____ (1992), 'Second Quarter Observation Report: Instrumentation and Dewatering Facilities at Calle Del Barco, Puerco Beach, and Latigo Canyon Landslide Sites', dated July 9.

_____ (1992), 'First Quarter Observation Report: Instrumentation and Dewatering Facilities at Calle Del Barco, Puerco Beach, and Latigo Canyon Landslide Sites,' dated April 7.

_____ (1991), 'Monitoring, Instrumentation, and Dewatering Facilities at Calle Del Barco, Puerco Beach, Latigo Canyon, and Rambla Pacifico (two wells) Landslide Sites,' dated October 4.

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY 19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**



David Taussig & Associates, Inc. (2019), "Annual Assessment Report for Fiscal Year 2019-2020, City of Malibu, Assessment District No. 98-2 (Calle del Barco)," dated June 10.

Fugro USA Land, Inc. (2019), "Annual Report, July 2018 through June 2019 Calle del Barco Landslide Assessment District, Malibu, California," dated November 19.

_____ (2019), "Annual Report, July 2017 through June 2018 Calle del Barco Landslide Assessment District, Malibu, California," dated March 8.

_____ (2018), "Annual Report, July 2016 through June 2017 Calle del Barco Landslide Assessment District, Malibu, California," dated March 19.

Fugro Consultants, Inc. (2017), "Annual Report, July 2015 through June 2016 Calle del Barco Landslide Assessment District, Malibu, California," dated November 4.

_____ (2016), "Annual Report, July 2014 through June 2015 Calle del Barco Landslide Assessment District, Malibu, California," dated November 3.

_____ (2015), "Annual Report, July 2013 through June 2014 Calle del Barco Landslide Assessment District, Malibu, California," dated April 2015.

_____ (2014), "Annual Report, July 2012 through June 2013 Calle del Barco Landslide Assessment District, Malibu, California," dated January 2014.

_____ (2012), "Annual Report, July 2011 through June 2012 Calle del Barco Landslide Assessment District, Malibu, California," dated September 2012.

_____ (2011), 'Annual Report, July 2010 through June 2011, Calle Del Barco Landslide Assessment District, Malibu, California,' dated November.

Fugro West, Inc. (2010), 'Annual Report, July 2009 through June 2010, Calle Del Barco Landslide Assessment District, Malibu, California,' dated April.

_____ (2009), 'Annual Report, July 2008 through June 2009, Calle Del Barco Landslide Assessment District, Malibu, California,' dated October.

_____ (2008), 'Annual Report, July 2007 through June 2008, Calle Del Barco Landslide Assessment District, Malibu, California,' dated October.

_____ (2007), 'Annual Report, July 2006 through June 2007, Calle Del Barco Landslide Assessment District, Malibu, California,' dated October.

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY 19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**




_____(2006), 'Annual Report, July 2005 through June 2006, Calle Del Barco Landslide Assessment District, Malibu, California,' dated August.

_____(2005), 'Annual Report, July 2004 through June 2005, Calle Del Barco Landslide Assessment District, Malibu, California,' dated October.

_____(2004), 'Annual Report, July 2003 through June 2004, Calle Del Barco Landslide Assessment District, Malibu, California,' dated November.





PLATES

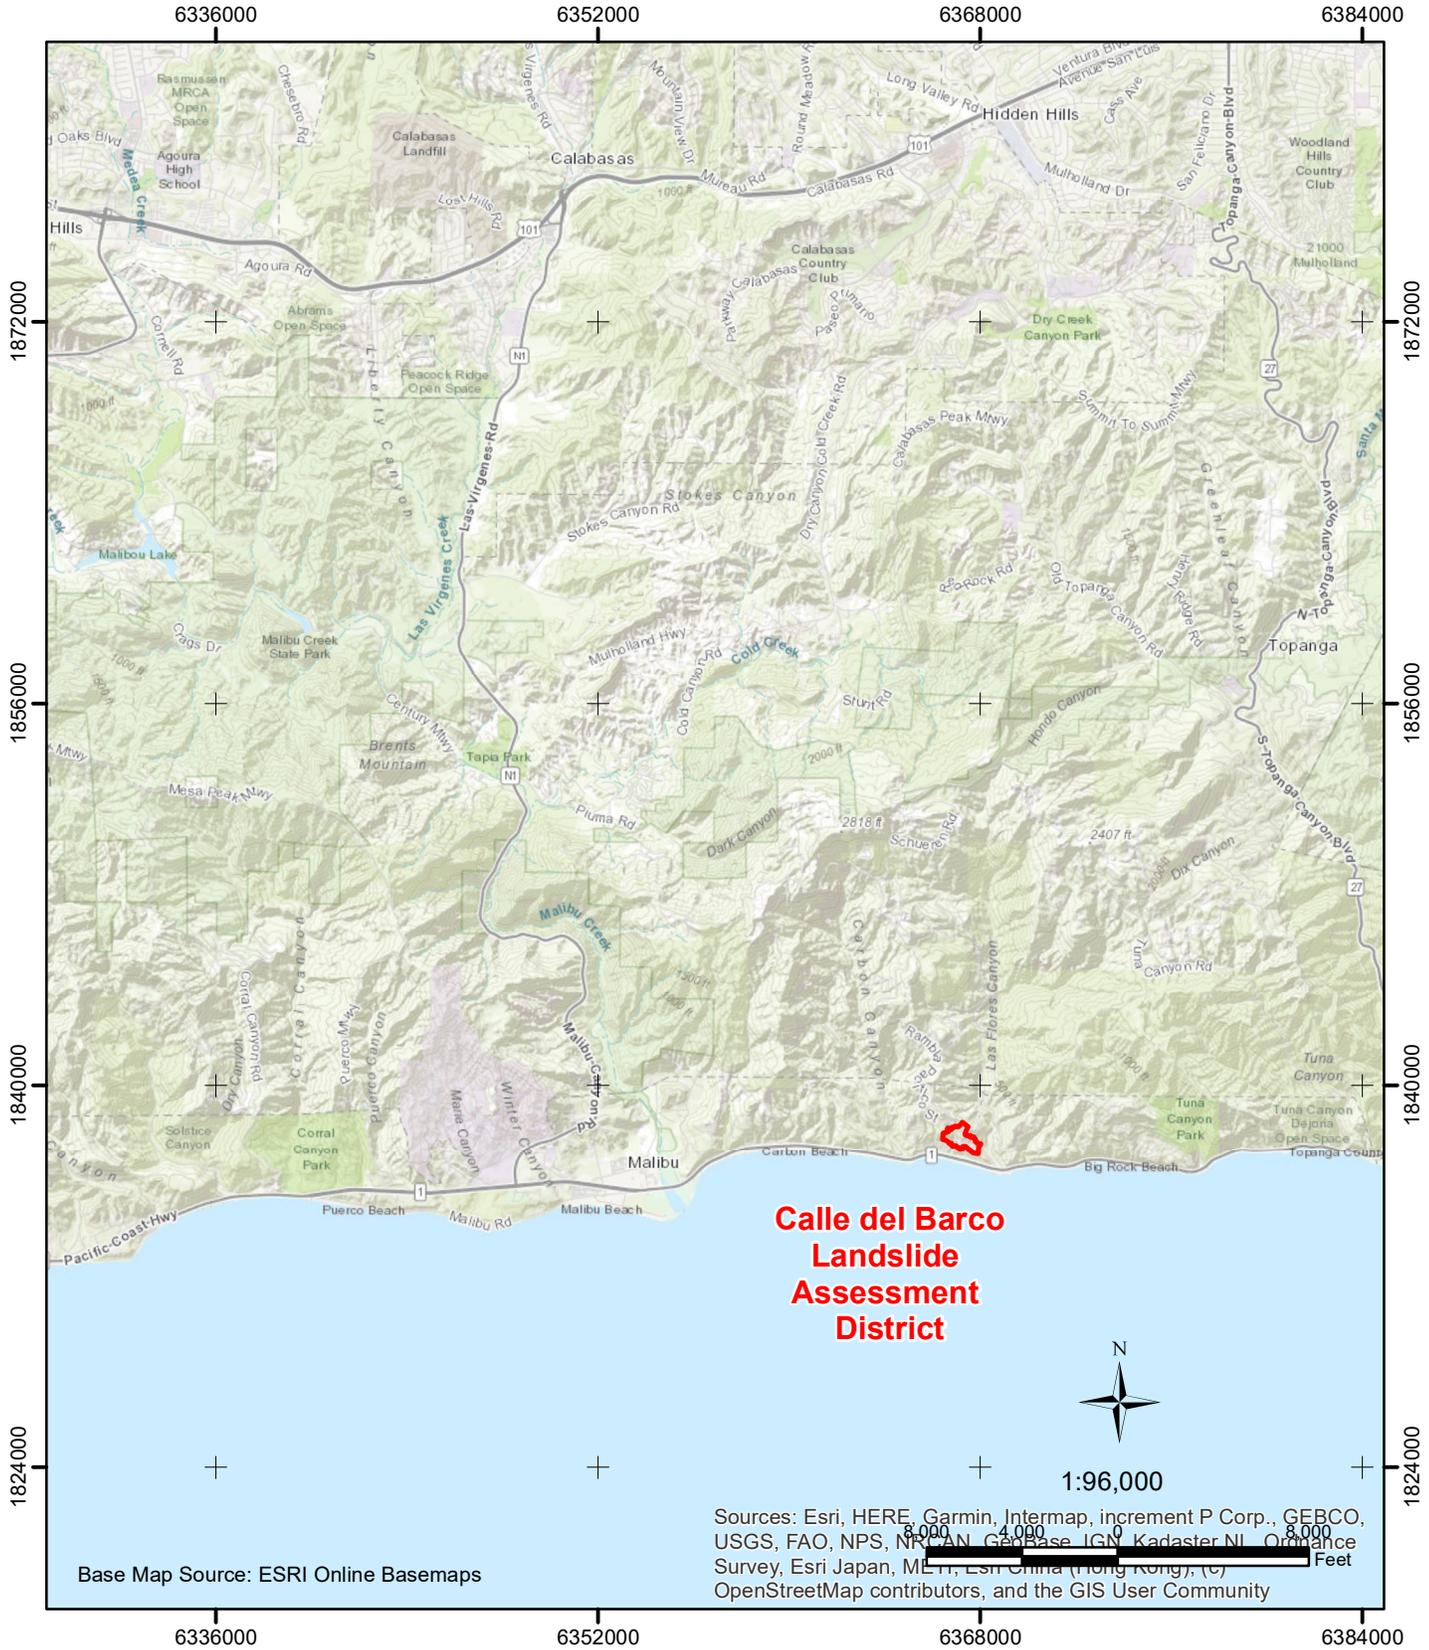


N:\Projects\3399_CityofMalibu\3399-005_CalleDelBarco\Outputs\2013_11_26_AnnualReport\mxd\Plate01_SiteLocation.mxd, 11/26/2013, CDean

SITE LOCATION MAP
Calle del Barco Landslide Assessment District
Malibu, California

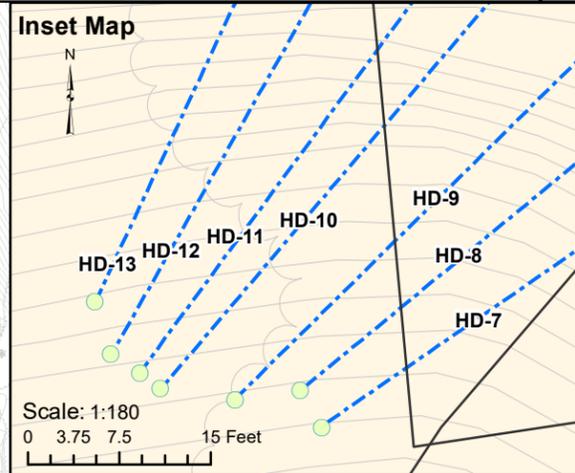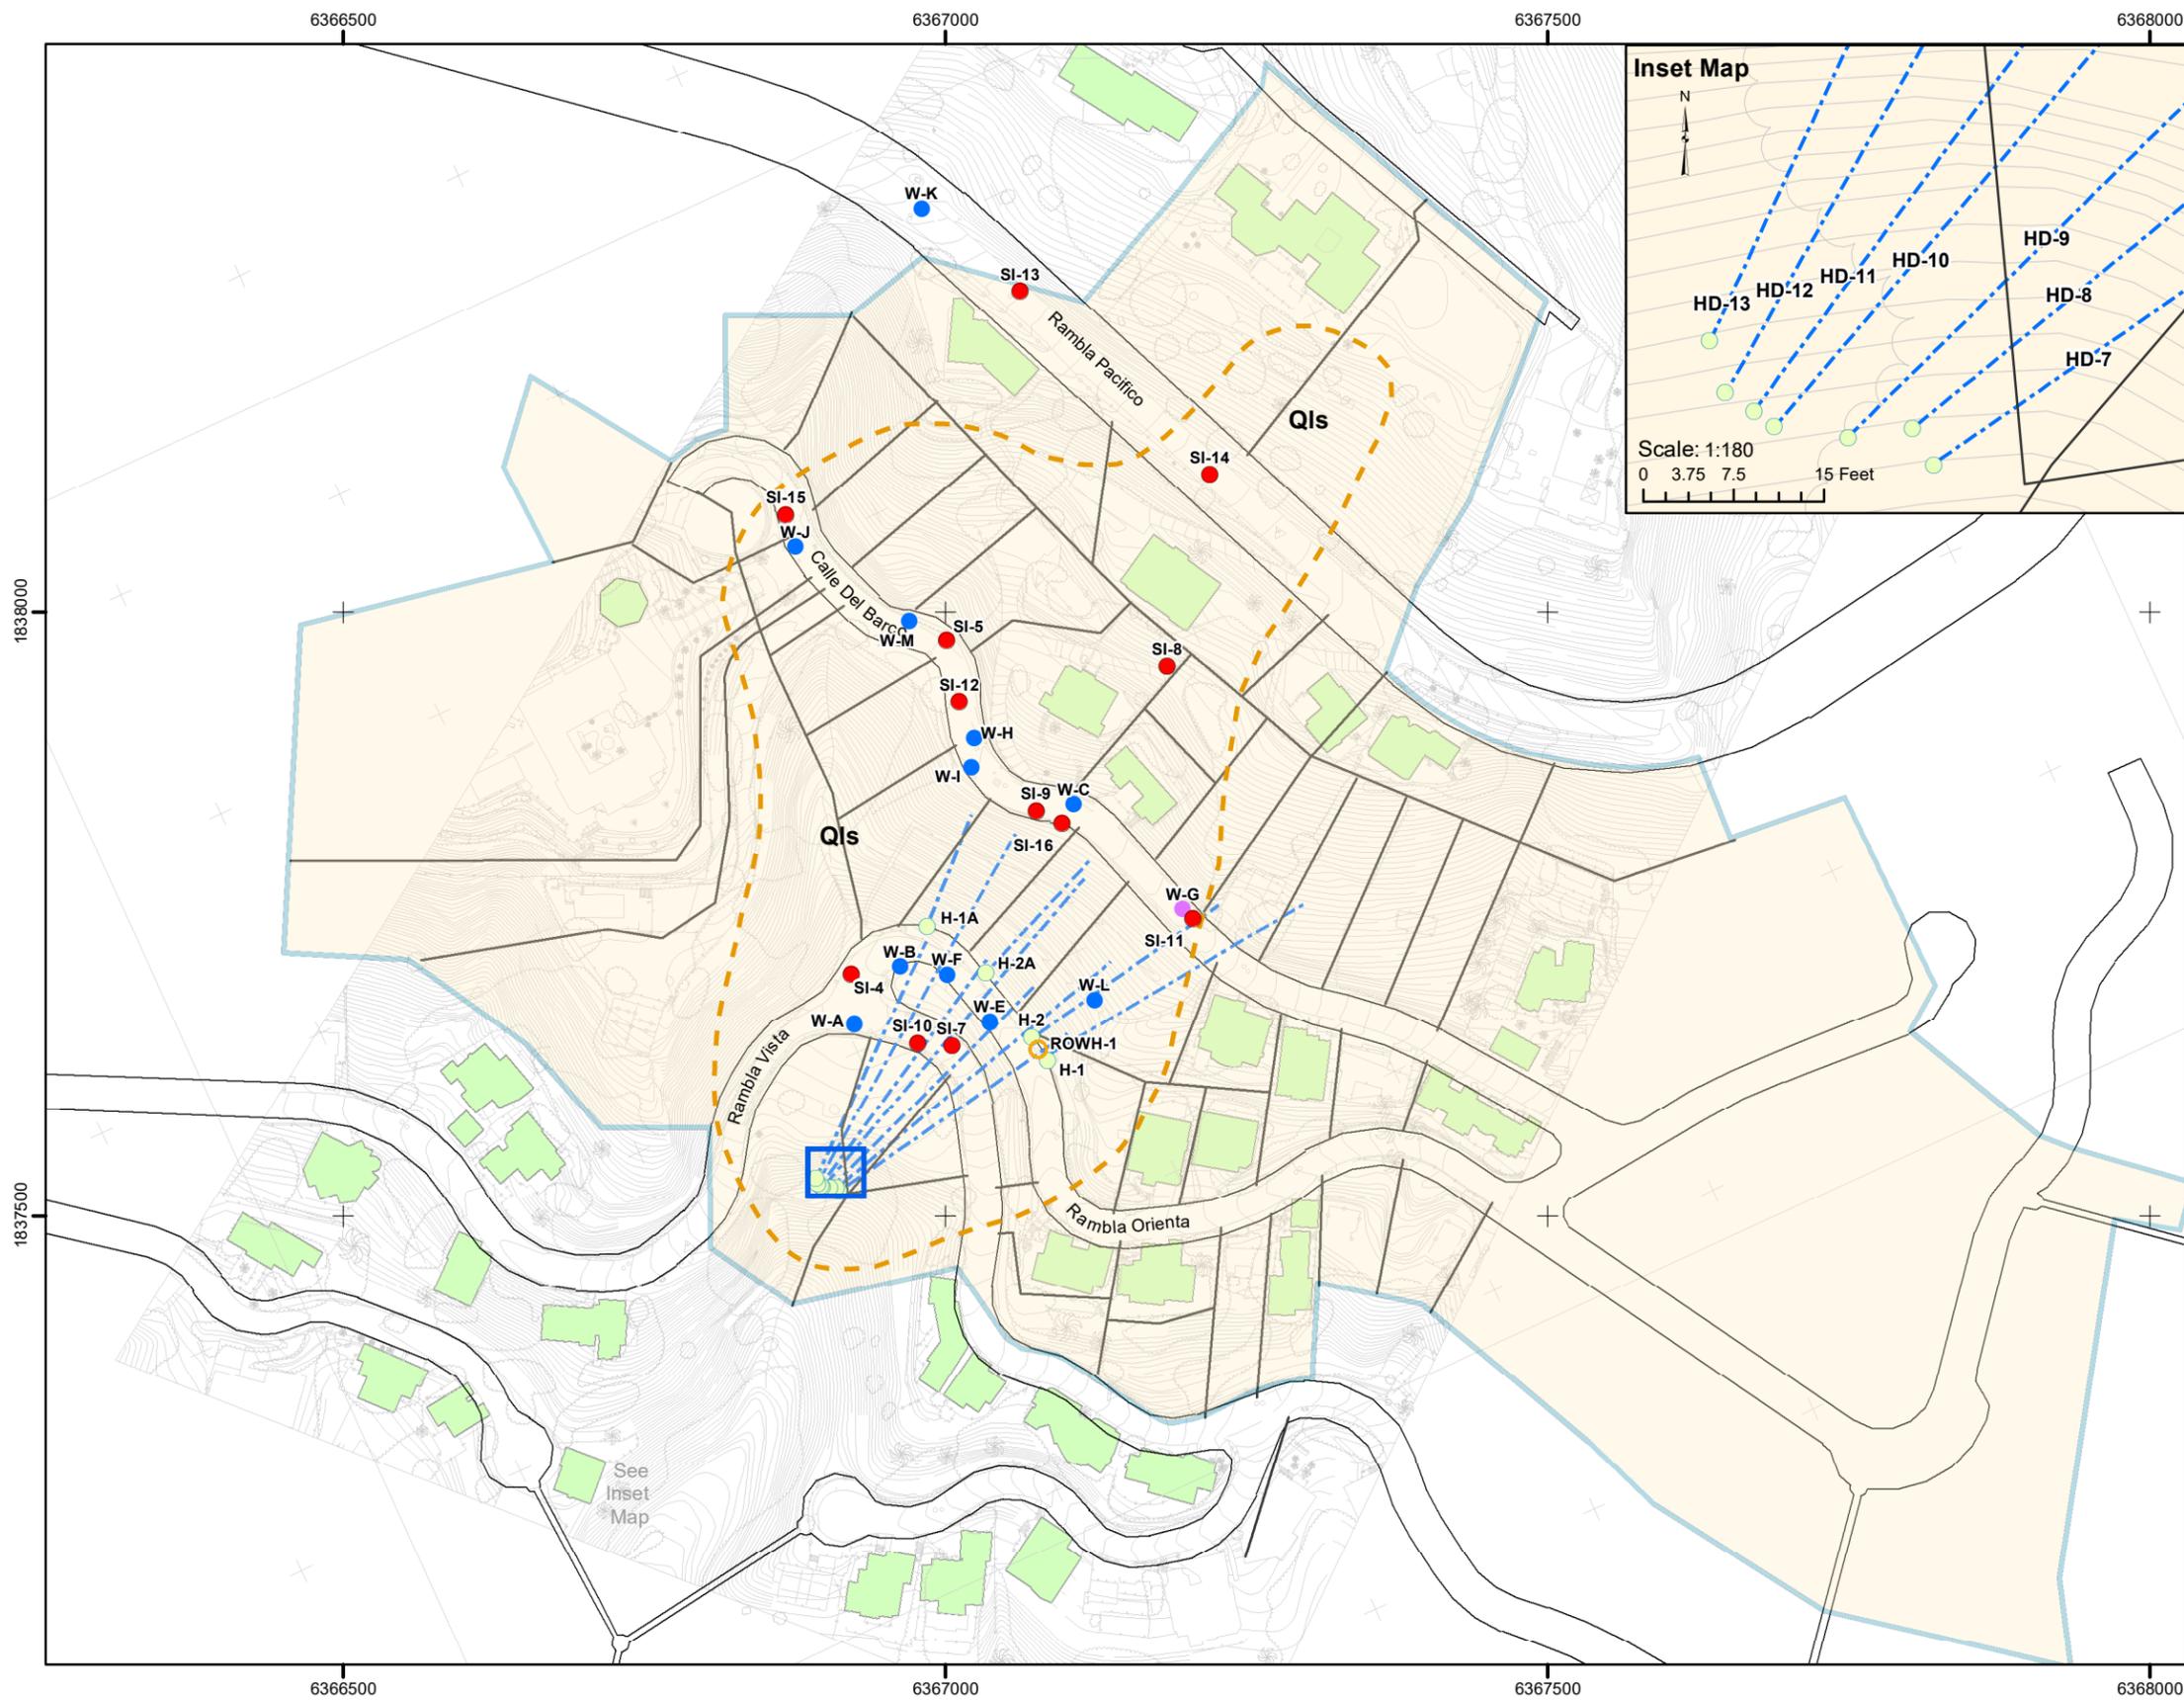


- LEGEND**
- Active Dewatering Well
 - Inactive Dewatering Well
 - Slope Inclinometer/Standpipe
 - ROWH-1 -Conveyance Line for H-2
 - - - Horizontal Drain (Hydrauger)
 - - - QIs
 - Assessment District Boundary
 - Extent of Horizontal Drain (Hydrauger) Inset
 - +
- Coordinate Grid: California State Plane, Zone 5, NAD 83, Feet

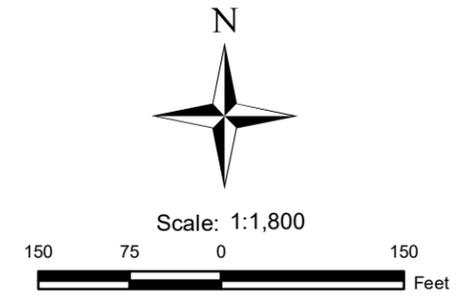



ASSESSMENT DISTRICT MAP
 Calle del Barco Landslide Assessment District
 Malibu, California

N:\Projects\04_2014\04_6214_0605_Calle_Del_Barco\Outputs\Working\mxd\CB_AssessmentDist.mxd, 10/24/2019, d.thornhill

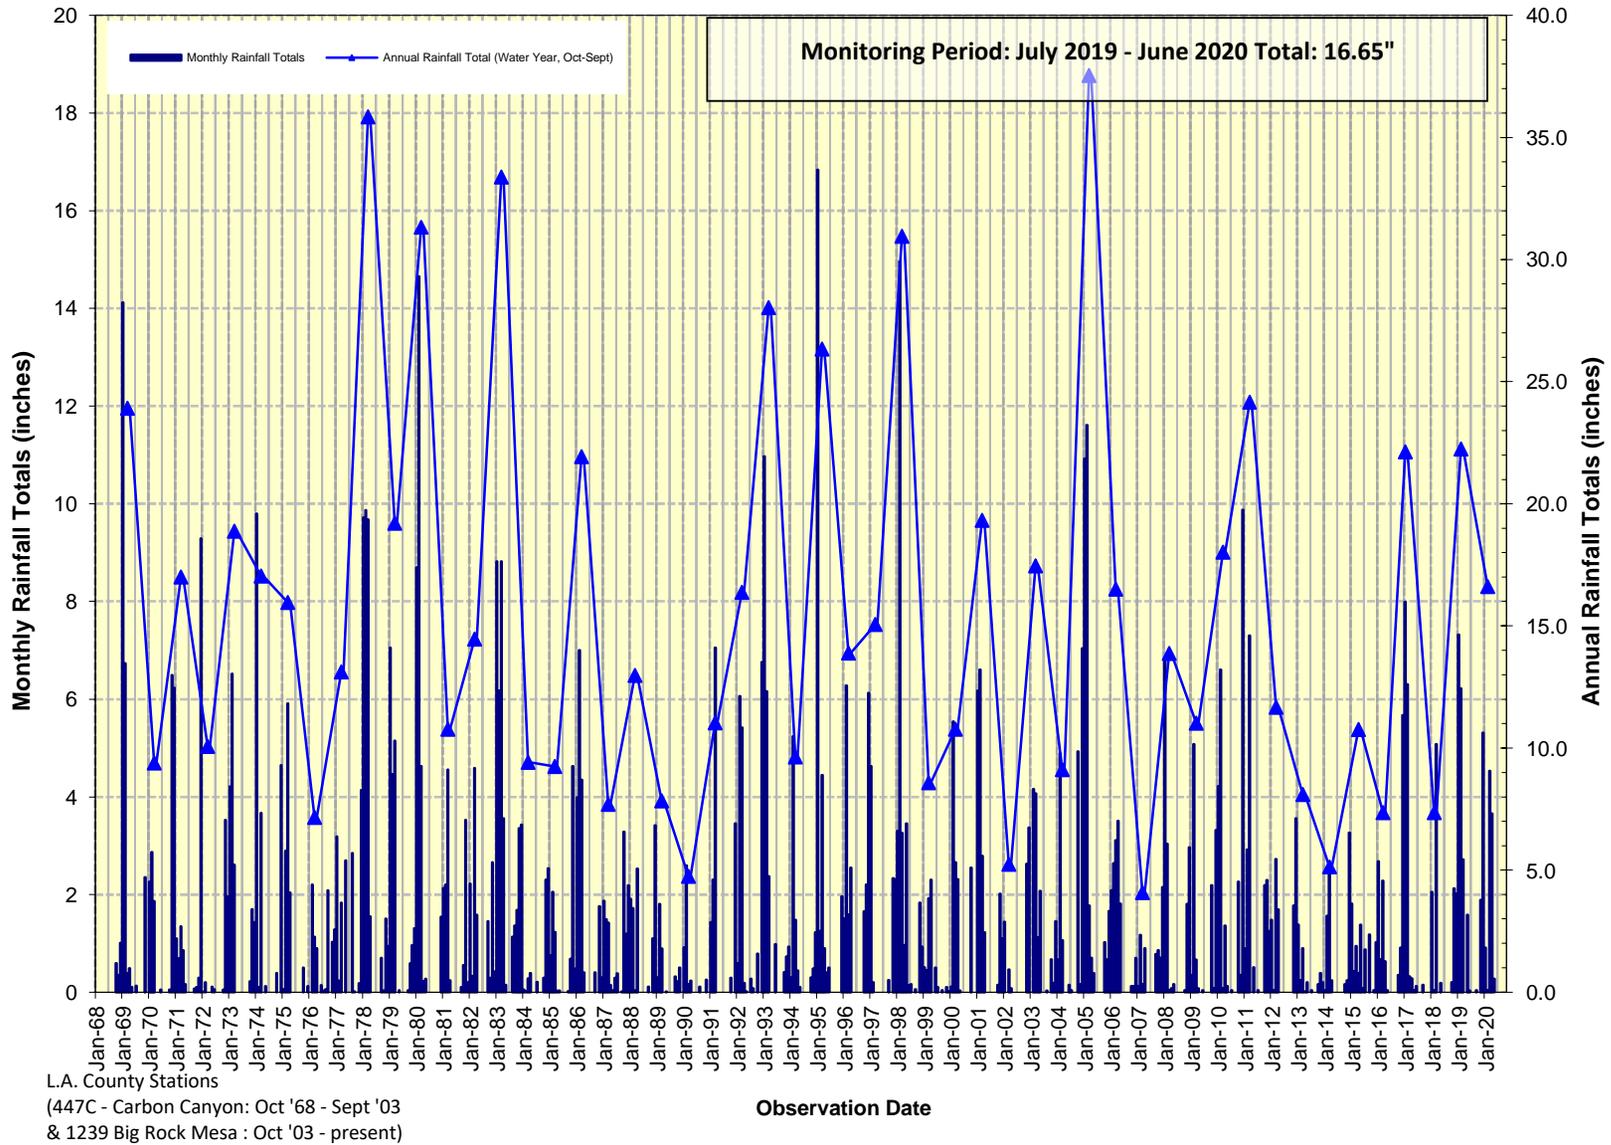



RAINFALL GRAPH
 Calle del Barco Landslide Assessment District
 Malibu, California

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
 FY19-20 ANNUAL REPORT
 MALIBU, CALIFORNIA**

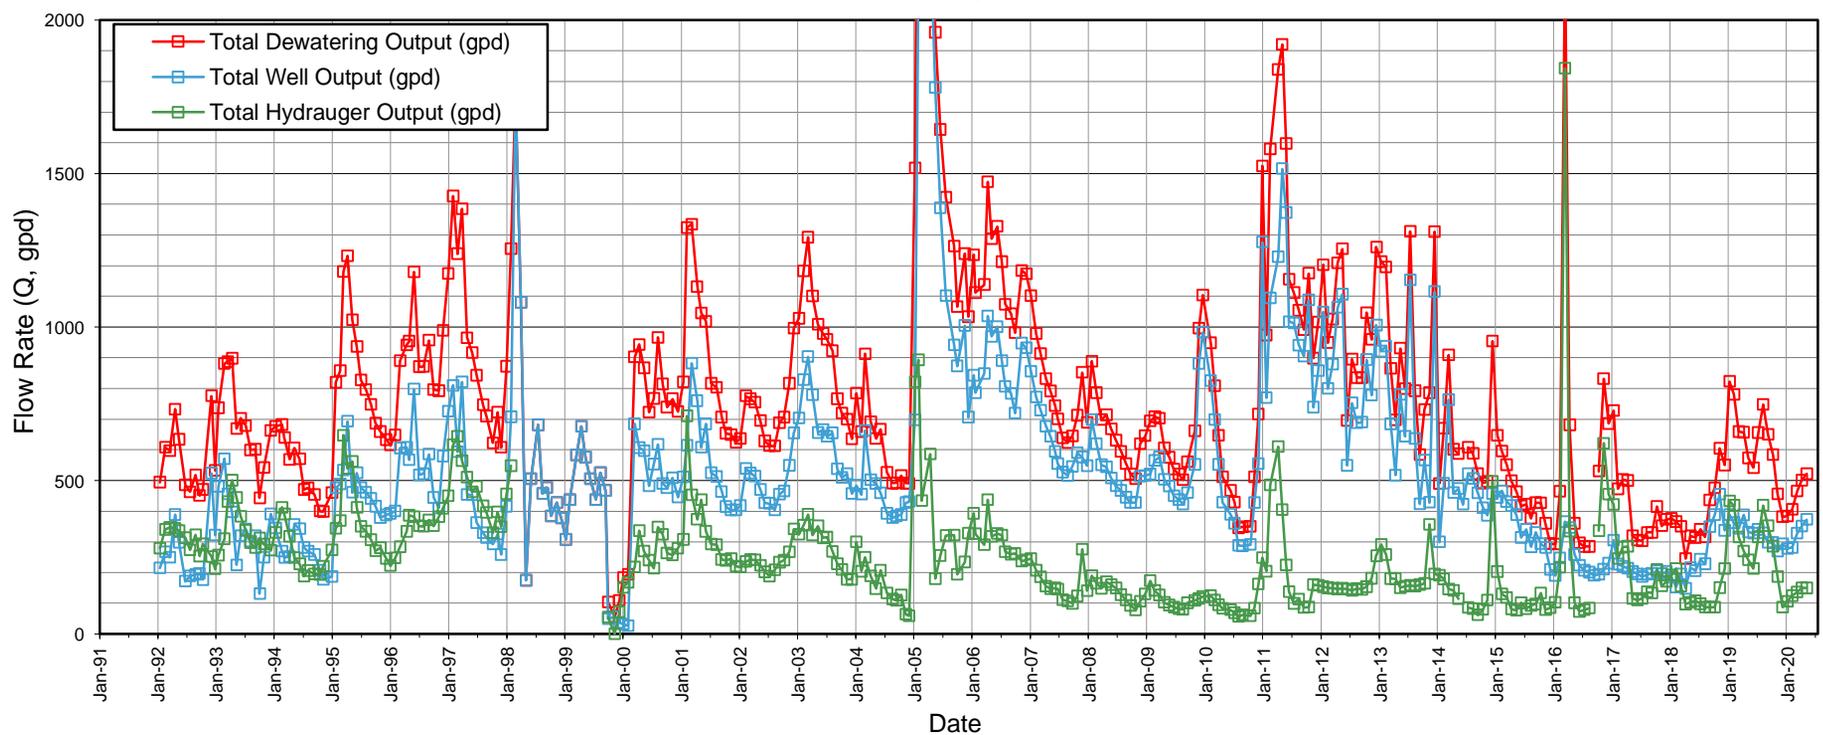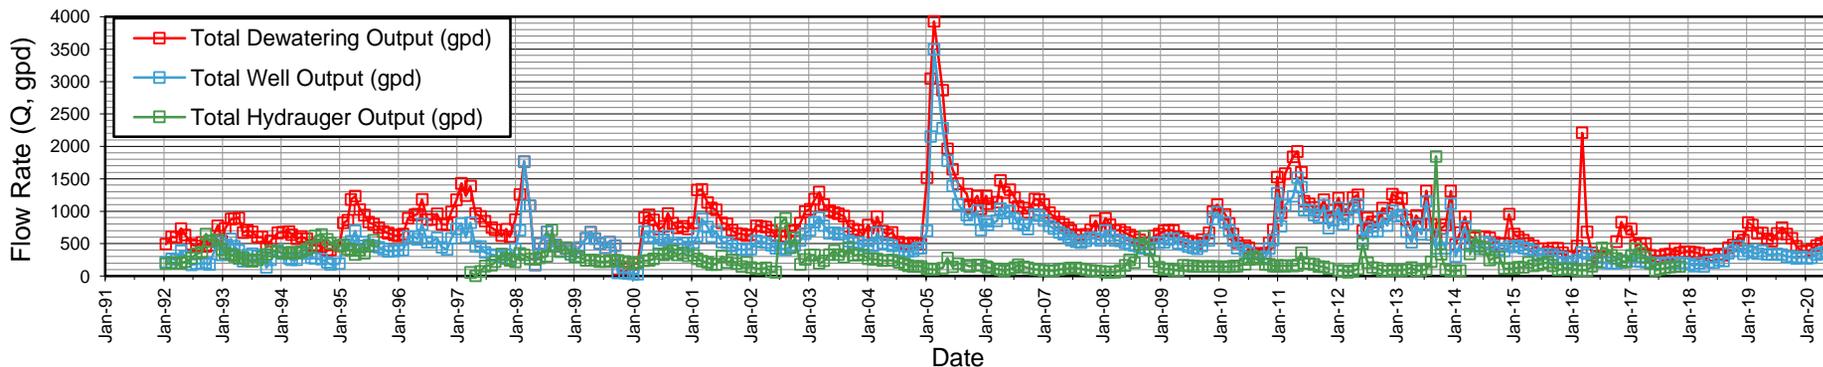

TOTAL DISCHARGE - WELLS AND HYDRAUGERS
 Calle del Barco Landslide Assessment District
 Malibu, California

CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
 FY19-20 ANNUAL REPORT
 MALIBU, CALIFORNIA

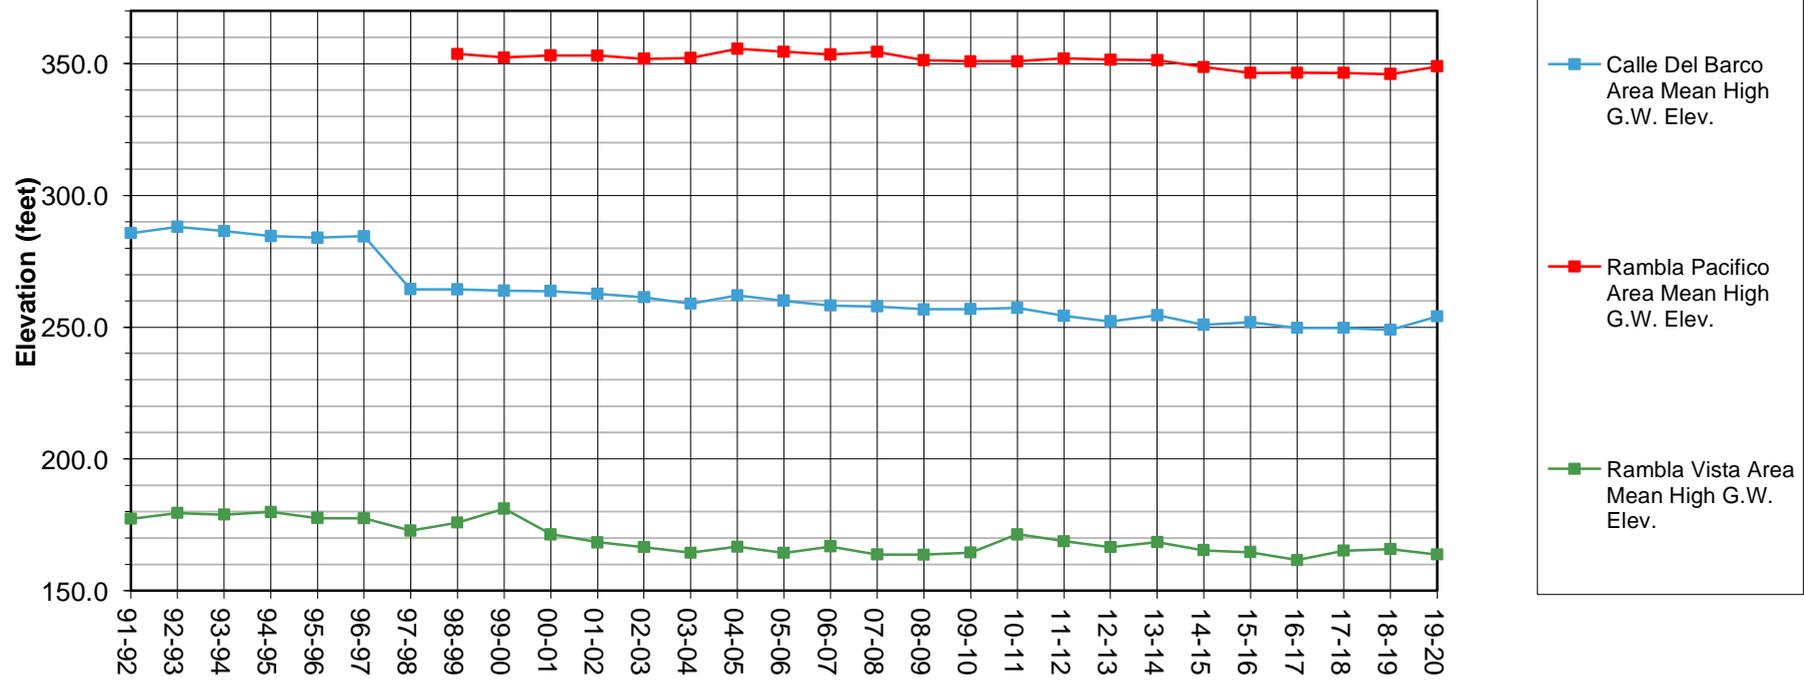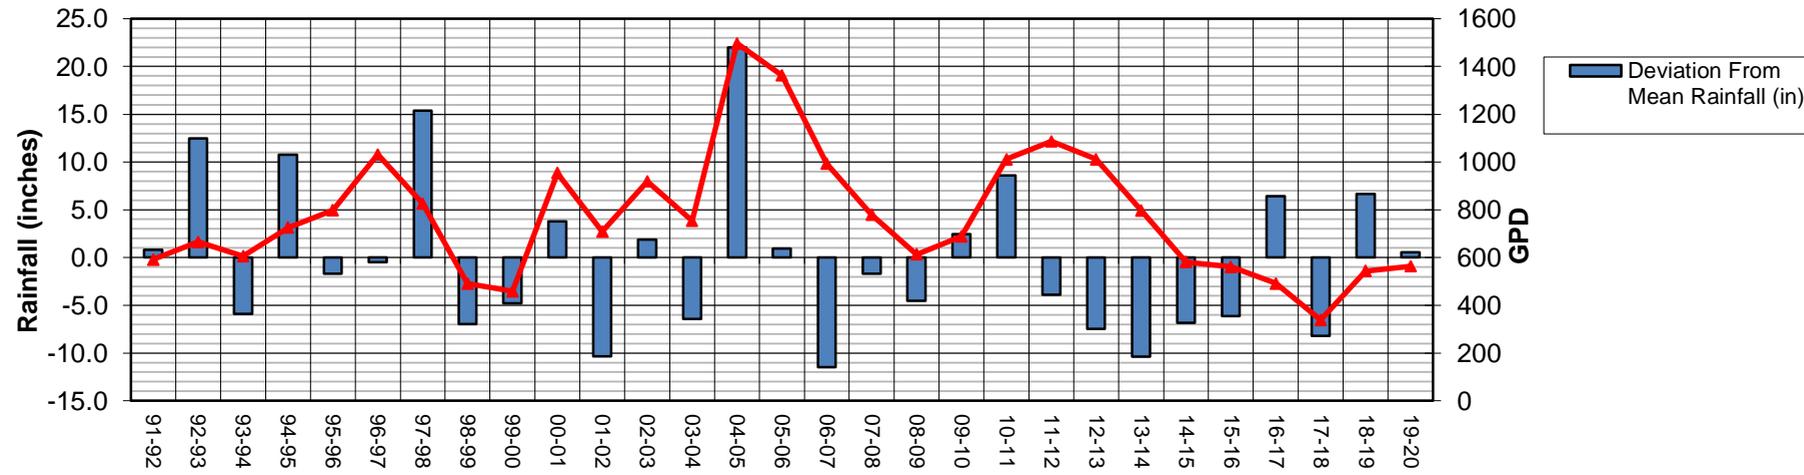

* Graph shows the average of the highest groundwater elevations recorded in each well/piezometer during the monitoring period.

GROUNDWATER LEVELS, DEWATERING AND RAINFALL
 Calle del Barco Landslide Assessment District
 Malibu, California



**APPENDIX A
GROUNDWATER DATA**

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**

CALLE DEL BARCO LAD - Standpipe Piezometer Information

Standpipe ID	Reference Elevation (ft)	Casing Depth (ft)	Perforation Interval (ft)	Installed By	Notes
SI-4	207.0	81.0	Unknown	Unknown	
SI-5	302.0	100.0	Unknown	Unknown	
SI-7	201.0	106.0	Unknown	Unknown	
SI-8	352.0	131.0	Unknown	Unknown	
SI-9	298.0	100.0	Unknown	Unknown	
SI-13	424.0	82.0	75-80	BYA	
SI-14	408.0	80.0	73-78	BYA	
SI-15	301.0	78.0	71-76	BYA	
SI-16	297.0	90.0	Unknown	Unknown	

CALLE DEL BARCO LAD - Pneumatic Piezometer Information


Piezometer ID	Tip No.	Reference Elev. (ft)	Tip depth (ft)	Tip Elev. (ft)	Installed By	Notes
SI-9	1	298	68	230	BYA	functioning
	2		38	260	BYA	0 PSI
SI-10	1	202	60	142	BYA	functioning
	2*		50	152	BYA	blocked air line
	3		40	162	BYA	0 PSI
	4		20	182	BYA	0 PSI
SI-11	1	291.5	60	231.5	BYA	functioning
	2 ^a		50	241.5	BYA	functioning
	3*		40	251.5	BYA	air line leak
	4 ^a		20	271.5	BYA	blocked air line
SI-12	1	301	60	241	BYA	functioning
	2		50	251	BYA	functioning
	3*		40	261	BYA	functioning
	4 ^a		20	281	BYA	0 PSI
SI-13	1 ^a	424	70	354	BYA	readings <0.3PSI
	2 ^a		50	374	BYA	readings <0.3PSI
SI-14	1	408	68	340	BYA	functioning
	2		48	360	BYA	functioning
SI-15	1	301	66	235	BYA	functioning
	2*		36	265	BYA	non functioning
SI-16	1	297	70	227	BYA	functioning
	2		40	257	BYA	functioning

* - Piezometer not functioning

^a - functionality not certain, readings not included in calculation of area averages


CALLE DEL BARCO - SUMMARY OF GROUNDWATER DATA																																								
Piezometer I.D.		91-92*	92-93	93-94	94-95	95-96	96-97	97-98	98-99	99-00**	00-01	01-02	02-03	03-04	04-05	05-06	06-07	07-08	08-09	09-10	10-11	11-12	12-13	13-14	14-15	15-16	16-17	17-18	18-19	19-20	Highest Ever Recorded	Mean '91 - '20	Stand. Dev.	19-20 vs 97-98	19 - 20 vs 18-19	19 - 20 vs Mean				
Rambla Vista																																								
SI-4	Mean El.	180.9	184.9	187.3	188.9	188.6	188.8	190.1	187.9	182.0	180.4	180.1	181.8	176.1	180.5	179.6	179.5	180.4	178.7	179.8	182.0	181.1	179.6	181.3	175.2	174.2	169.0	169.3	173.2	175.1	Mar-98	180.6	5.5	-15.0	1.9	-5.5				
	Max El.	185.7	189.4	189.3	193.0	190.1	192.0	193.6	190.7	183.5	185.0	181.7	182.7	180.6	188.2	181.2	183.0	182.1	180.7	185.2	185.7	185.2	180.7	182.9	177.5	177.5	171.3	178.8	180.1	181.4	193.6	184.1	5.2	-12.2	1.3	-2.7				
SI-7	Mean El.	167.8	168.5	167.3	165.8	163.9	162.7	162.8	162.7	173.9	160.3	156.5	154.5	153.6	153.8	154.3	153.9	153.6	153.2	153.1	158.2	153.7	155.7	158.2	152.4	151.3	151.9	151.1	151.0	151.1	Aug-99	157.8	6.4	-11.6	0.1	-6.7				
	Max El.	169.0	169.6	168.6	166.7	165.1	163.0	164.3	164.6	185.0	161.7	158.6	155.0	154.2	154.9	154.6	154.2	153.8	153.6	153.6	161.8	154.5	157.7	160.2	153.4	151.7	151.9	151.6	151.5	151.4	185.0	159.2	7.7	-12.9	-0.1	-7.8				
SI-10 TIP-1	Mean El.							167.3	167.7	170.6	169.3	168.1	166.0	165.2	164.5	161.2	158.2	158.5	162.4	163.0	165.5	163.9	159.3	159.3								Apr-07	164.5	3.8						
	Max El.							167.3	168.5	170.8	170.8	168.5	167.3	166.2	164.5	165.0	171.2	163.9	163.9	166.7	166.8	166.7	166.7	161.0	162.1								174.2	167.2	3.5					
SI-10 TIP-2	Mean El.							164.7	168.7	177.0	166.2	162.4	158.8	155.9	154.3	155.5	156.0	154.9	154.8	152.6														Jan-99	160.1	7.2				
	Max El.							165.8	179.6	185.4	168.1	164.7	161.2	156.6	154.3	156.6	158.7	155.5	156.6	152.6															185.4	162.7	10.0			
Area Average	Mean El.	174.4	176.7	177.3	177.4	176.3	175.7	171.2	171.7	175.9	169.0	166.8	165.3	162.7	163.3	162.6	161.9	161.8	162.3	162.1	168.6	166.2	164.9	166.3	163.8	162.8	160.2	160.2	162.1	163.1		167.3	5.9	-8.1	1.0	-4.2				
	Max El.	177.4	179.5	179.0	179.9	177.6	177.5	172.8	175.8	181.2	171.4	168.4	166.6	164.4	166.8	164.4	166.8	163.8	163.7	164.4	166.2	166.5	168.4	166.5	168.4	164.6	164.6	161.6	165.2	165.8	166.4		169.8	6.0	-6.4	0.6	-3.5			
Change vs Prior	Mean El.		2.3	0.6	0.0	-1.1	-0.5	-4.5	0.5	4.1	-6.8	-2.2	-1.5	-2.6	0.6	-0.7	-0.7	-0.1	0.4	-0.1	6.4	-2.3	-1.4	1.4	-2.5	-1.0	-2.6	0.0	1.9	1.0										
	Max El.		2.2	-0.6	0.9	-2.3	-0.1	-4.8	3.1	5.3	-9.8	-3.0	-1.8	-2.2	2.4	-2.4	2.4	-3.0	-0.1	0.7	7.0	-2.6	-2.3	1.9	-3.0	-0.9	-2.9	3.6	0.6	0.6										
Calle Del Barco																																								
SI-5	Mean El.	271.9	273.5	278.9	280.1	279.9	278.8	282.6	282.6	278.9	279.1	279.9	278.8	278.8	281.2	283.9	280.6	278.7	277.2	276.5	278.1	277.1	273.3	273.1	256.1	255.7	254.9	255.9	254.5	256.1	Mar-98	273.7	9.8	-26.5	1.6	-17.6				
	Max El.	275.9	283.5	280.9	285.1	282.6	280.2	287.5	285.1	279.9	281.1	280.6	279.7	279.6	287.0	285.1	283.7	280.8	278.7	279.2	279.4	277.8	279.2	276.6	274.2	256.4	257.7	255.3	265.1	255.5	259.0	287.5	276.3	10.0	-28.5	3.5	-17.3			
SI-8	Mean El.	288.6	290.0	287.5	279.8	283.8	286.0	290.7	293.0	291.9	292.2	290.5	289.8	289.6	293.2	293.7	290.7	287.2	286.9	286.8	286.9													Apr-05	287.8	3.7	-2.5	2.6	0.4	
	Max El.	295.4	292.6	292.1	284.0	285.3	288.7	296.6	294.2	295.2	295.2	292.7	291.8	291.6	297.7	294.7	293.6	288.8	287.5	286.8	286.9														297.7	290.6	4.1	-4.6	1.6	1.5
SI-9	Mean El.							228.2	225.6	228.2	228.7	226.8	225.8	225.6	226.1	227.7	226.1	224.7	224.2	224.2	224.0	224.6	223.4	223.5	221.6	221.5	221.9	221.1	220.7	222.2	222.2	Apr-98	224.6	2.4	-6.0	1.5	-2.4			
	Max El.							230.5	226.7	229.7	229.0	228.3	226.6	226.7	229.2	228.8	227.2	225.1	224.8	224.6	224.5	225.4	224.1	224.2	221.8	221.7	225.1	221.6	222.2	223.8	223.8	230.5	225.7	2.7	-6.8	1.6	-2.0			
SI-15	Mean El.							261.0	263.1	263.3	264.2	264.3	264.9	265.5	266.9	266.3	266.3	265.5	264.9	264.6	265.4	265.9	265.4	265.3	264.5	263.8	262.3	262.2	261.5	261.4	261.4	Jul-05 & Aug-05	264.2	1.7		-0.1	-2.8			
	Max El.							263.7	263.3	264.2	265.2	265.2	266.8	267.7	267.8	267.8	267.3	266.3	265.8	265.5	265.8	266.4	266.4	265.9	266.0	264.8	264.3	262.9	262.9	261.7	261.7	267.8	265.0	1.6		-1.2	-3.3			
SI-16	Mean El.													229.8	231.6	232.7	230.1	228.5	227.9	227.9	227.7	228.8	227.6	227.6	224.4	224.3	224.4	224.0	224.7	225.0	Apr-05	227.5	2.7		0.3	-2.5				
	Max El.													230.9	236.1	234.5	231.7	228.8	228.5	228.3	228.7	229.9	228.5	228.8	224.8	224.5	224.9	224.6	225.9	226.1	236.1	228.6	3.4		0.2	-2.5				
SI-9 TIP-1	Mean El.							244.1	246.7	248.7	245.9	243.5	242.1	244.1	242.0	244.1	242.0	236.8	242.3	245.2	244.1	242.0	239.0	235.5	235.4		238.1	238.3	236.4	236.3	239.2	Jan-Feb-00	240.6	4.1						
	Max El.							249.6	247.3	254.2	247.3	245.0	243.8	243.8	248.4	245.0	243.8	239.2	239.8	240.8	240.9	240.9	236.3	236.3		238.1	242.7	236.9	239.2	239.2	254.2	242.6	4.7							
SI-9 TIP-2	Mean El.							267.8	263.8	261.2	262.9																								Mar-98	263.9	2.8			
	Max El.							274.3	266.9	261.2	263.5																									274.3	266.2	5.3		
SI-11 TIP-1	Mean El.							235.0	234.4	237.5	236.8	236.3	235.3	235.2	240.0	235.7	235.3	235.0	234.7	234.5	235.0	234.3	240.3	240.9			234.7	235.0	235.0	233.8	233.8	Apr-05	235.8	2.1						
	Max El.							236.1	239.6	238.4	237.3	237.3	236.1	236.1	245.3	239.6	238.2	235.5	235.0	235.0	239.0	235.5	242.4	241.9			235.0	236.1	236.1	233.8	233.8	245.3	237.4	2.9						
SI-11 TIP-2	Mean El.							242.7	243.7	243.8	242.8	242.7	242.9	242.7	242.7	242.7	242.7	242.8	242.8	242.5	242.1	242.1	242.1	242.1											Jan-00	242.8	0.6			
	Max El.							242.7	245.0	246.1	243.8	243.8	242.7			243.2	243.2	243.2	243.8	242.7	242.1	242.1	242.1	243.2											246.1	243.6	1.2			
SI-12 TIP-1	Mean El.							273.2	269.1	268.0	266.9	266.4	264.6	264.6	268.5	268.1	268.1	266.9	265.9	265.3	264.7	263.6	260.1	260.7			265.2	257.6	256.9	257.1	264.0	May-98	264.6	4.1	-9.2					
	Max El.							275.5	269.8	268.6	267.5	267.5	265.2	268.6	269.8	269.8	268.8	268.8	266.5	266.3	265.7	265.7	261.1	262.9			268.6	258.3	257.1	257.1	264.0	275.5	265.9	4.5	-11.5					
SI-12 TIP-2	Mean El.							275.2	273.9	272.5	270.9	268.7	266.9	267.1	267.1	269.2	266.7	266.7	265.2	264.8	264.6	263.0	258.9	259.0			268.3	257.4	257.7	257.9	255.6	Jun-98	265.3	5.6	-19.6					
	Max El.							276.3	275.2	272.9	271.7	270.6	267.1	267.1	270.6	268.3	268.3	266.8	266.5	266.5	260.2	260.8					272.9	257.9	257.9	257.9	255.6	276.3	266.9	6.1	-20.7					
SI-12 TIP-3	Mean El.							274.2	270.8	269.8	269.7	268.3	266.4	268.7	267.9	269.9	269.9	268.9	268.9	266.9	266.9	266.6	265.6	264.4											Oct-07	262.2	3.1			
	Max El.							274.8	272.5	272.5	273.7	270.2	267.9	267.9	273.7	273.7	269.1	274.8	271.9	269.1	268.5	267.3	264.5	265.0											274.8	269.1	4.1			
SI-15 TIP-1	Mean El.							271.2	270.4	270.6	271.1	271.0	271.6	274.0	273.0	271.6	271.6	270.7	270.2	271.3	270.2	271.3	2																	

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**

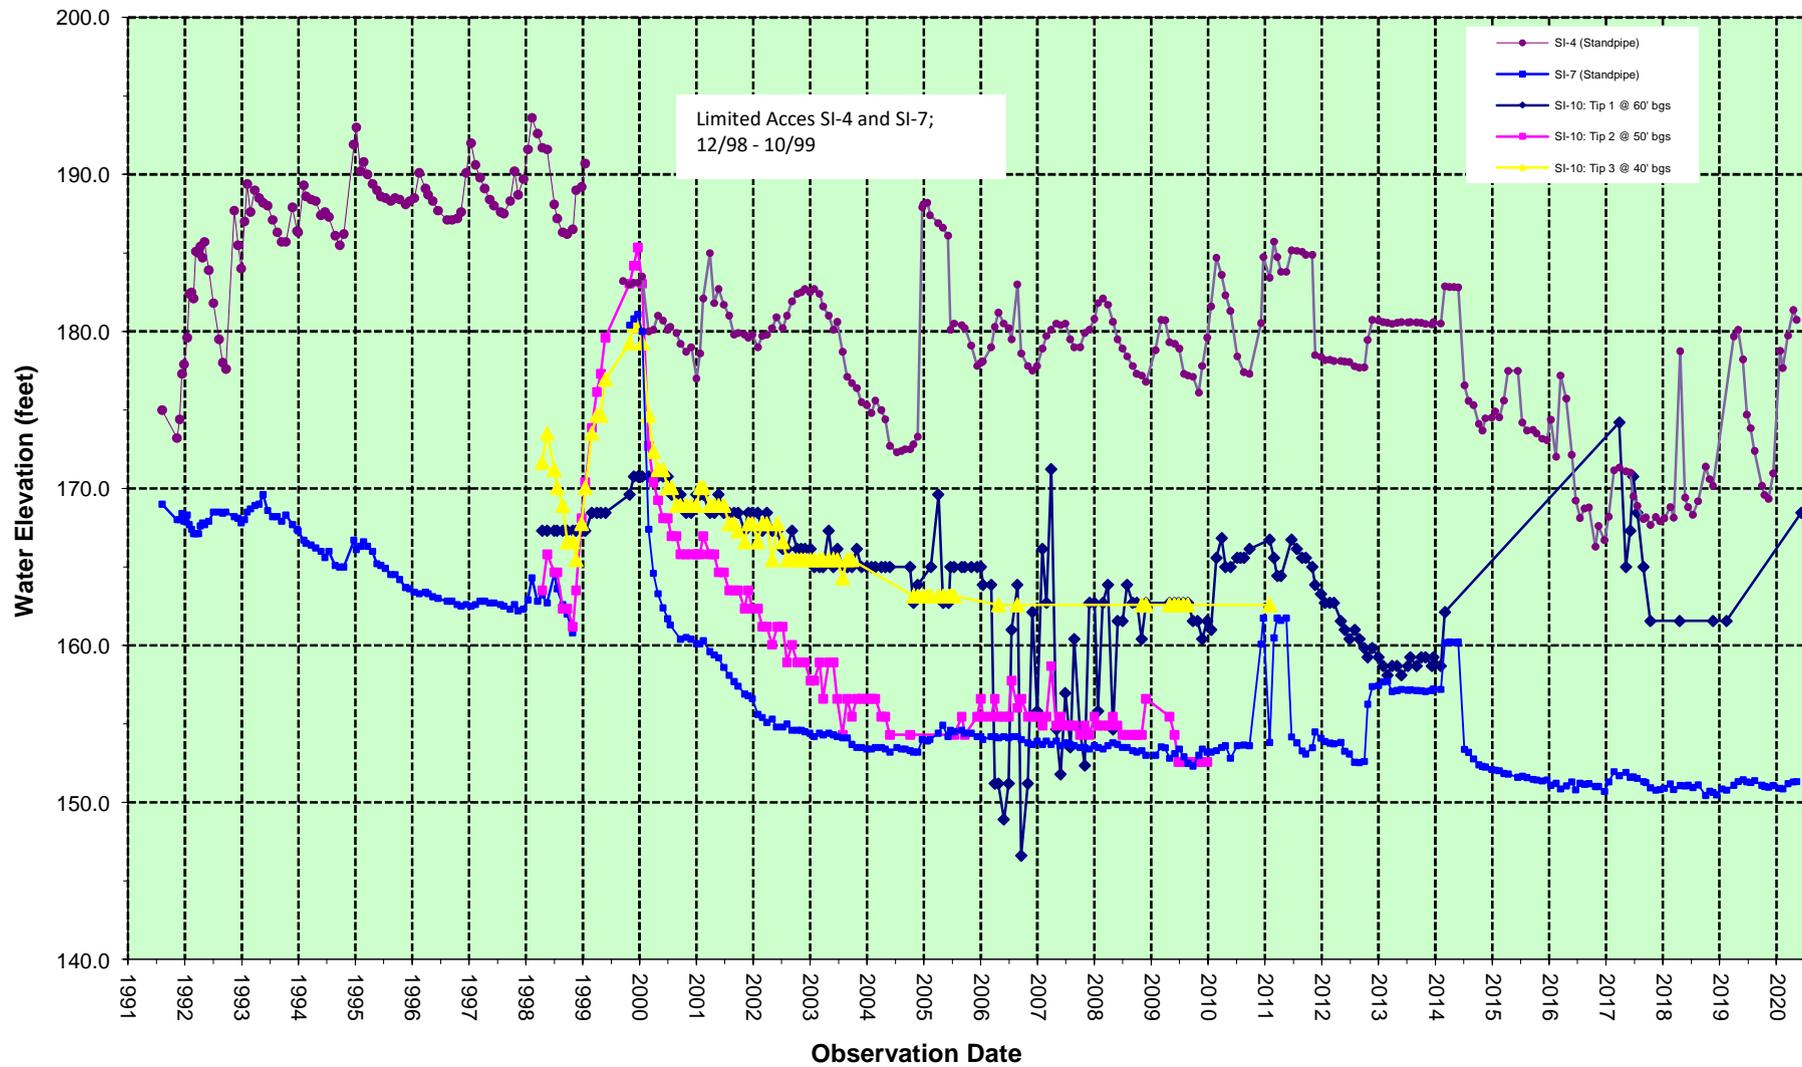


GROUNDWATER HYDROGRAPH
Rambla Vista
Calle del Barco Landslide Assessment District
Malibu, California

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**

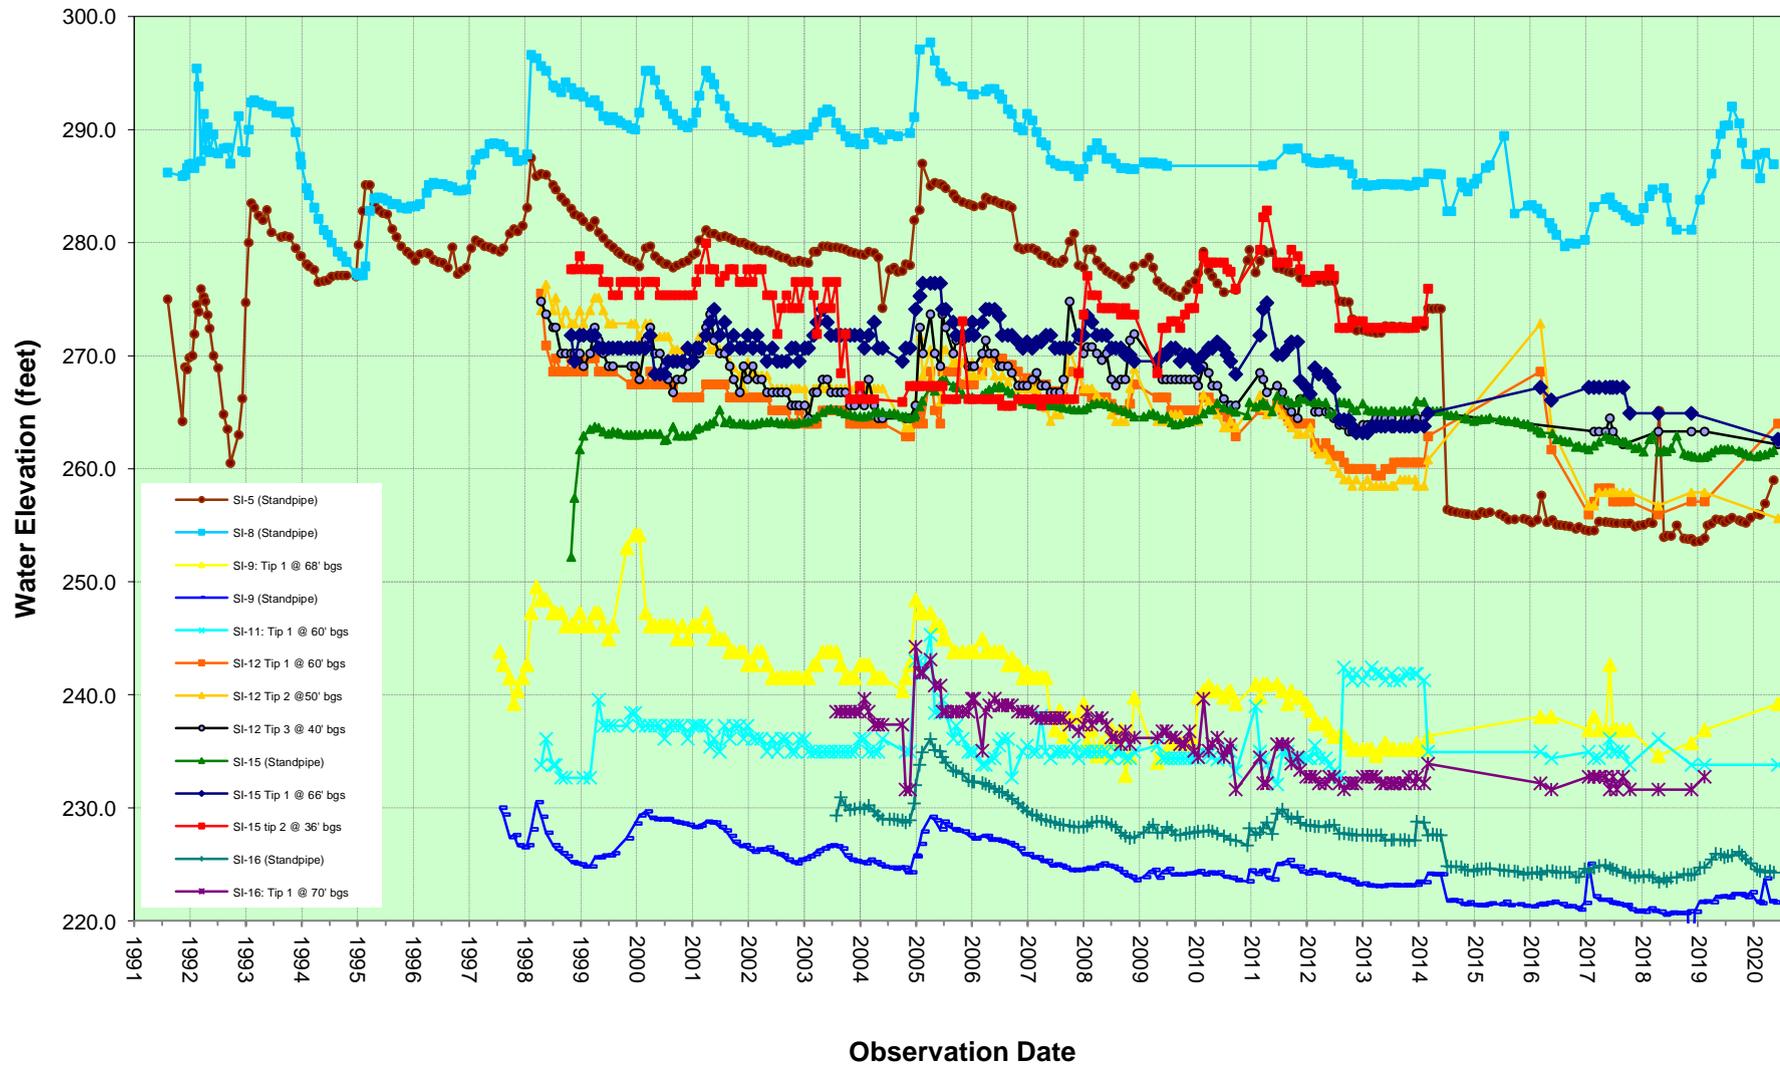

GROUNDWATER HYDROGRAPH
Calle del Barco
Calle del Barco Landslide Assessment District
Malibu, California

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**

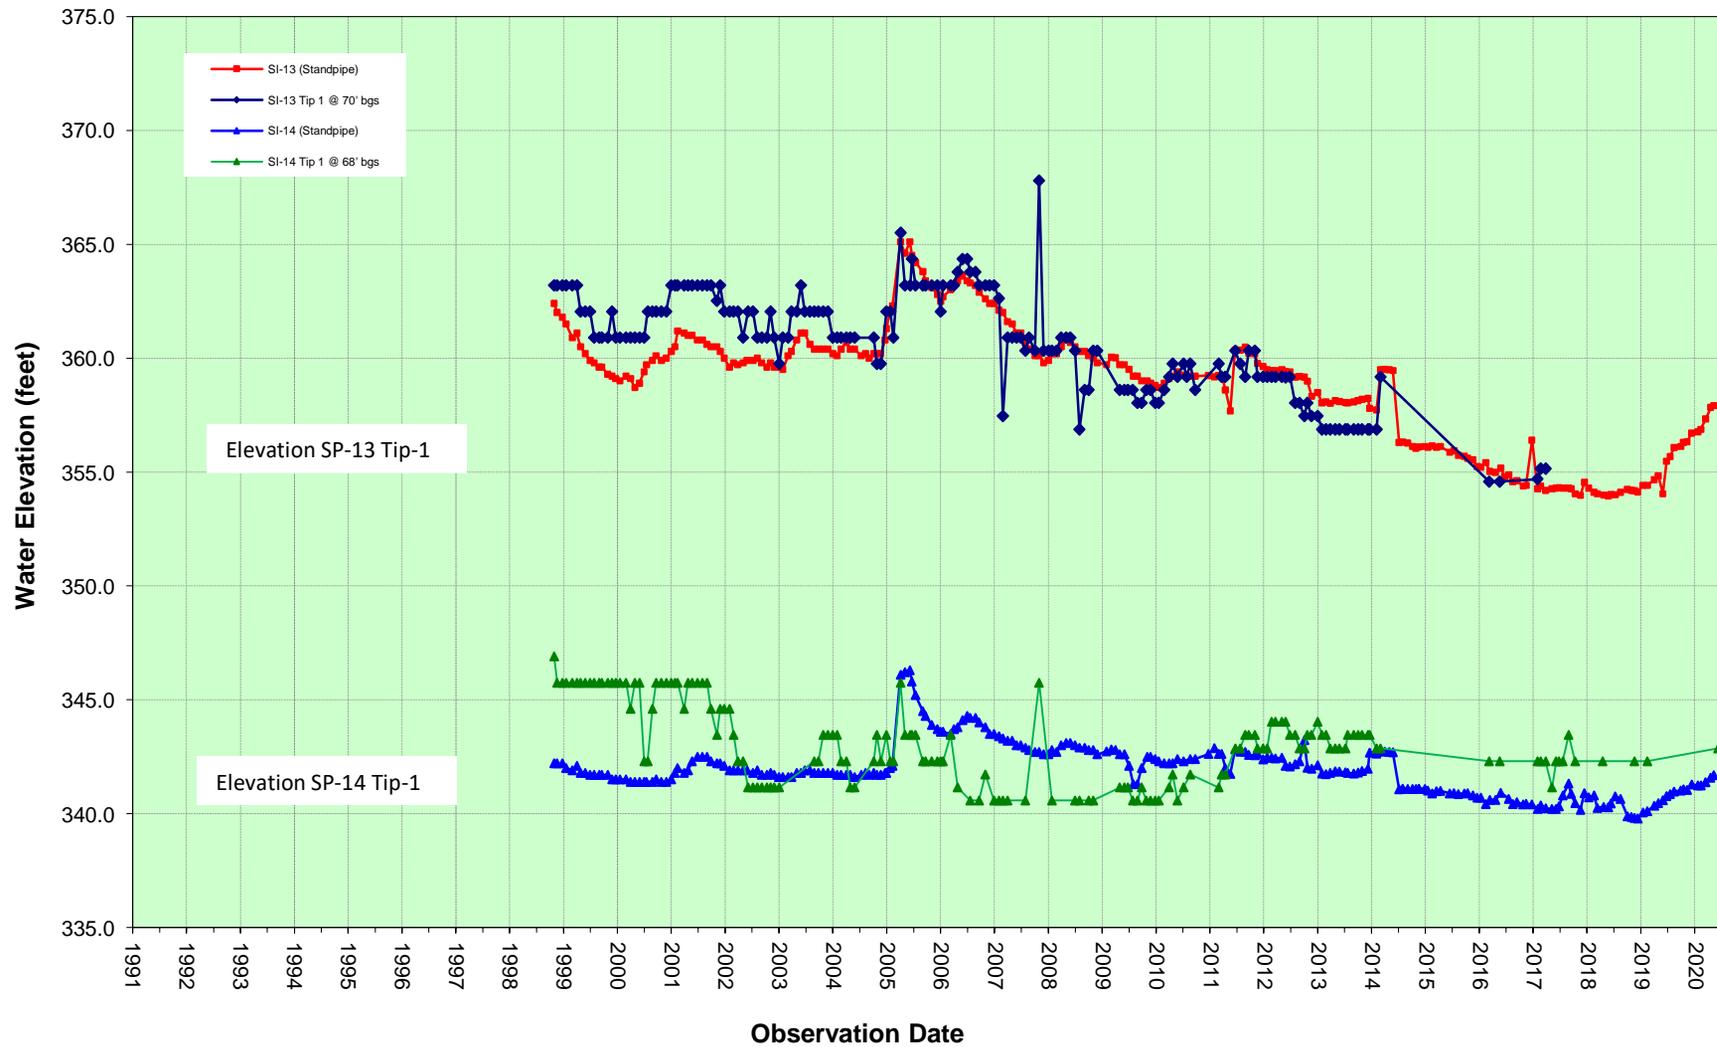

GROUNDWATER HYDROGRAPH
Rambla Pacifico
Calle del Barco Landslide Assessment District
Malibu, California



**APPENDIX B
DEWATERING DATA**

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
 FY19-20 ANNUAL REPORT
 MALIBU, CALIFORNIA**

Dewatering Well Information							
Well ID	Vault Elevation (ft.)	Bottom Elevation (ft.)	Pump Elevation (ft.)	Pump Size (hp)	2019-2020 Pumping Rate (gpd)	% of Total Well Production	Comment
W-A	196.0	Unknown	45.0	1/2	18.5	6%	
W-B	204.0	Unknown	54.0	1/2	0.8	0%	
W-C	295.0	Unknown	233.0	1/2	70.4	22%	
W-D*	297.0	Unknown	Unknown	none	0.0	0%	Destroyed '98
W-E	215.0	Unknown	116.5	1/2	27.7	9%	
W-F	210.0	109.0	112.0	1/2	72.6	23%	
W-G*	292.0	222.0	223.0	1/3	0.0	0%	No Pump
W-H	299.5	234.5	242.5	1/3	2.8	1%	
W-I	298.0	238.0	248.0	1/3	37.3	12%	
W-J	304.0	244.0	254.0	1/3	20.6	7%	
W-K	430.0	370.0	380.0	1/3	0.0	0%	Dry
W-L	258.0	189.0	192.5	1/2	19.5	6%	
W-M	302.0	237.0	Unknown	Unknown	44.0	14%	



Note: * Non-functioning Dewatering Wells

Hydrauger Information						
Hydrauger ID	Installed Length (ft)	Functional Length (ft)	2019-2020 Flow Rate (gpd)	% of Total Production	Installed By	Comment
HD-12	93	unknown	0	0%	BYA	Destroyed per BYA (2000)
HD-2	127	unknown	0	0%	BYA	Destroyed per BYA (2000)
HD-3	155	unknown	0	0%	BYA	Destroyed per BYA (2000)
HD-4	80	unknown	0	0%	BYA	Destroyed per BYA (2000)
HD-5	65	unknown	0	0%	BYA	Destroyed per BYA (2000)
HD-6	97	unknown	0	0%	BYA	Destroyed per BYA (2000)
HD-7	227	unknown	0	0%	BYA	no production '18-'19
HD-8	290	unknown	0	0%	BYA	no production '18-'19
HD-9	230	unknown	0	0%	BYA	no production '18-'19
HD-10	330	unknown	0	0%	BYA	no production '18-'19
HD-11	230	unknown	0	0%	BYA	no production '18-'19
HD-12	330	unknown	0	0%	BYA	no production '18-'19
HD-13	210	unknown	91	44%	BYA	
H-1	240	unknown	116	56%	LA County	
H-2	180	unknown	0	0%	LA County	No outlet to monitor
ROWH-1	--	unknown	0	0%	BYA	discharge diverted from H-2
H-3	235	unknown	0	0%	LA County	Destroyed 1998
H-4	140	unknown	0	0%	LA County	Destroyed 1998
H-5	260	unknown	0	0%	LA County	Destroyed 1998
H-6	140	unknown	0	0%	LA County	Destroyed 1998
H-7	205	unknown	0	0%	LA County	Destroyed 1998
H-1A	100	92	0	0%	Fugro	no production '18-'19
H-2A	130	125	2	1%	Fugro	

DEWATERING WELL / HYDRAUGER INFORMATION



Calle del Barco Landslide Assessment District
 Malibu, California

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
 FY19-20 ANNUAL REPORT
 MALIBU, CALIFORNIA**

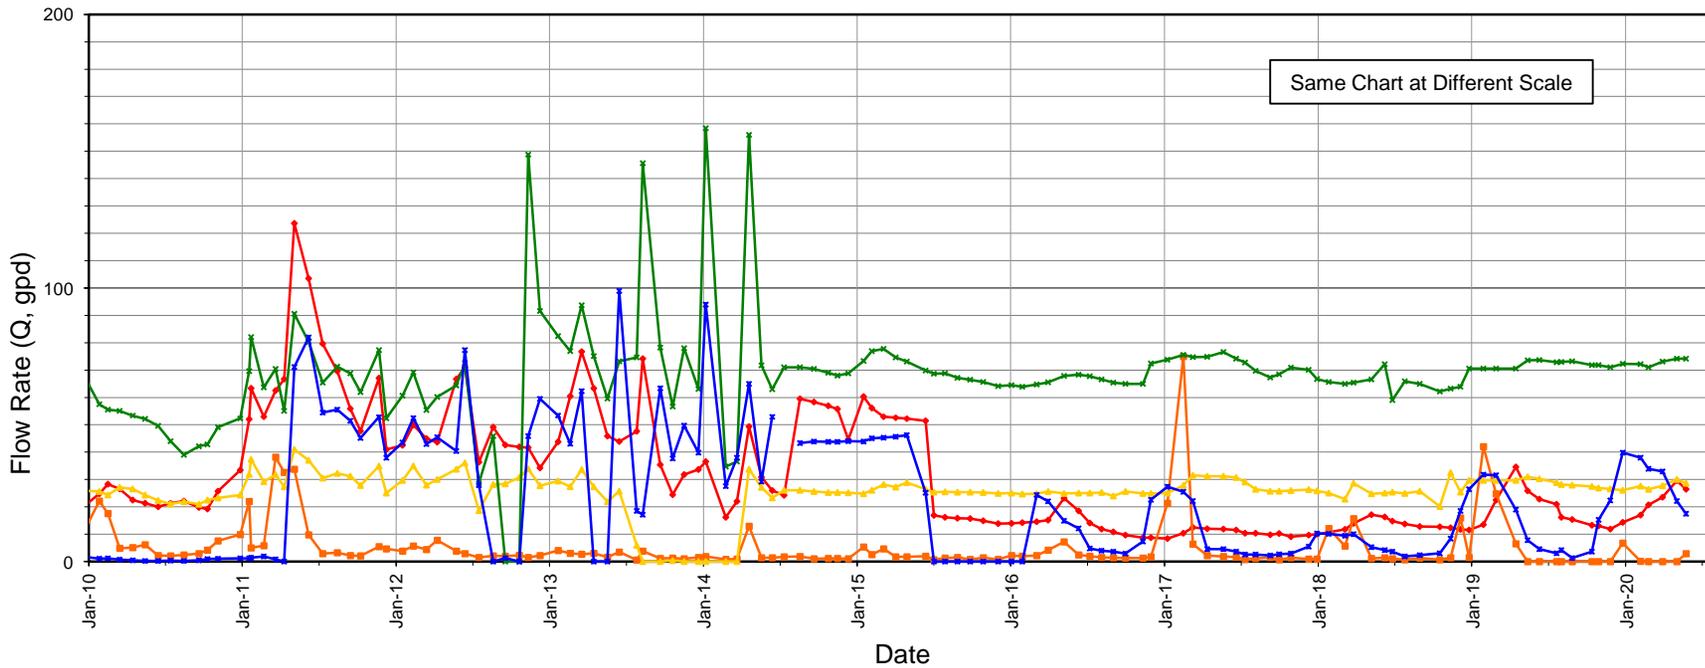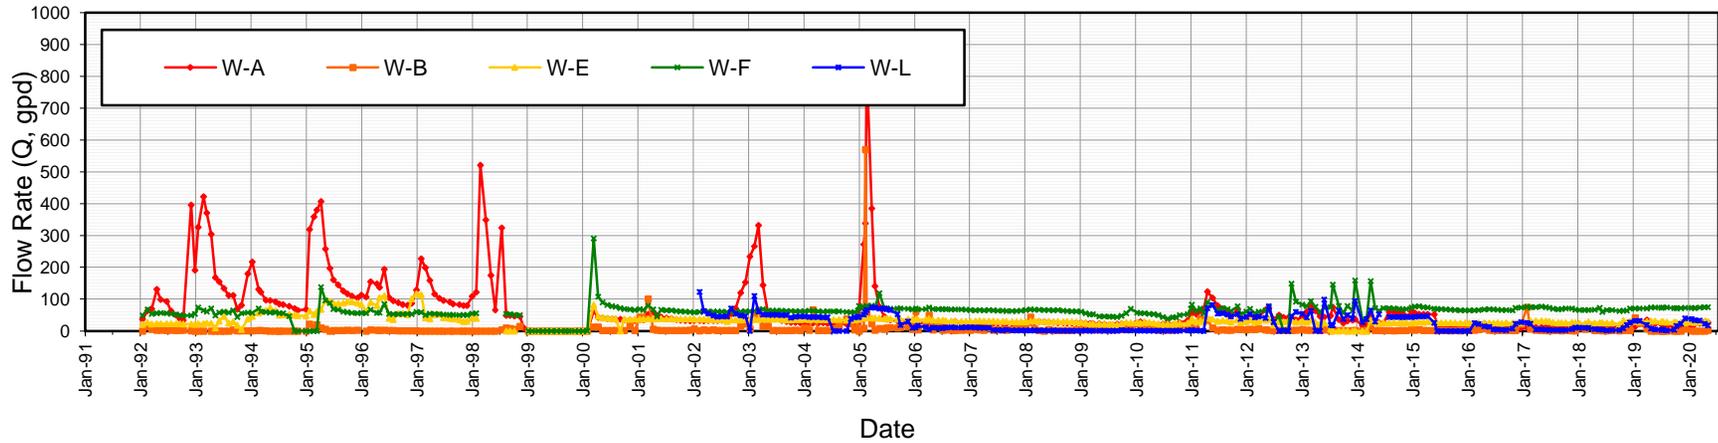


DEWATERING WELL DISCHARGE RATE GRAPH
Rambla Orienta and Slope
 Calle del Barco Landslide Assessment District
 Malibu, California

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
 FY19-20 ANNUAL RPEORT
 MALIBU, CALIFORNIA**

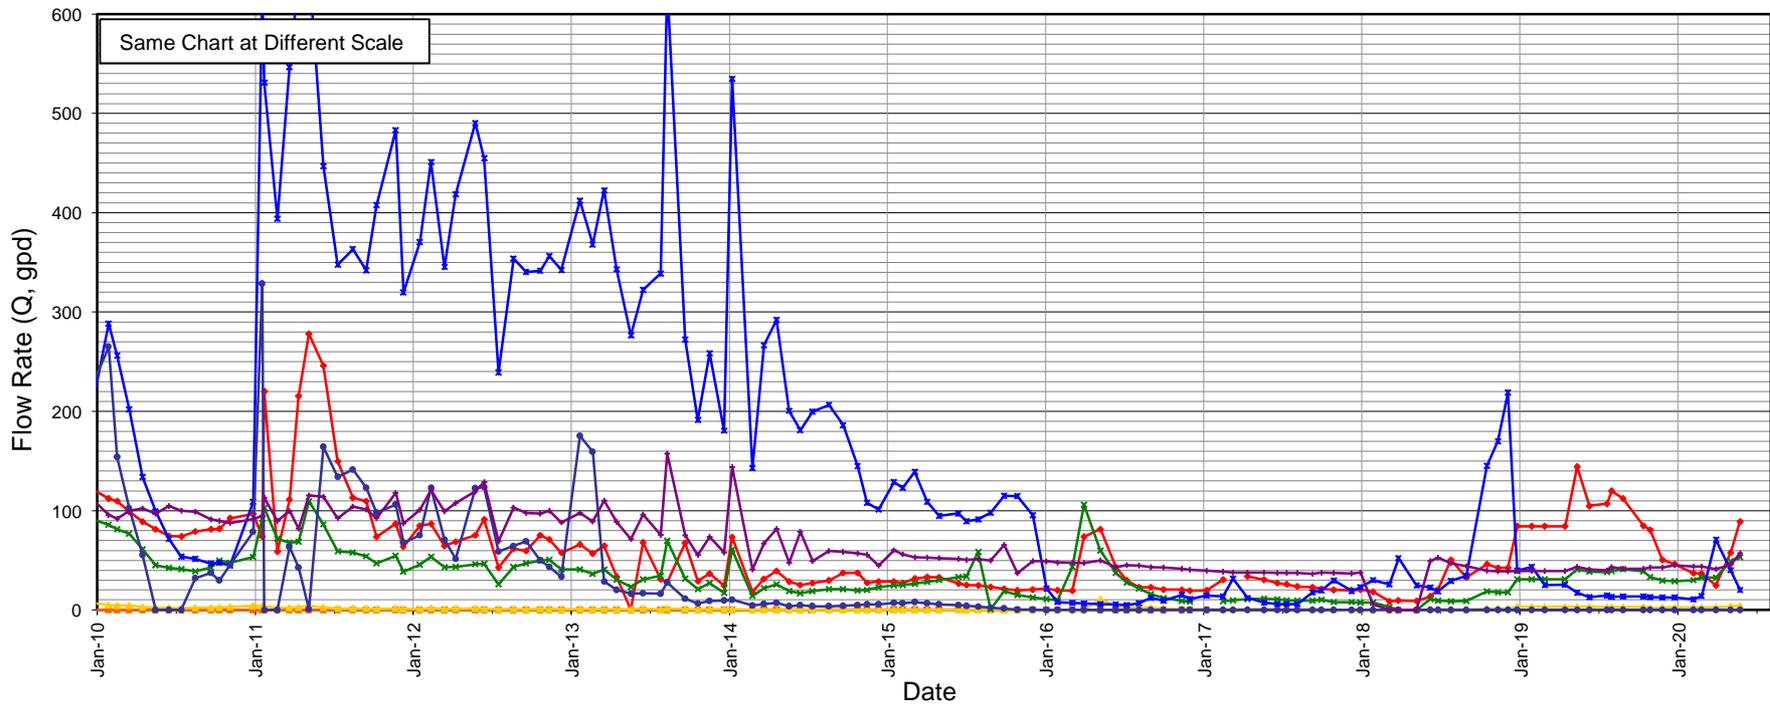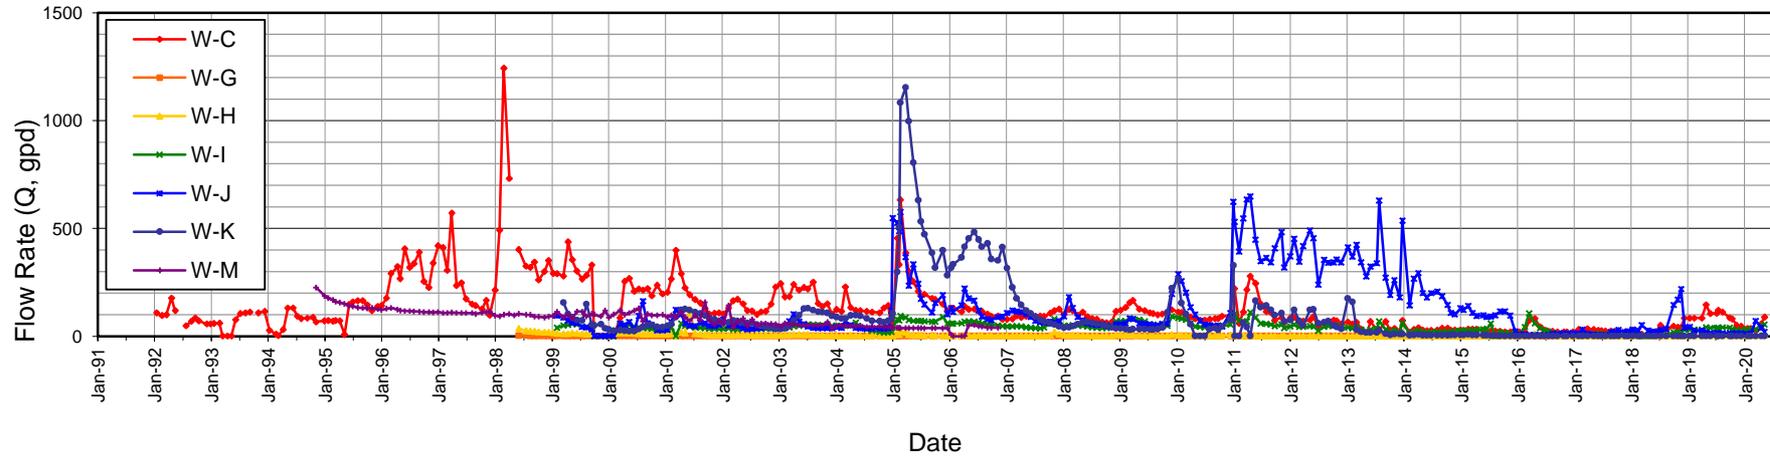


DEWATERING WELL DISCHARGE RATE GRAPH
Calle del Barco and Rambla Pacifico
 Calle del Barco Landslide Assessment District
 Malibu, California

CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY19-20 ANNUAL REPORT
MALIBU, CALIFORNIA

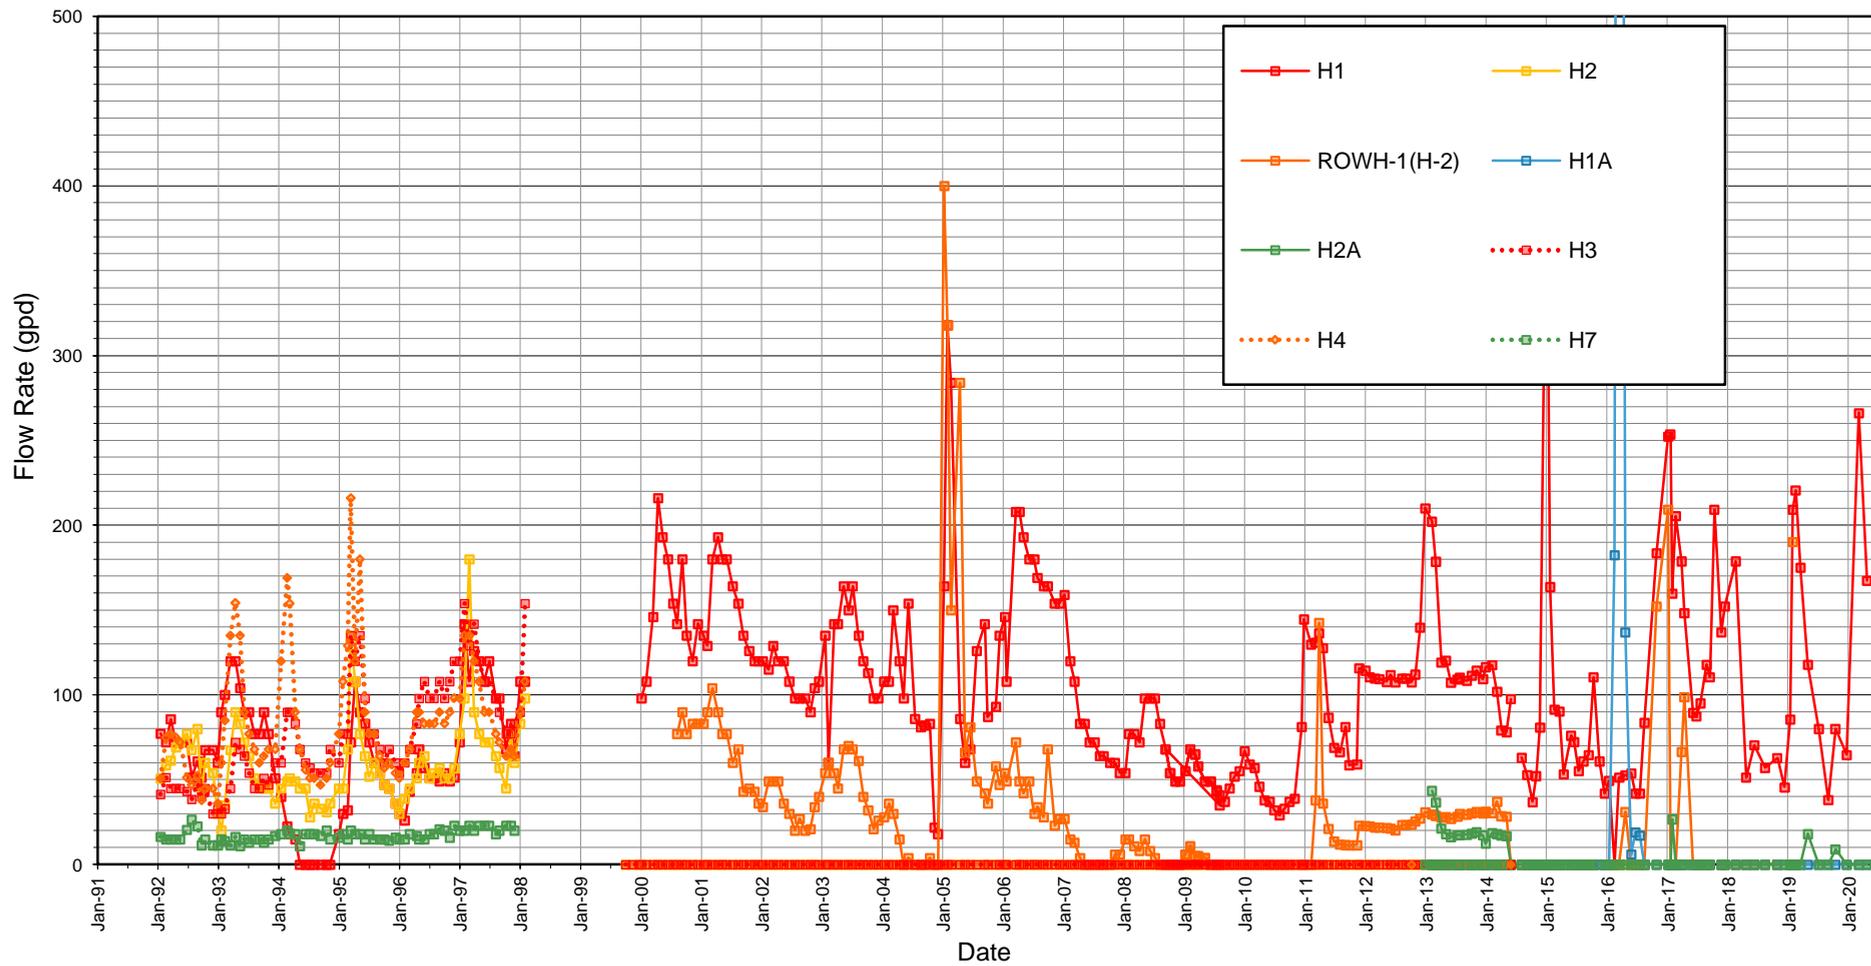

HYDRAUGER DISCHARGE RATE GRAPH
Rambla Orienta
Calle del Barco Landslide Assessment District
Malibu, California

**CALLE DEL BARCO LANDSLIDE ASSESSMENT DISTRICT
FY19-20 ANNUAL REPORT
MALIBU, CALIFORNIA**

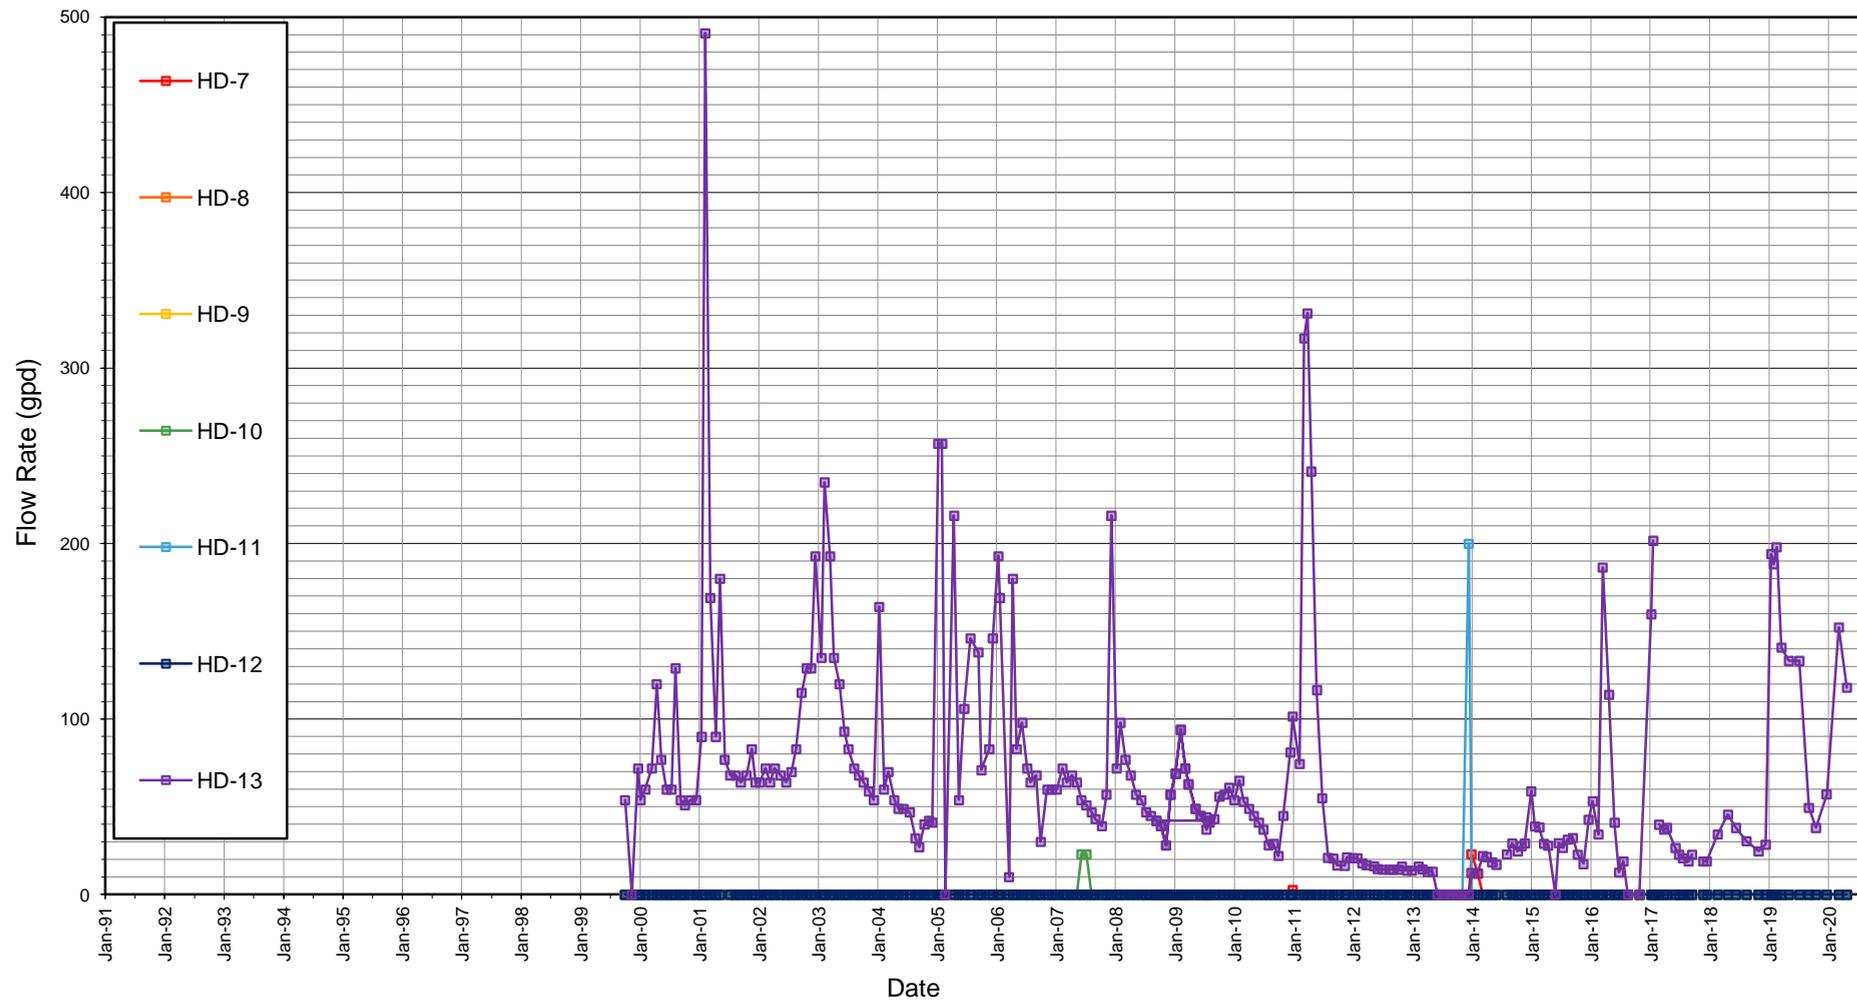

HYDRAUGER DISCHARGE RATE GRAPH
Landslide Toe
Calle del Barco Landslide Assessment District
Malibu, California



**APPENDIX C
SLOPE INCLINOMETER DATA**

Slope Inclinometer Interpretation Summary																	
	SI-1*	SI-1A	SI-2**	SI-3	SI-4	SI-5	SI-6	SI-7	SI-8	SI-9	SI-10	SI-11	SI-12	SI-13	SI-14	SI-15	SI-16
Installation Details																	
Surface Elev. (ft) 4/00	295.0	297.0	298.0	207.0	206.0	302.0	295.0	200.0	335.0	298.0	202.0	291.5	301.0	405.0	398.0	304.0	295.0
Original DEPTH (ft.)	64.0	NI	NI	NI	76.0	100.0	NI	100.0	130.0	100.0	60.0	60.0	60.0	80.0	78.0	76.0	88.0
Current DEPTH (ft.)	64.0	NI	NI	NI	78.0	96.0	NI	102.0	130.0	96.0	62.0	57.0	56.0	78.0	76.0	72.0	86.0
STATUS	D	D	D	D	F	F	D	F	F	F	F	F	F	F	F	F	F
READING INTERVAL	N/A	N/A	N/A	N/A	Semi	Semi	N/A	Semi	Semi	Qrtly	Semi	Semi	Semi	Semi	Semi	Semi	Qrtly
DATE OF INSTALLATION	NI	NI	NI	NI	NI	NI	NI	NI	NI	NI	3/13/98	3/12/98	3/12/98	9/1998	9/1998	9/1998	8/8/03
DATE FIRST BASE READING	NI	NI	NI	NI	NI	NI	NI	NI	NI	12/22/97	3/16/98	3/13/98	3/16/98	10/12/98	10/12/98	10/23/98	8/13/03
DEPTH of MOVEMENT (ft)***	NI	NI	NI	NI	17-22	0-10, 36-38	15.0	40.0	15-17	53, 44	35-38	0-55	54	0-30	8.0	0-25, 77	46, 87
A+ Axis orientation	NI	NI	NI	NI	0	38.0	NI	28.0	22.0	212.0	244.0	258.0	238.0	210.0	224.0	190.0	210 est.
Interpretation Movement (inches)																	
2019-2020	NR	NR	NR	NR	--	--	NR	--	0.1	--	--	--	--	--	--	--	--
2018-2019	NR	NR	NR	NR	0.1	--	NR	--	--	0.2	--	--	--	--	--	--	--
2017-2018	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	--
2016-2017	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	<0.1
2015-2016	NR	NR	NR	NR	--	<0.05	NR	--	--	0.2	--	--	--	--	--	--	--
2014-2015	NR	NR	NR	NR	--	0.1	NR	--	--	--	--	--	--	--	--	--	<0.1
2013-2014	NR	NR	NR	NR	--	0.1	NR	--	--	--	--	--	--	--	--	--	<0.1
2012-2013	NR	NR	NR	NR	--	0.1	NR	--	--	0.15	0.1	--	0.1	--	--	--	0.2
2011-2012	NR	NR	NR	NR	--	--	NR	<0.05	0.1	0.15	--	0.2	--	--	--	0.1	0.35
2010-2011	NR	NR	NR	NR	--	--	NR	<0.05	0.05	<0.05	--	--	--	--	--	--	--
2009-2010	NR	NR	NR	NR	--	--	NR	--	--	0.2	--	0.1	--	--	--	--	0.1
2008-2009	NR	NR	NR	NR	--	--	NR	NA	--	0.1	--	--	--	--	--	--	--
2007-2008	NR	NR	NR	NR	--	--	NR	--	--	0.1	--	--	--	--	--	--	--
2006-2007	NR	NR	NR	NR	--	<0.1	NR	--	--	0.2	--	--	--	--	0.2	--	0.2
2005-2006	NR	NR	NR	NR	--	--	NR	--	--	0.1	--	--	<0.1	--	0.15	--	0.1
2004-2005	NR	NR	NR	NR	--	0.45	NR	<0.1	0.1	0.5	--	<0.1	0.11	--	--	--	0.35
2003-2004	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	--
2002-2003	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	--
2001-2002	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	--
2000-2001	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	--
1999-2000	NR	NR	NR	NR	--	--	NR	--	--	--	--	--	--	--	--	--	--
1998-1999	NR	NR	NR	NR	--	0.16	NR	0.11	--	2.19	--	--	--	--	--	--	--
1997-1998	NR	NR	NR	NR	0.22	0.4	NR	0.66	0.32	13	0.22	--	--	NR	NR	NR	NR
1995-1997	NR	NR	NR	NR	NA	NA	NR	NA	NA	NR	NR	NR	NR	NR	NR	NR	NR


KEY:	
D	Destroyed
F	Functioning
B	New baseline in 1999
NI	No information
--	Shaded yellow to indicate inclinometer does penetrate basal rupture.
--	Shaded blue to indicate inclinometer does NOT penetrate basal rupture.
--	Shaded gray to indicate inclinometer is no longer monitored.
--	No clearly defined interpreted movement
NR	No reading
NA	Data not available

NOTES:
 * Original SI-1 installed in 1978, and was destroyed.
 SI-65 (installed in 1979) was renamed to SI-1
 ** Original SI-2 installed in 1978, and was destroyed.
 SI-90 (installed in 1979) was renamed to SI-2

*** Referenced to current depth of SI (see note below)
 **** SI-4, SI-7, and SI-10 were extended 6 feet upwards during reconstruction of the road in 1999 and interpretations are referenced to their current depth.

SUMMARY OF SLOPE INCLINOMETERS
 Calle del Barco Landslide Assessment District
 Malibu, California


Fugro West, Inc. - Ventura, CA

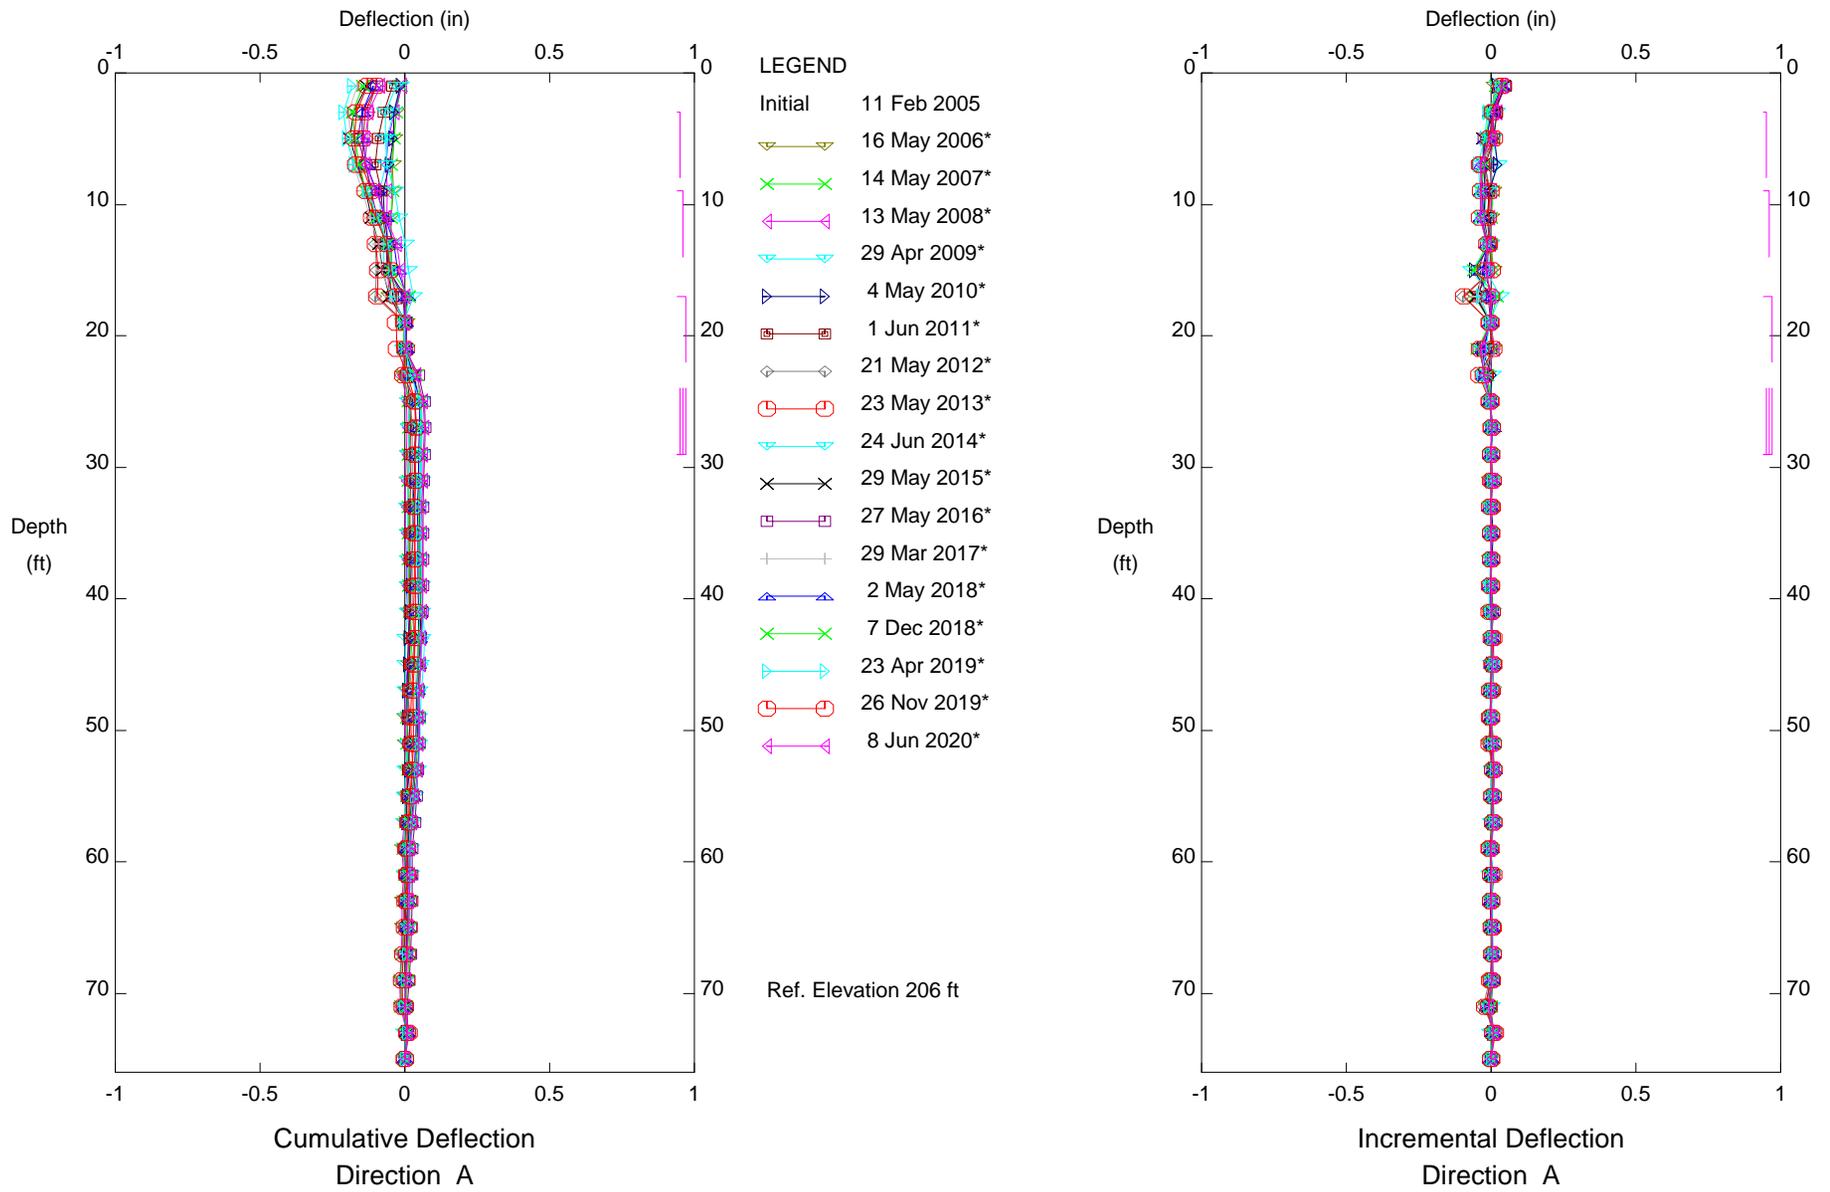

Assessment District 98-2, Inclinator SI-4
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

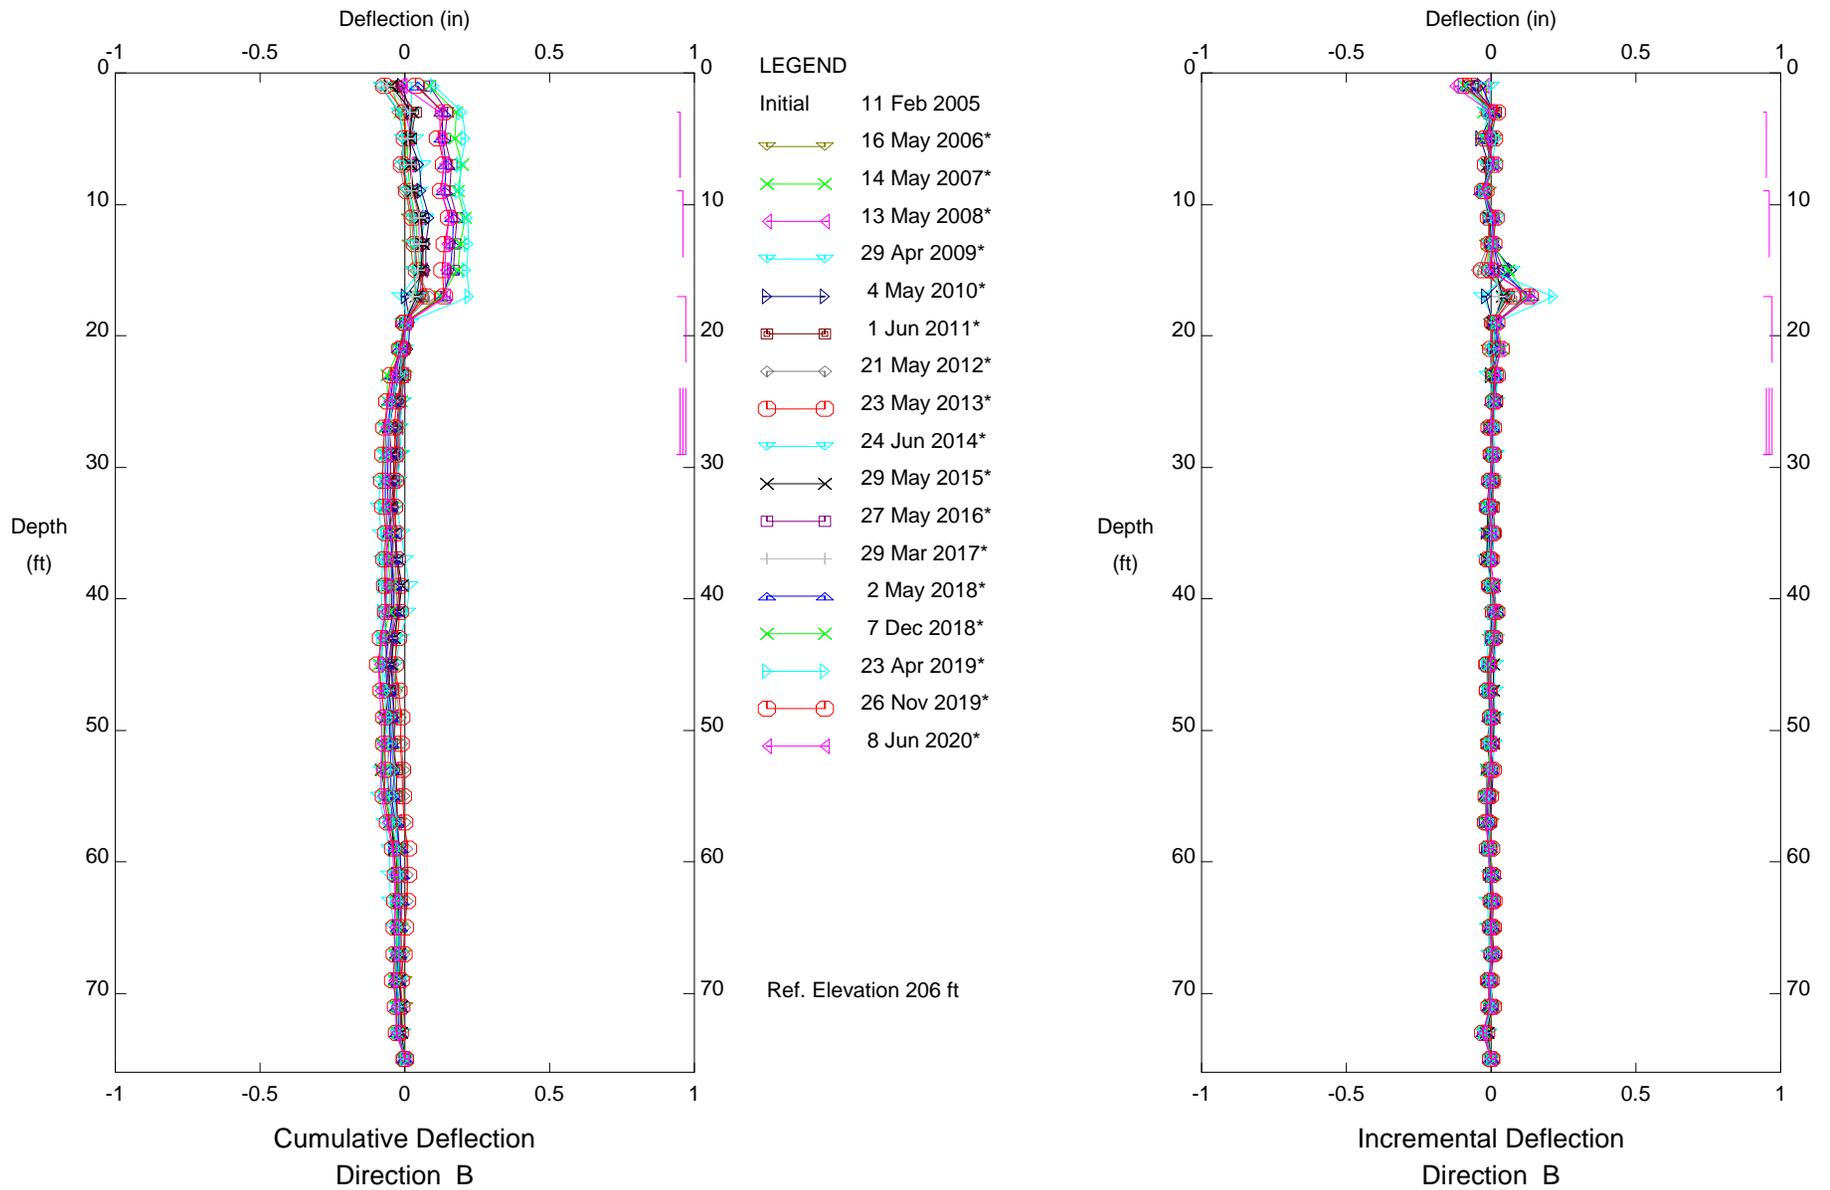

Assessment District 98-2, Inclinometer SI-4
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

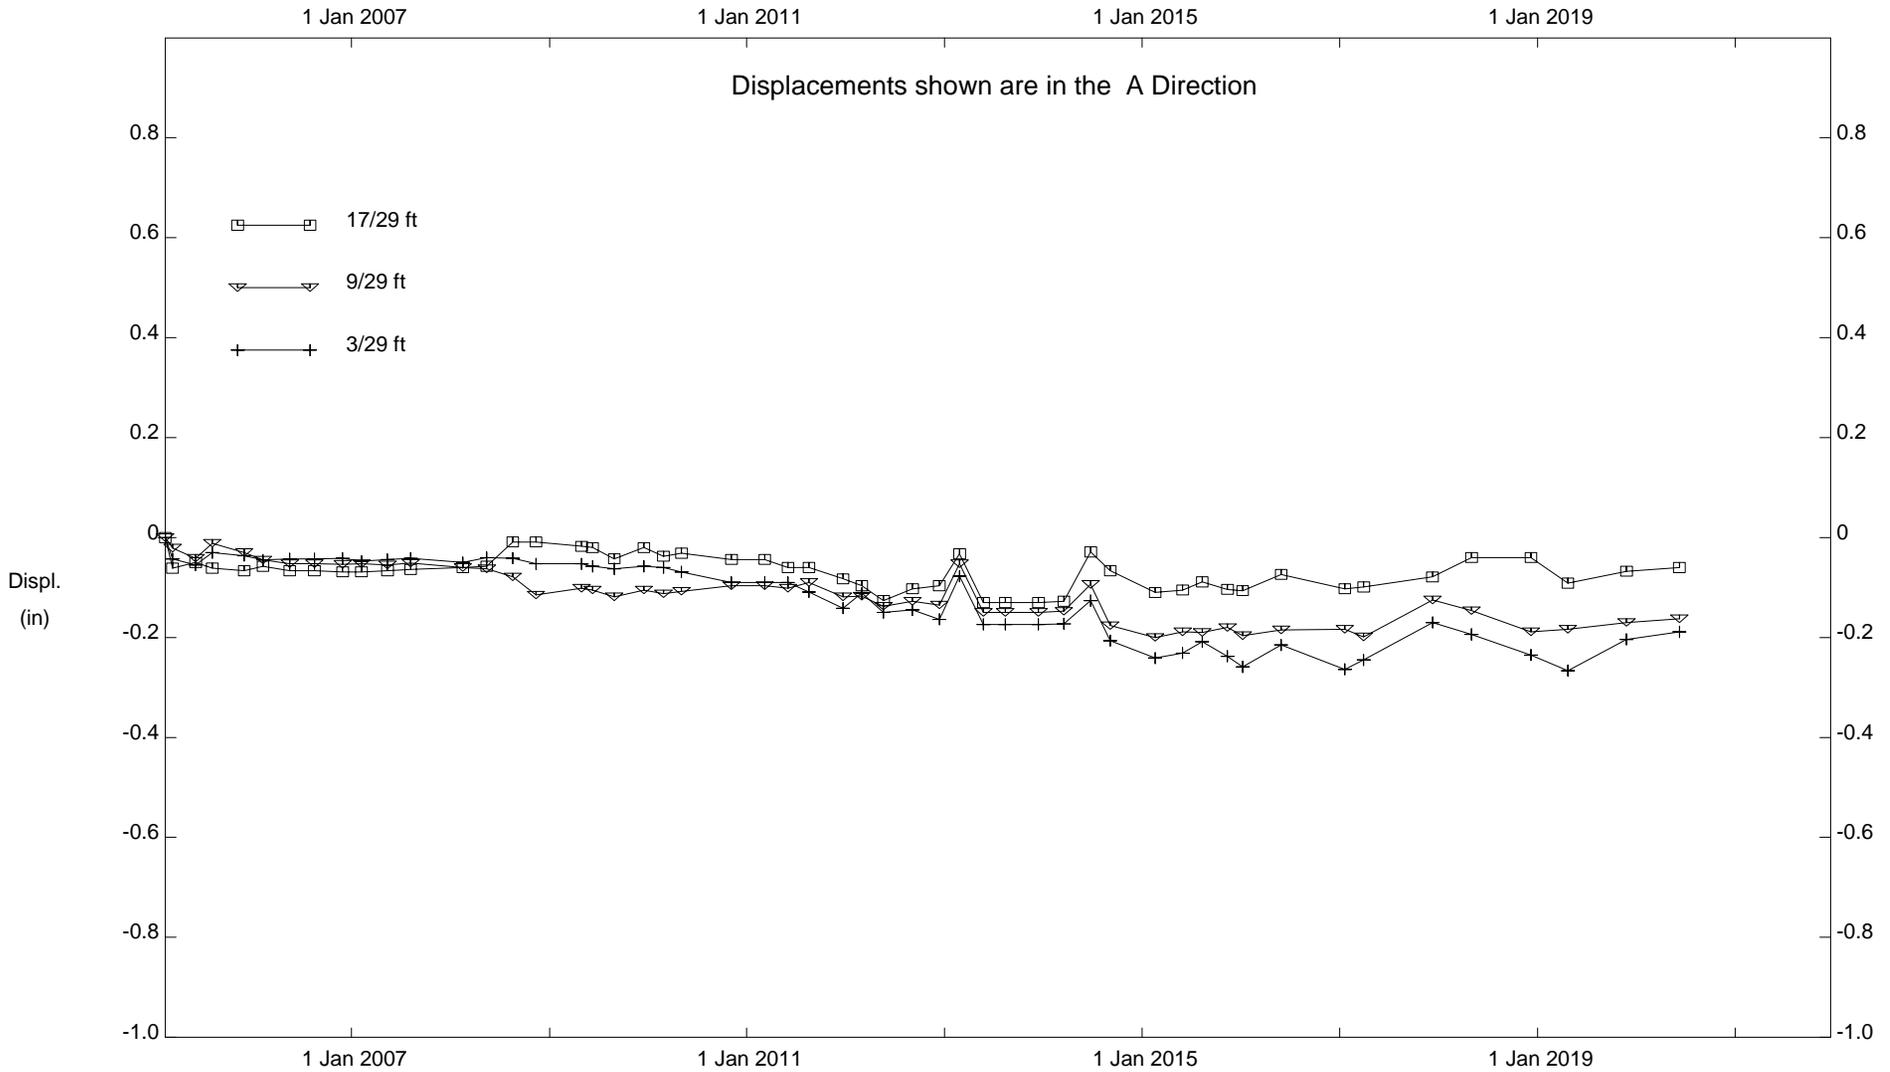

Assessment District 98-2, Inclinometer SI-4

City of Malibu


Fugro West, Inc. - Ventura, CA

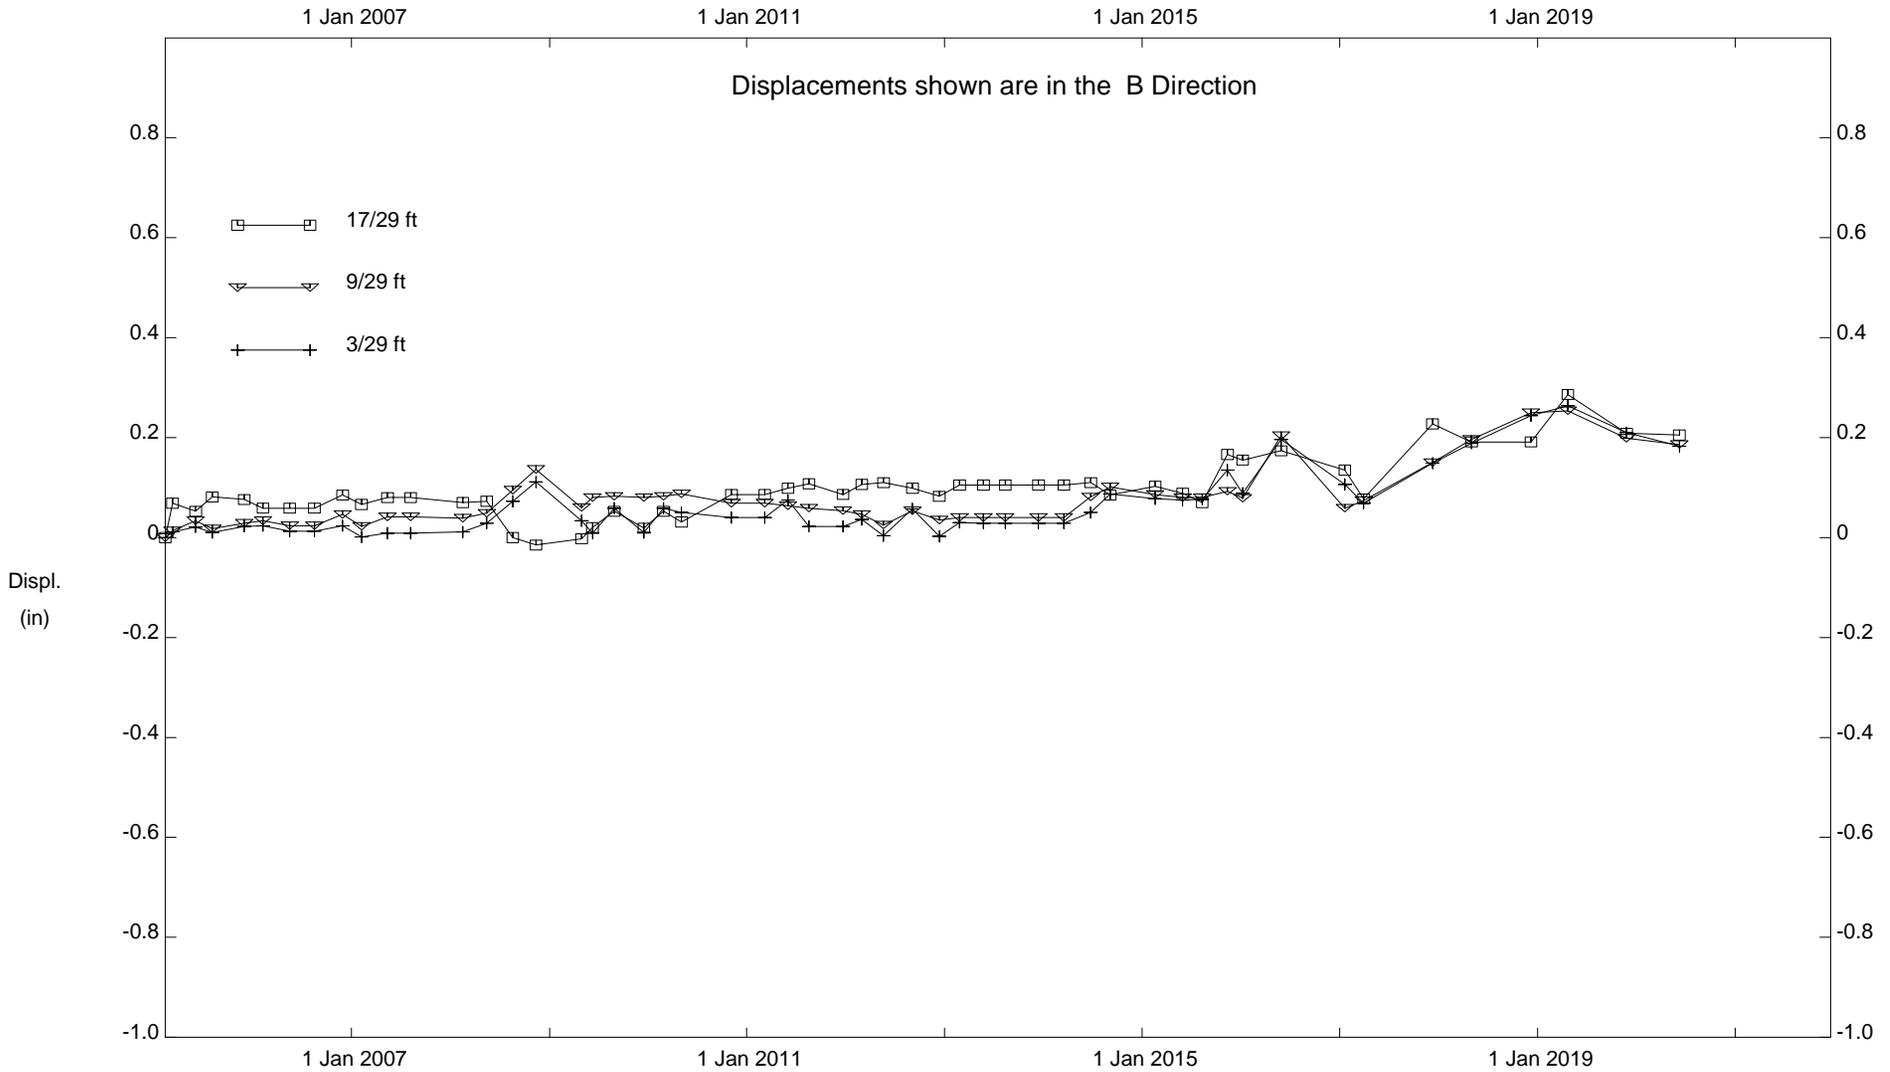

Assessment District 98-2, Inclinator SI-4

City of Malibu


Fugro West, Inc. - Ventura, CA

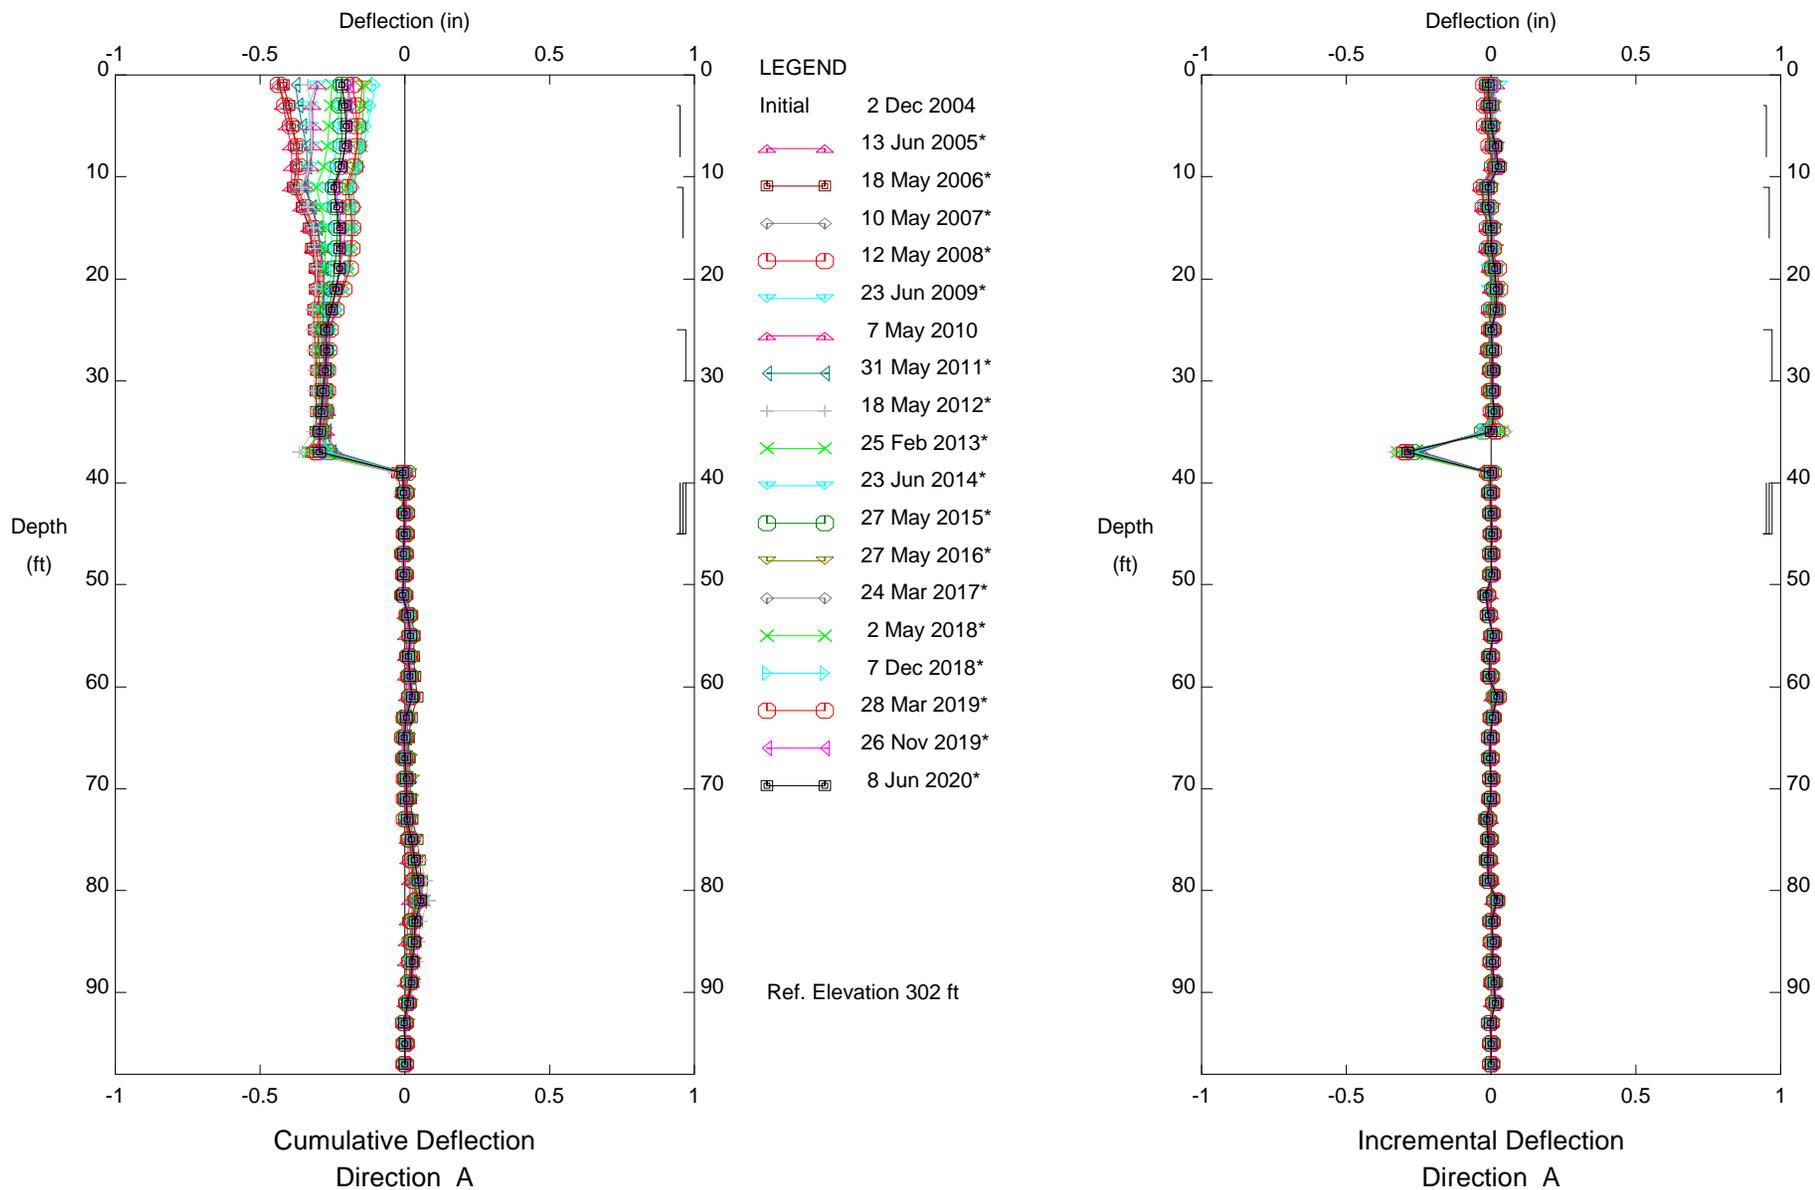

Assessment District 98-2, Inclinometer SI-5
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

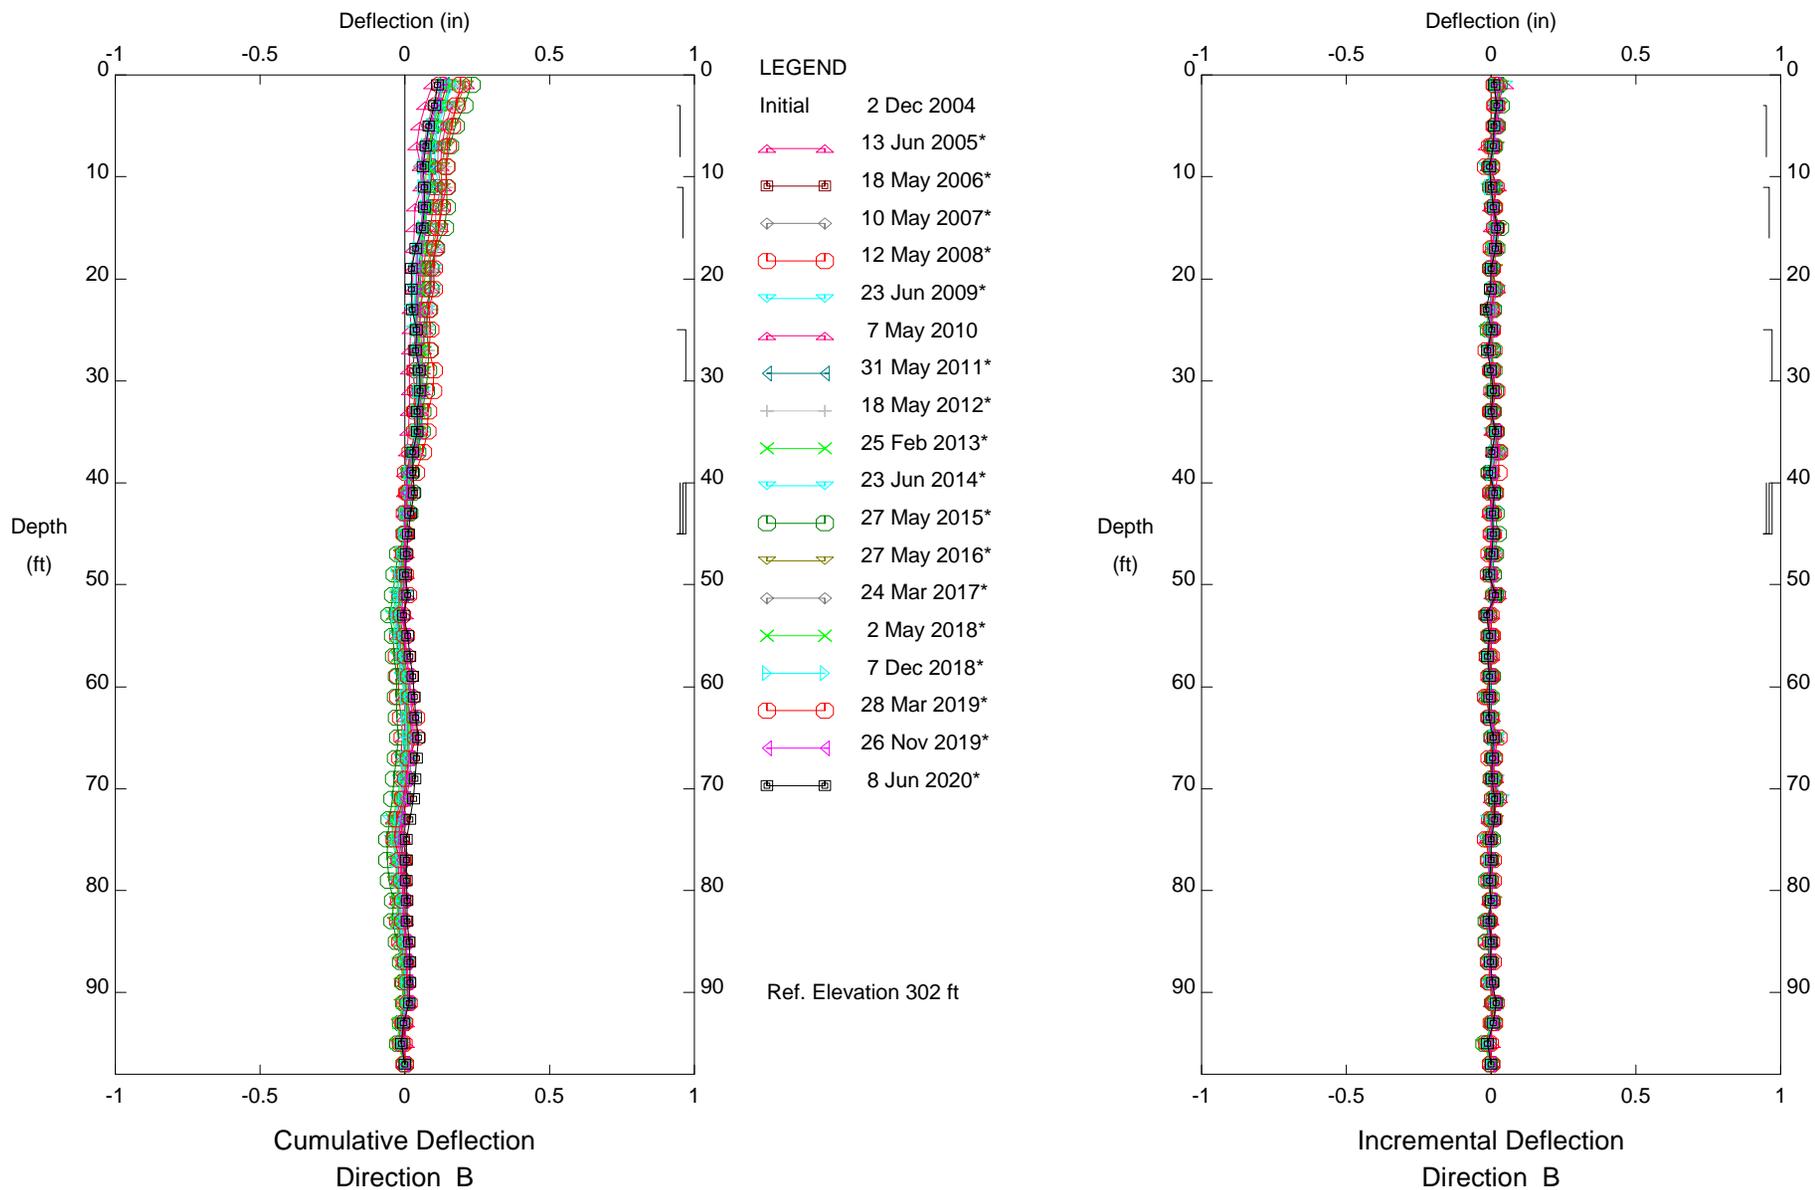

Assessment District 98-2, Inclinator SI-5
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

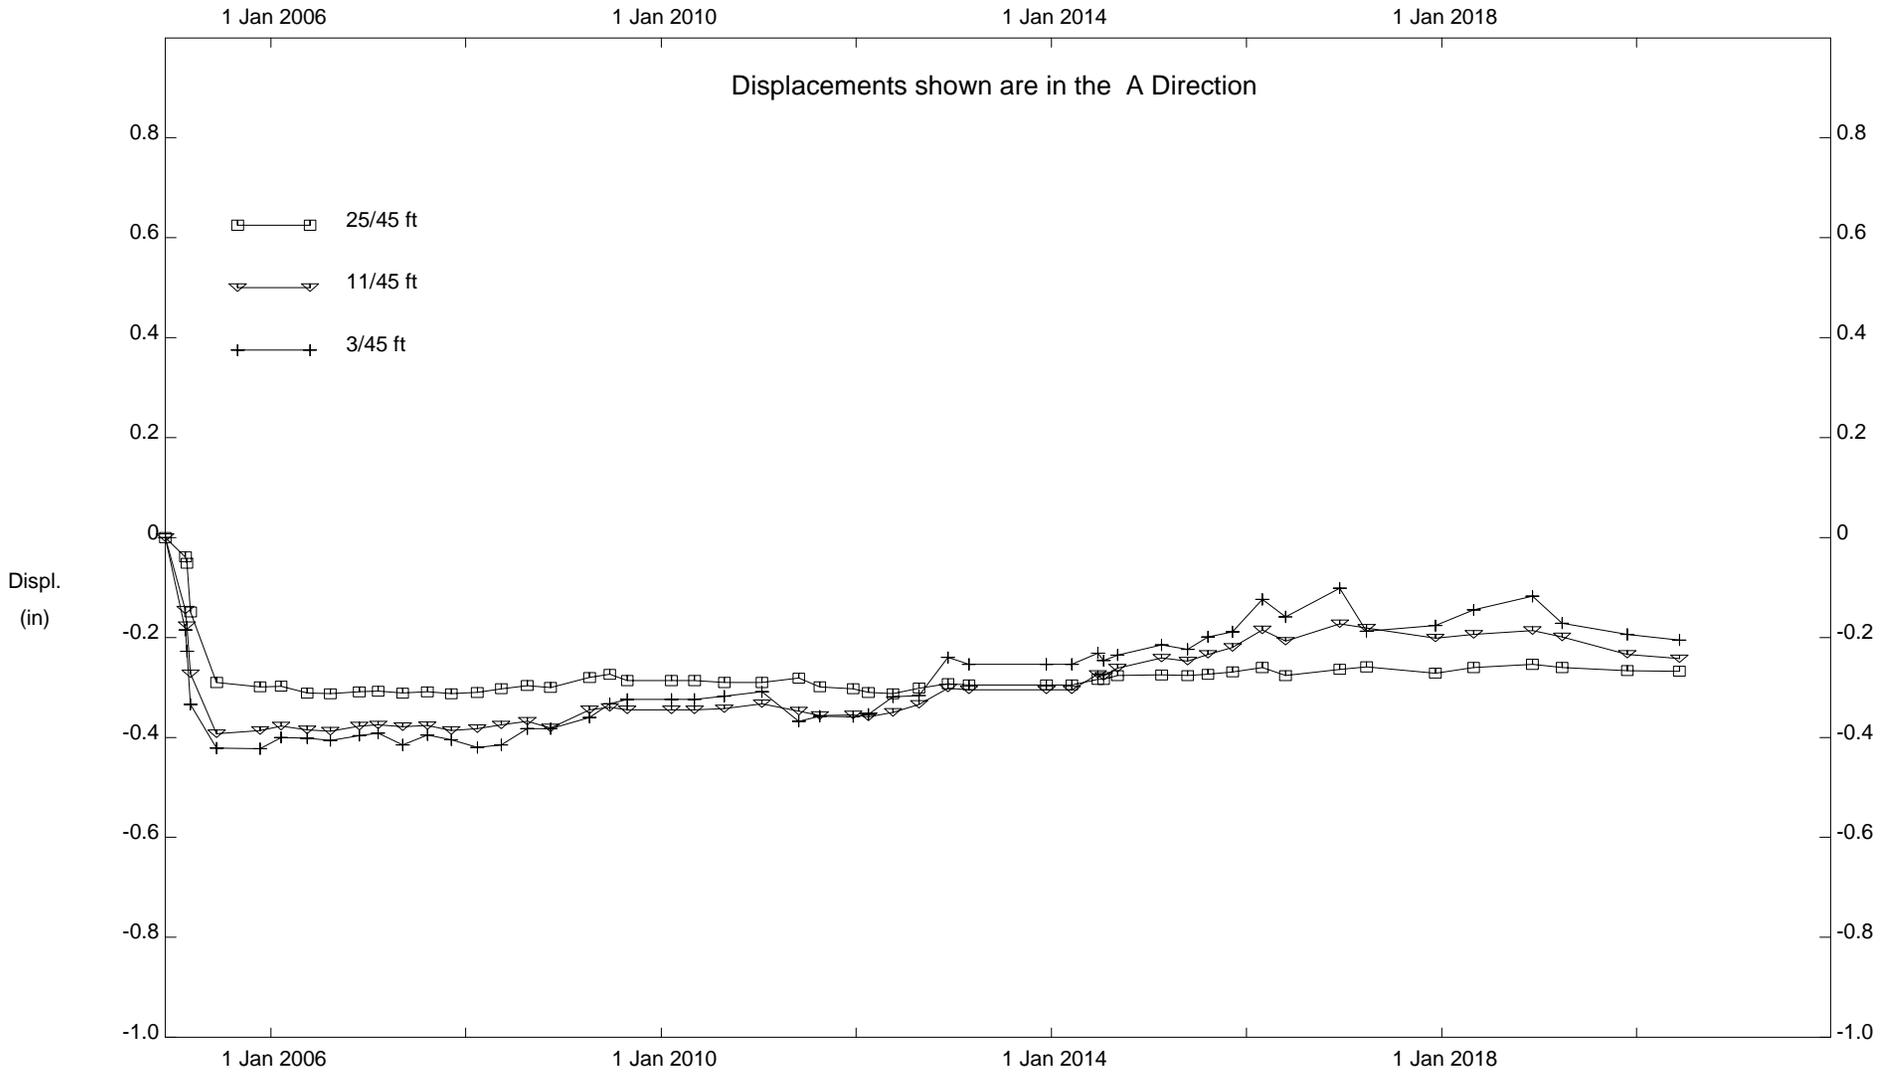

Assessment District 98-2, Inclinator SI-5

City of Malibu


Fugro West, Inc. - Ventura, CA

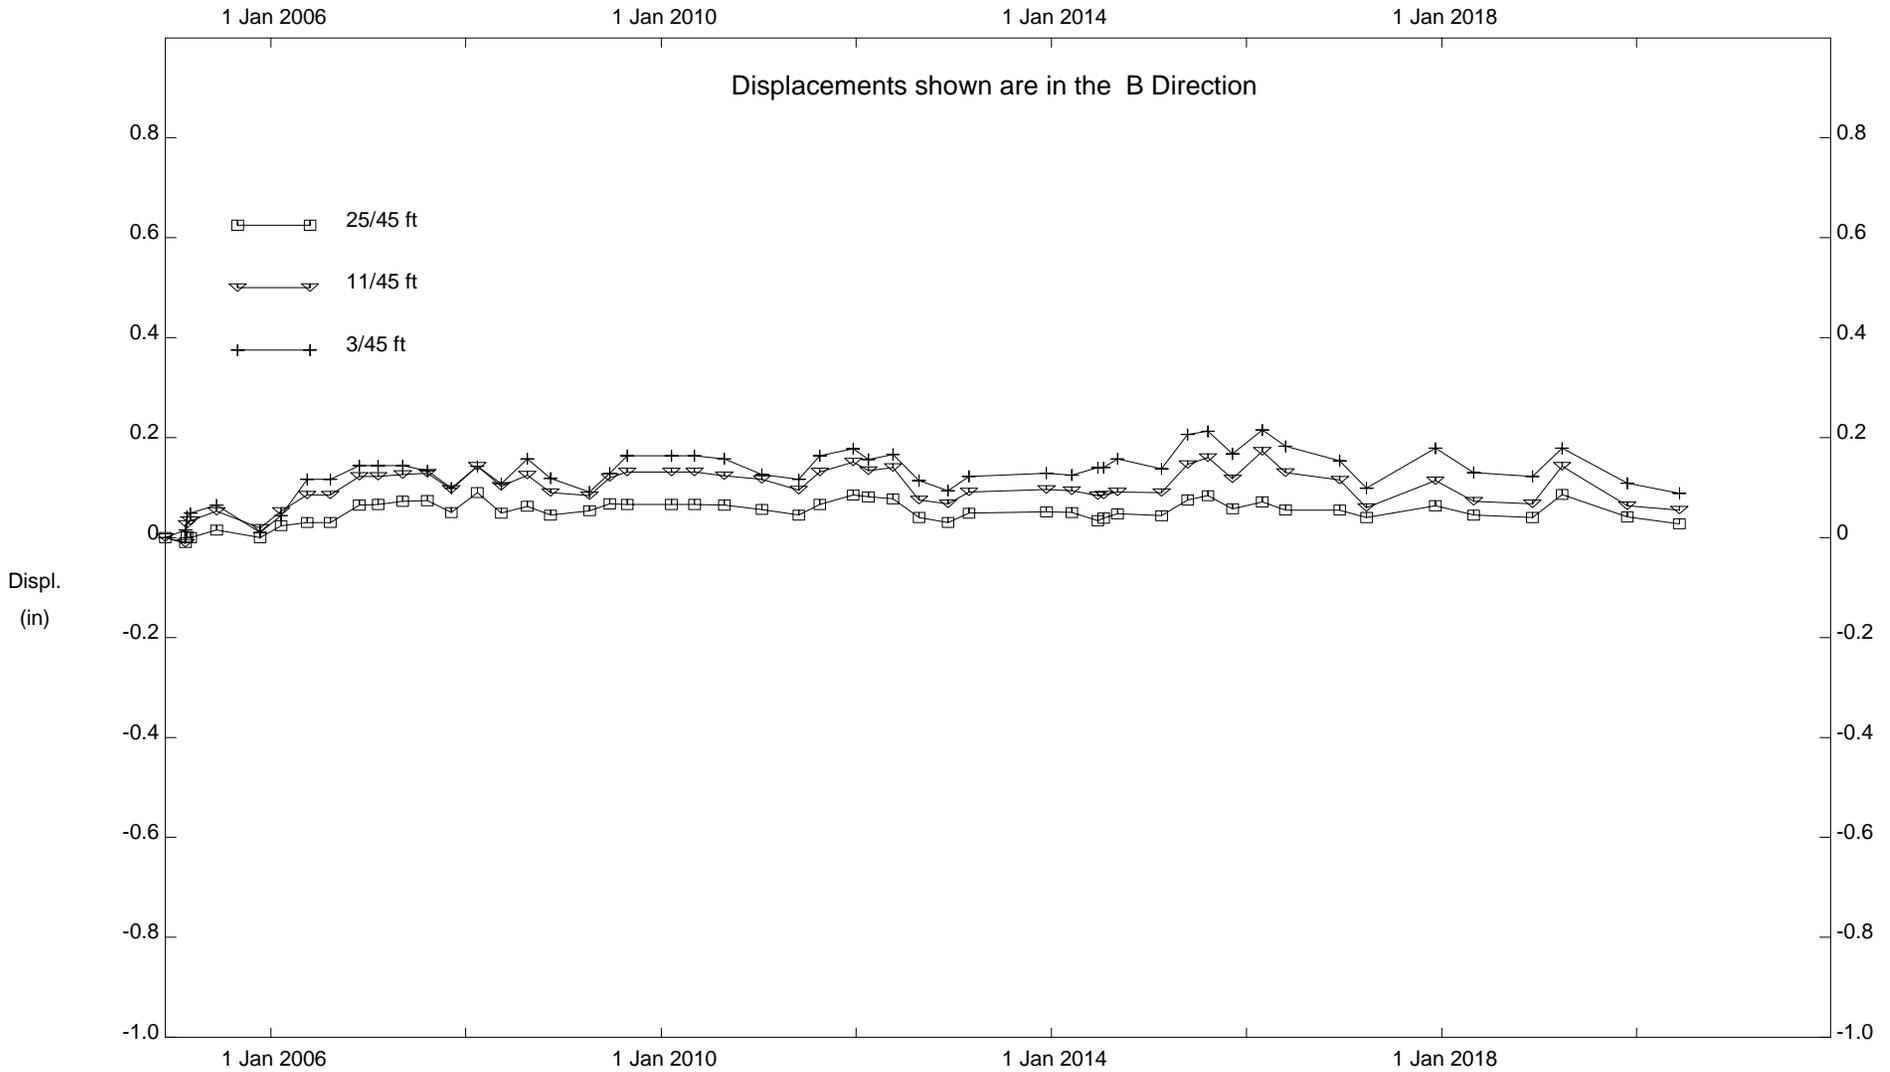

Assessment District 98-2, Inclinator SI-5

City of Malibu


Fugro West, Inc. - Ventura, CA

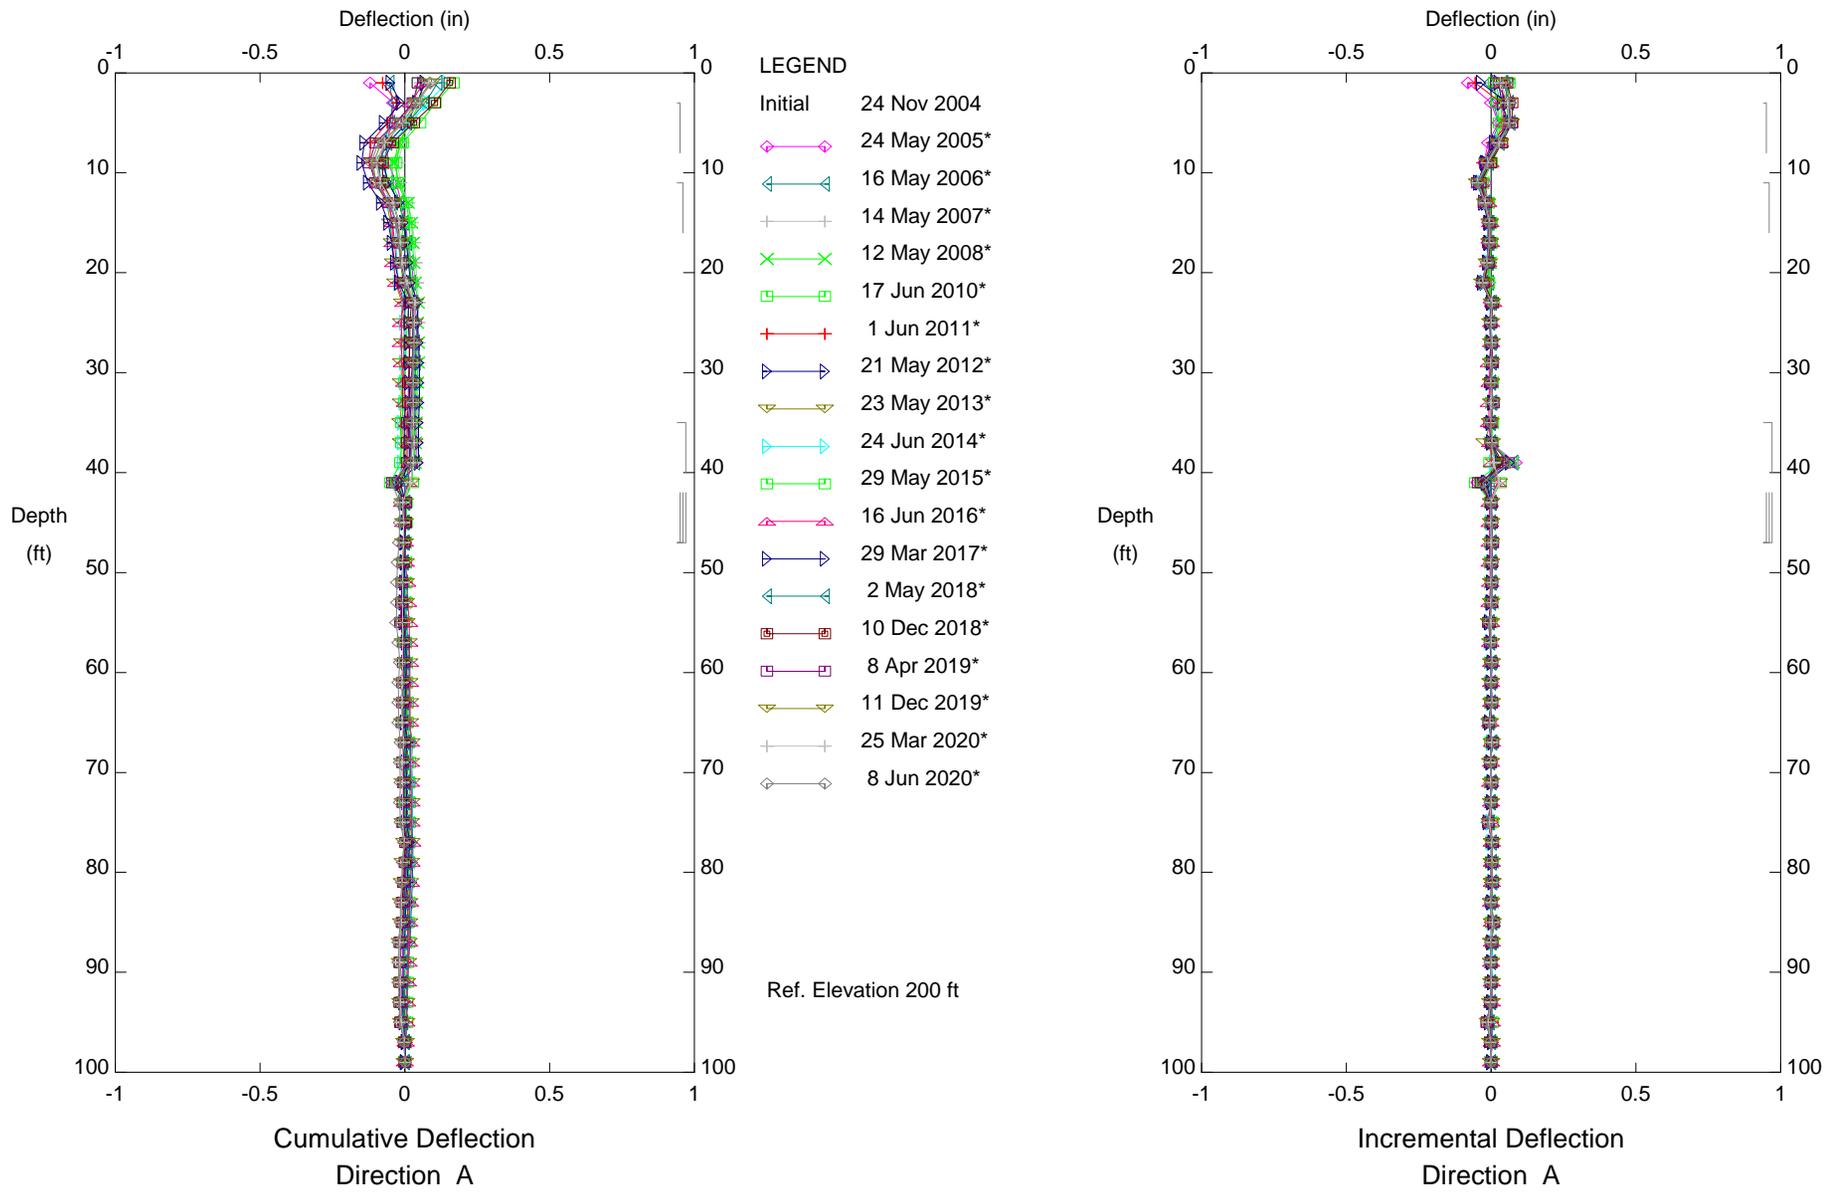

Calle del Barco, Inclinator SI-7
 City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

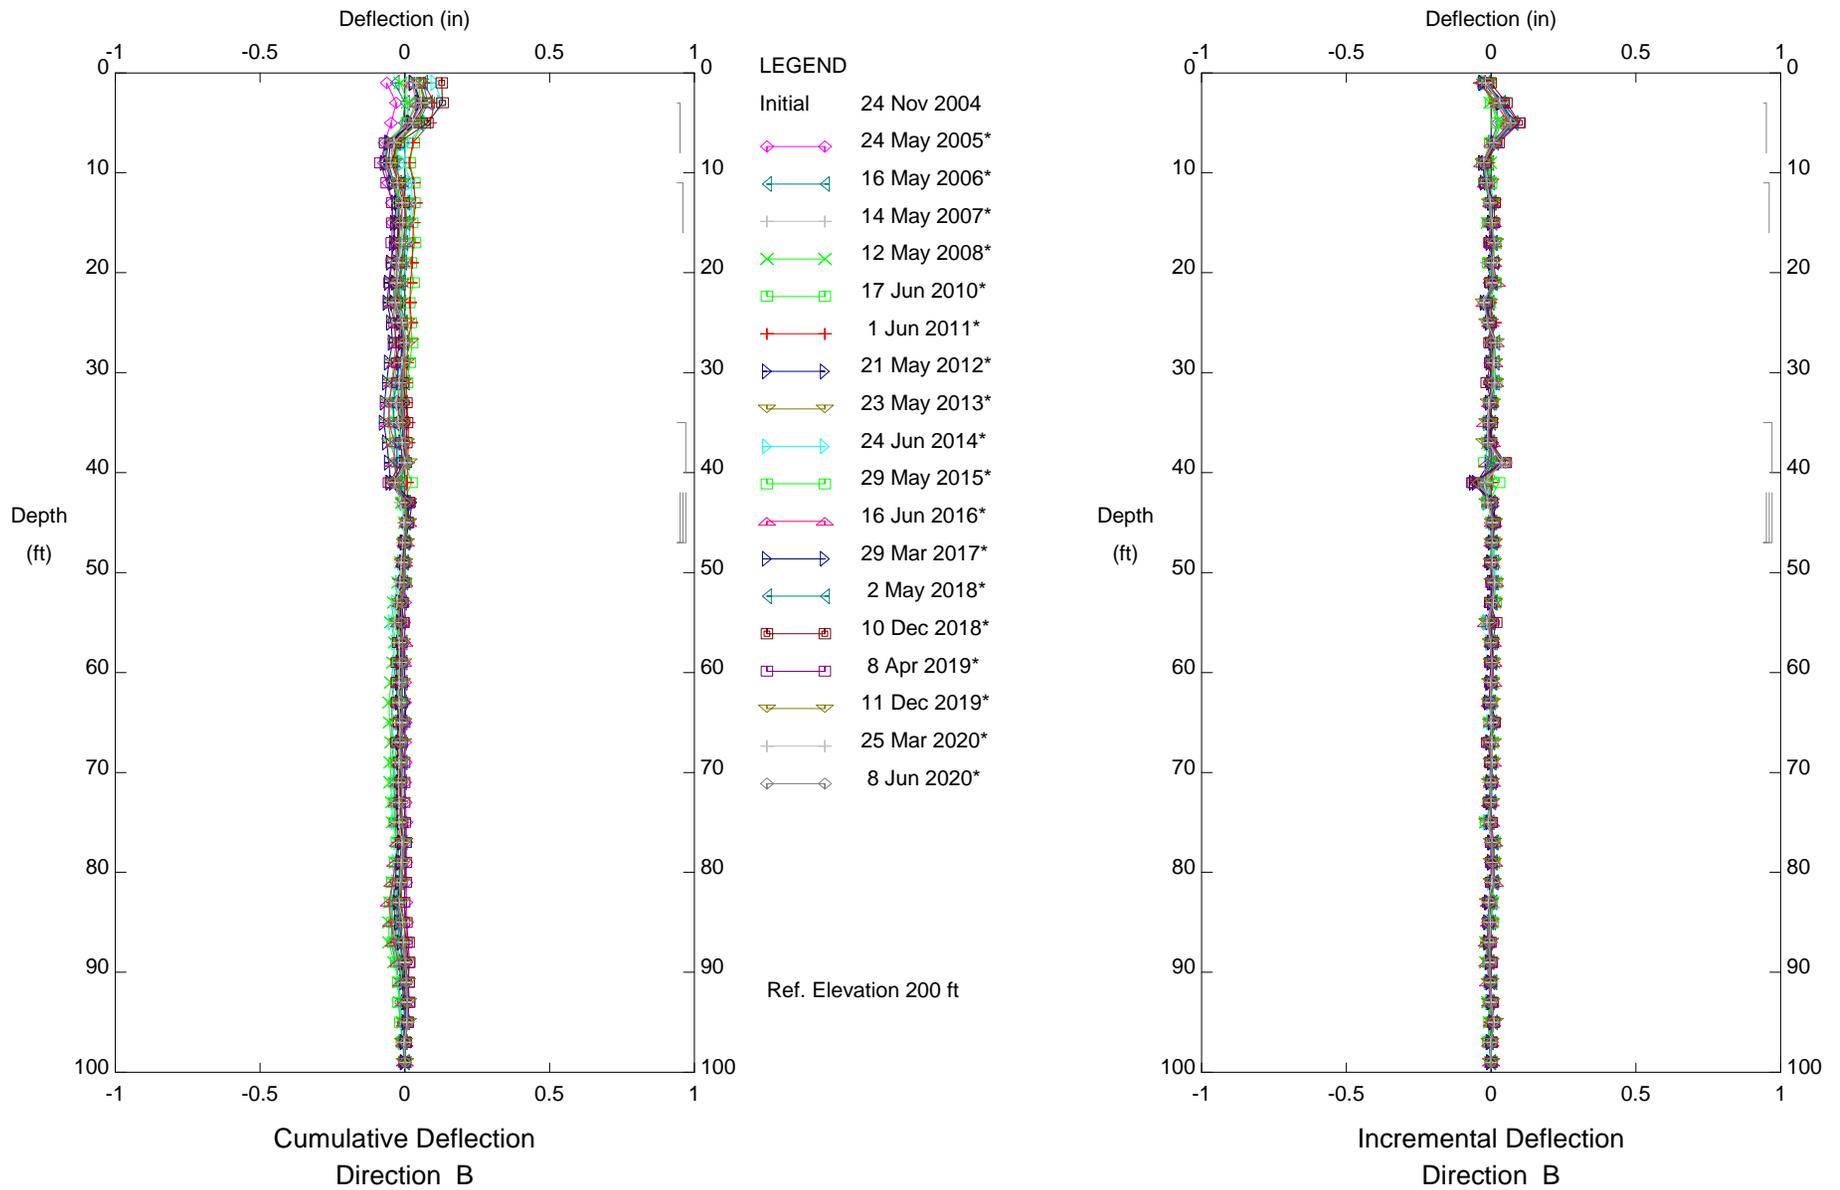

Calle del Barco, Inclinometer SI-7
 City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

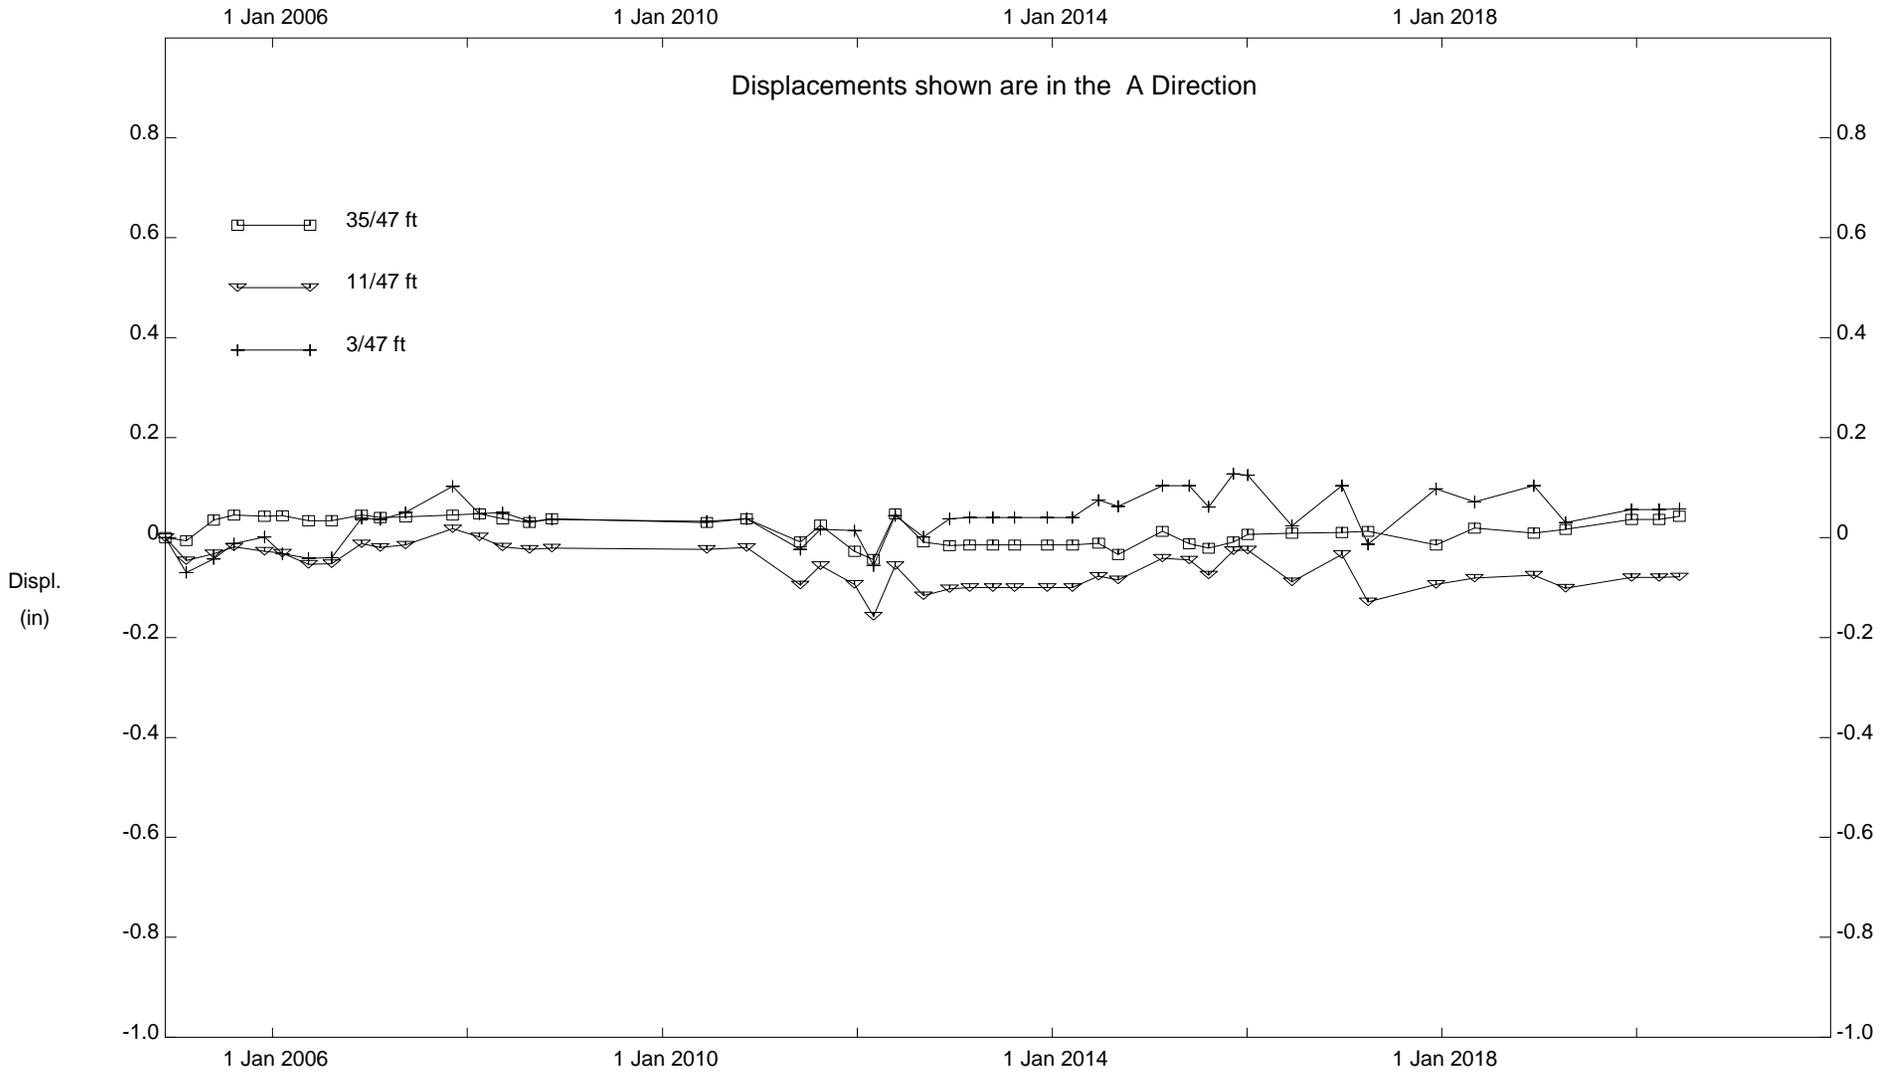

Calle del Barco, Inclinator SI-7

City of Malibu


Fugro West, Inc. - Ventura, CA

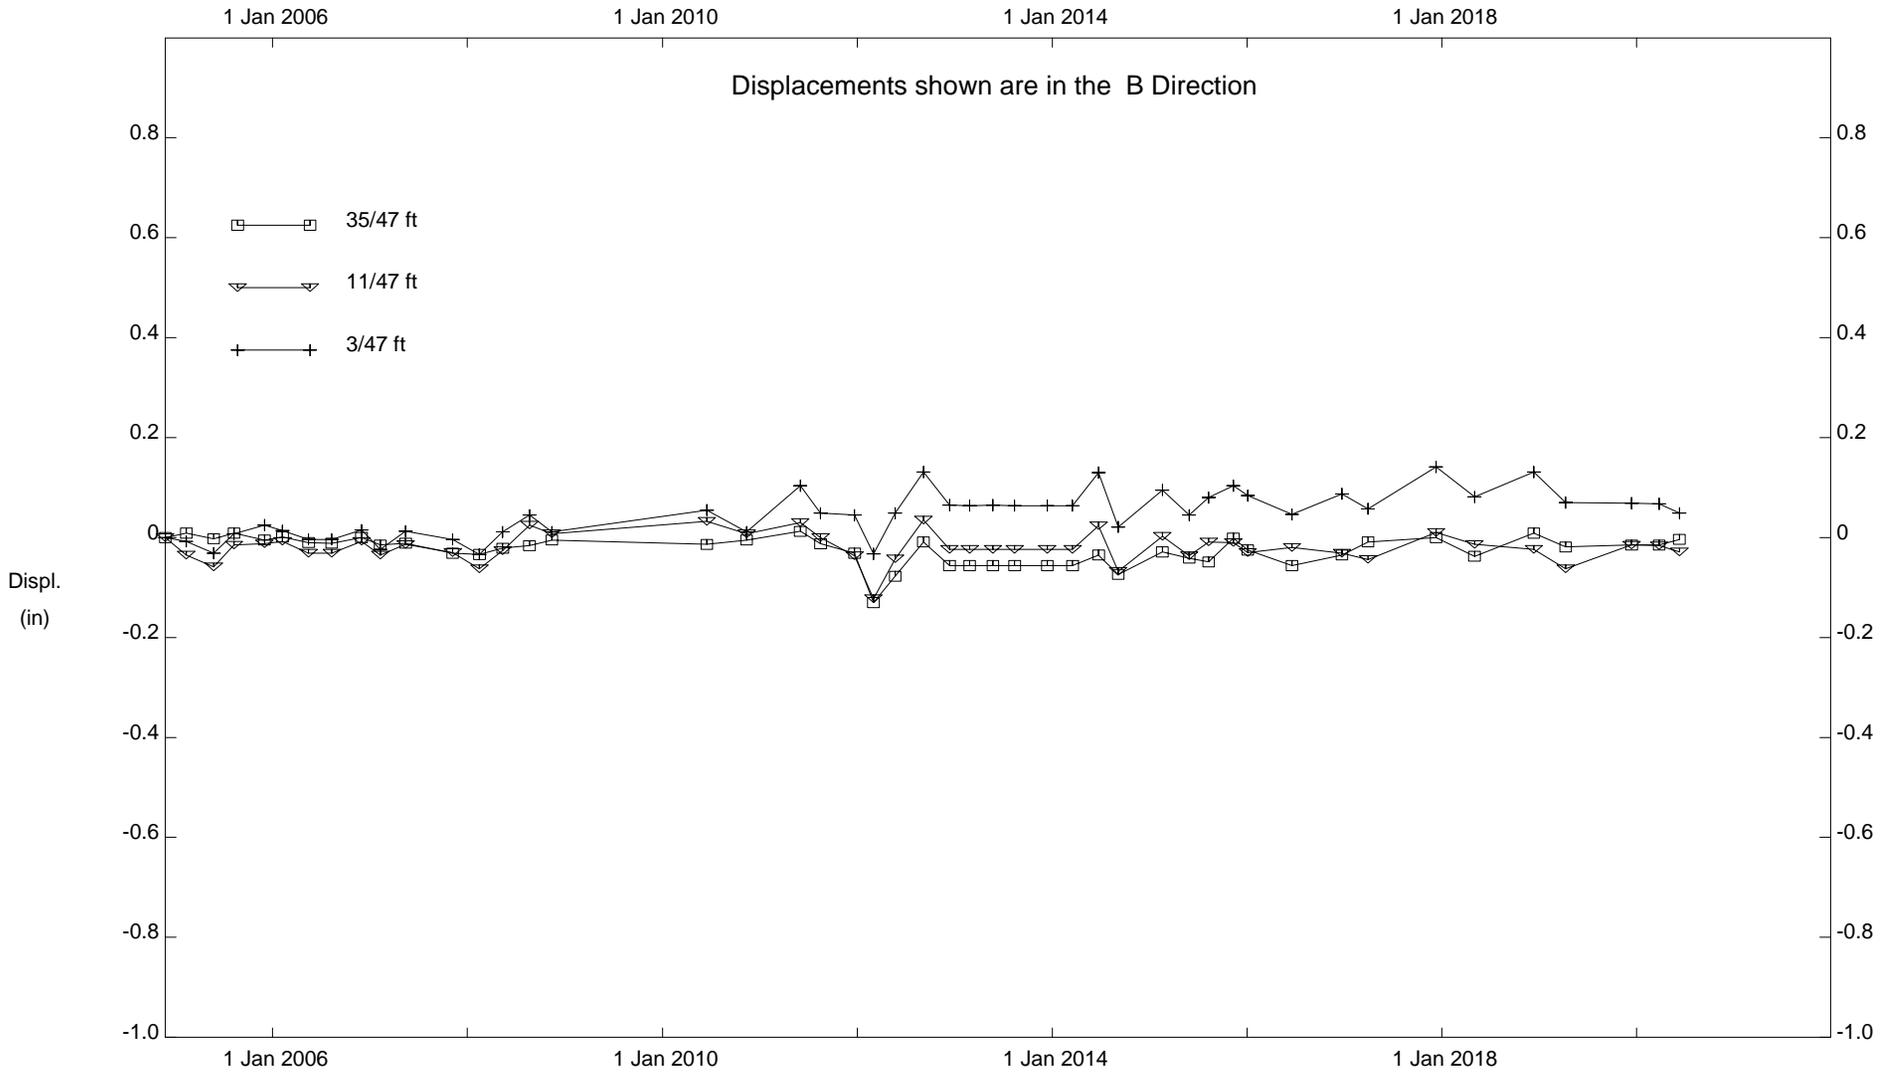

Calle del Barco, Inclinator SI-7

City of Malibu


Fugro West, Inc. - Ventura, CA

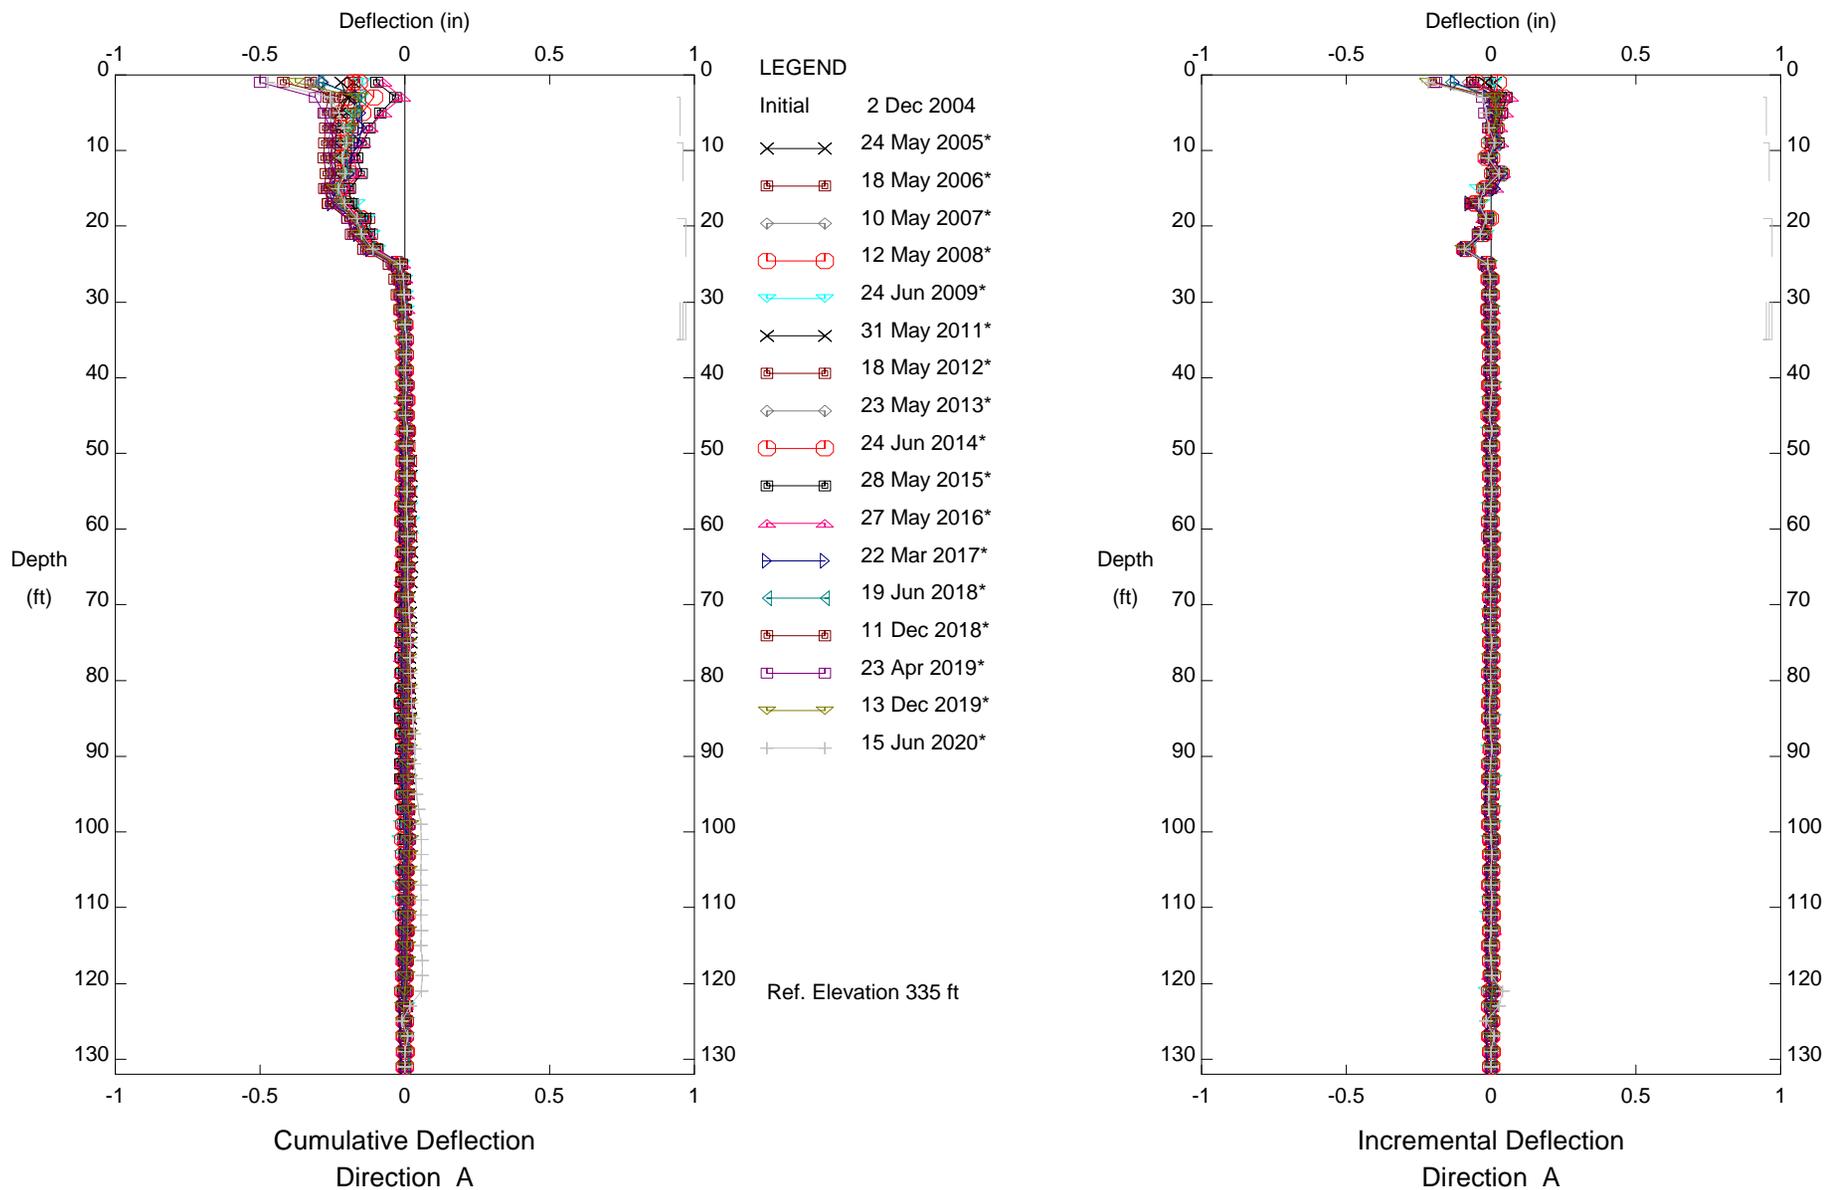

Assessment District 98-2, Inclinator SI-8
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

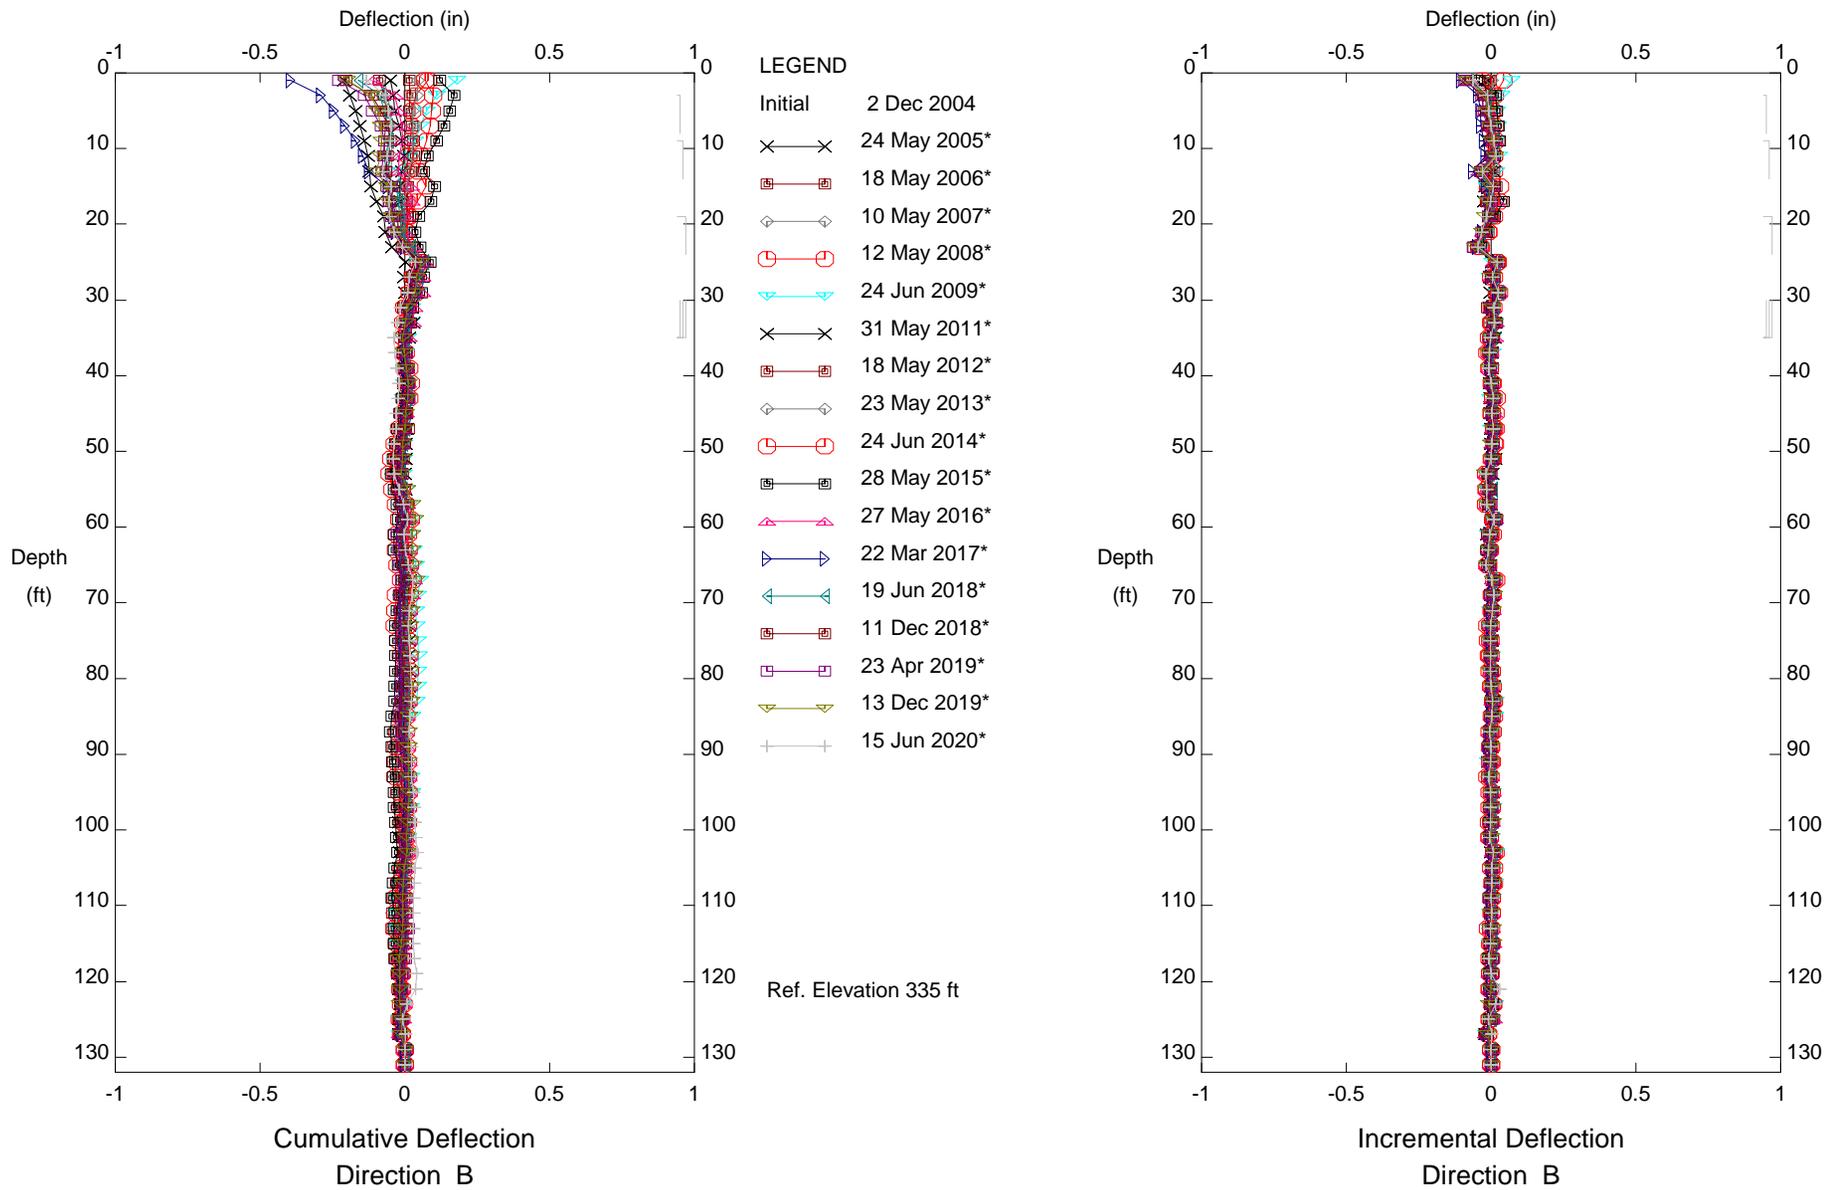

Assessment District 98-2, Inclinator SI-8
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

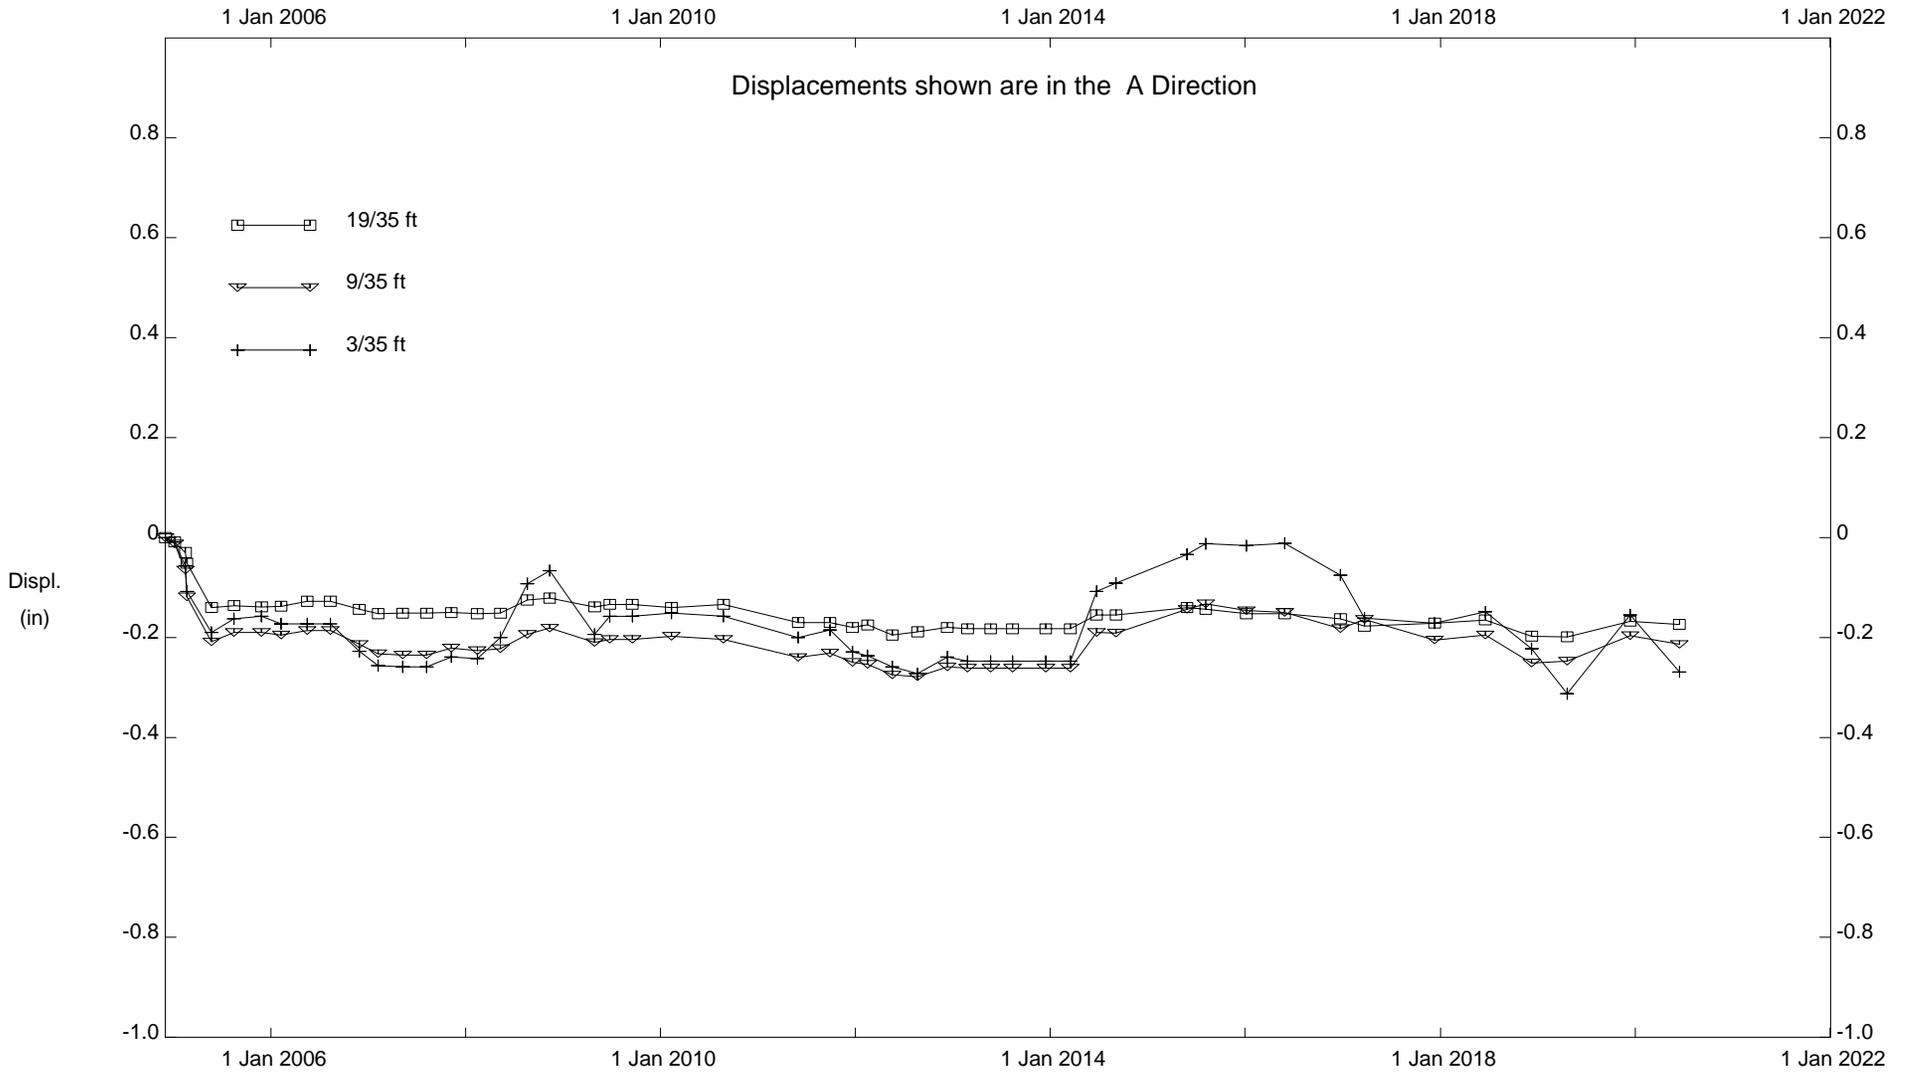

Assessment District 98-2, Inclinator SI-8

City of Malibu


Fugro West, Inc. - Ventura, CA

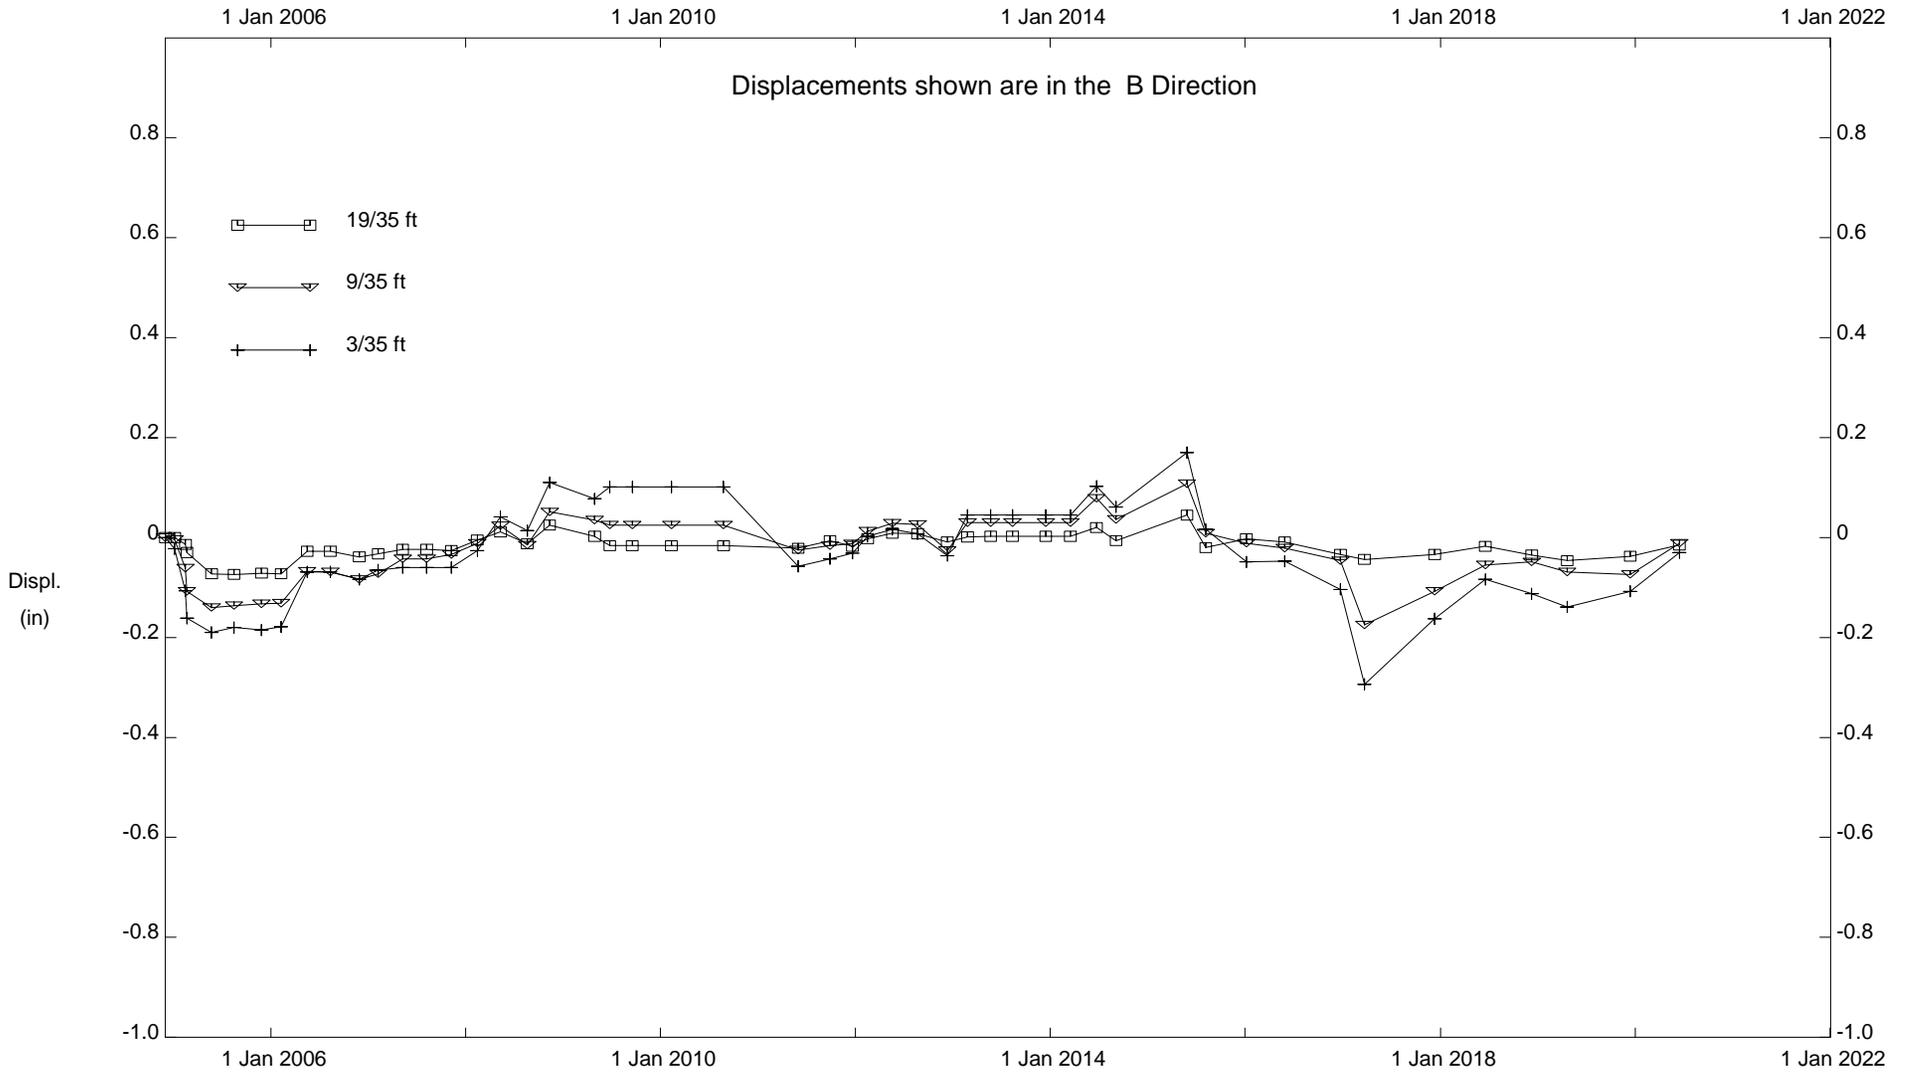

Assessment District 98-2, Inclinator SI-8

City of Malibu


Fugro West, Inc. - Ventura, CA

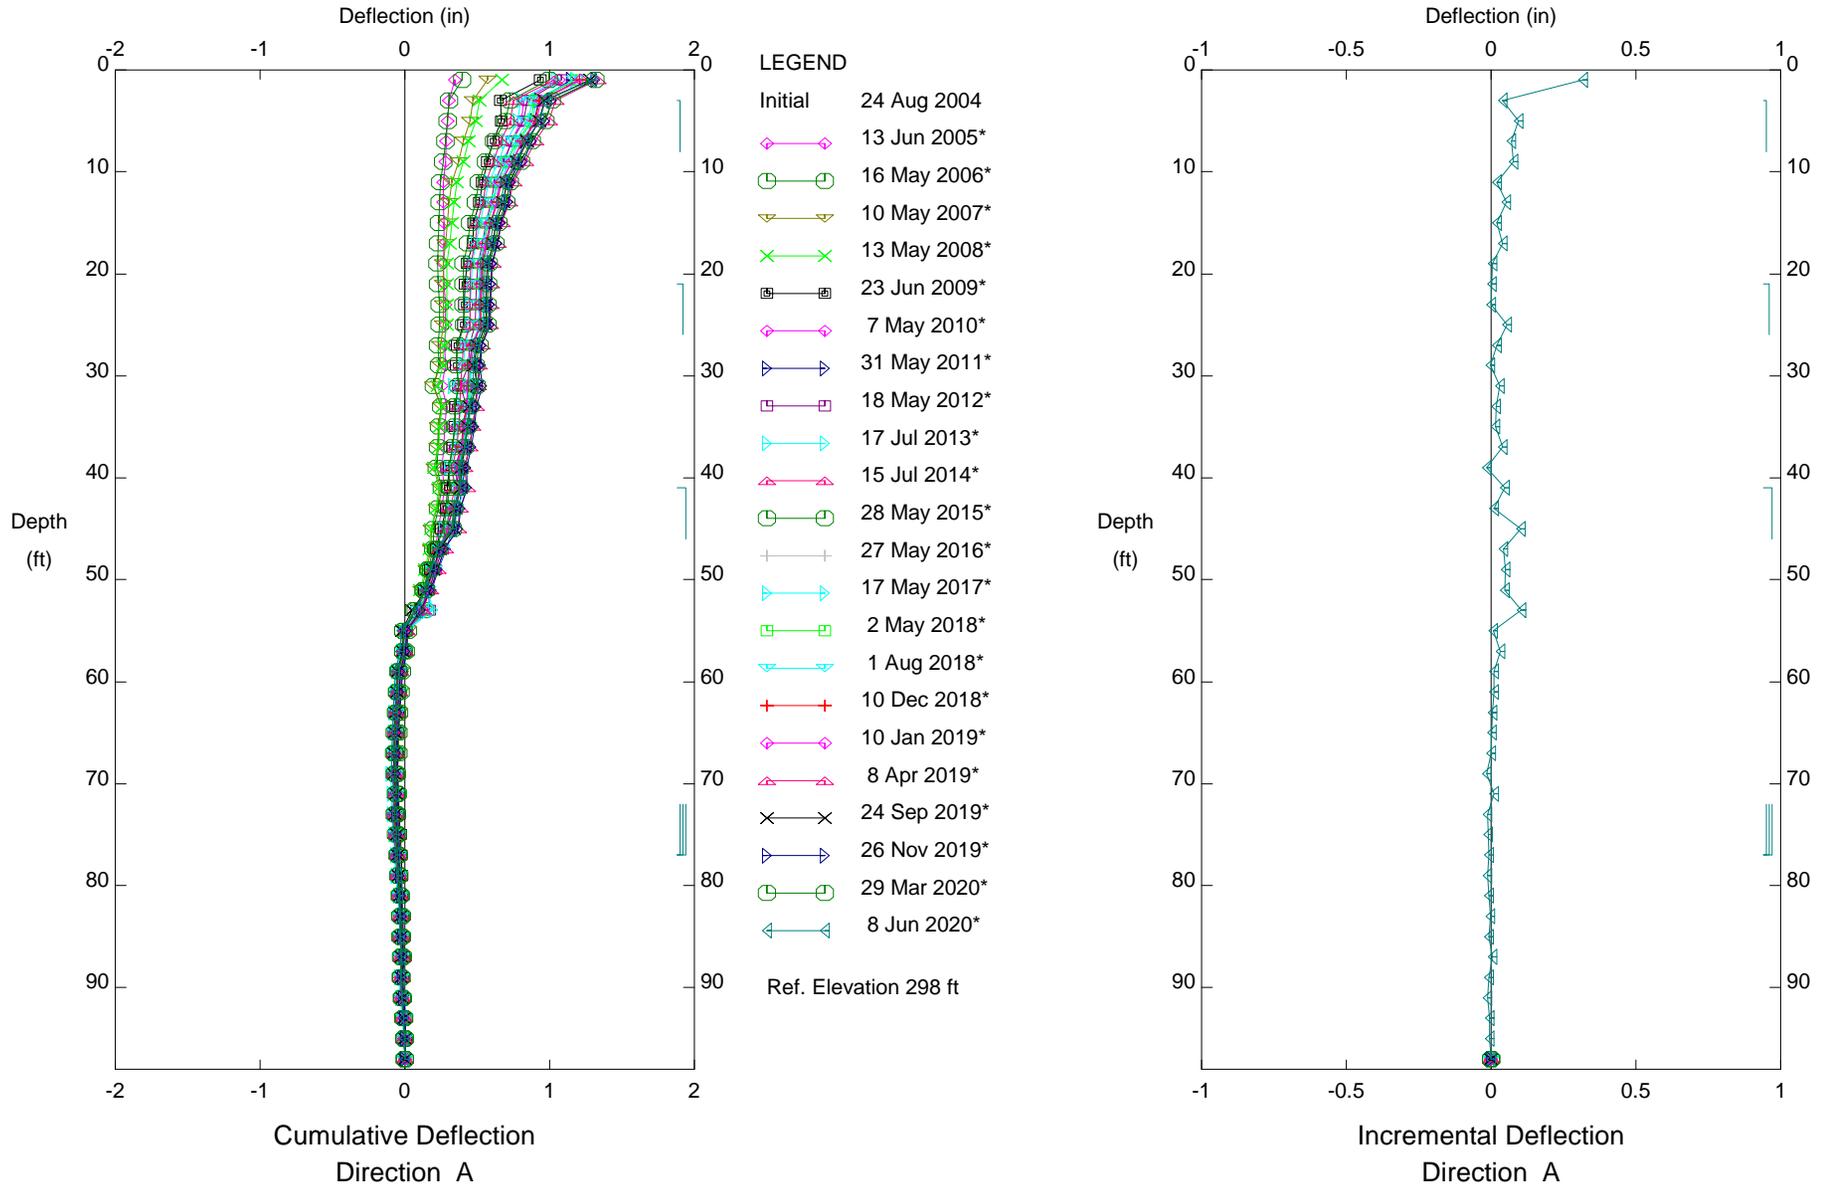

Calle del Barco, Inclinometer SI-9
 City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

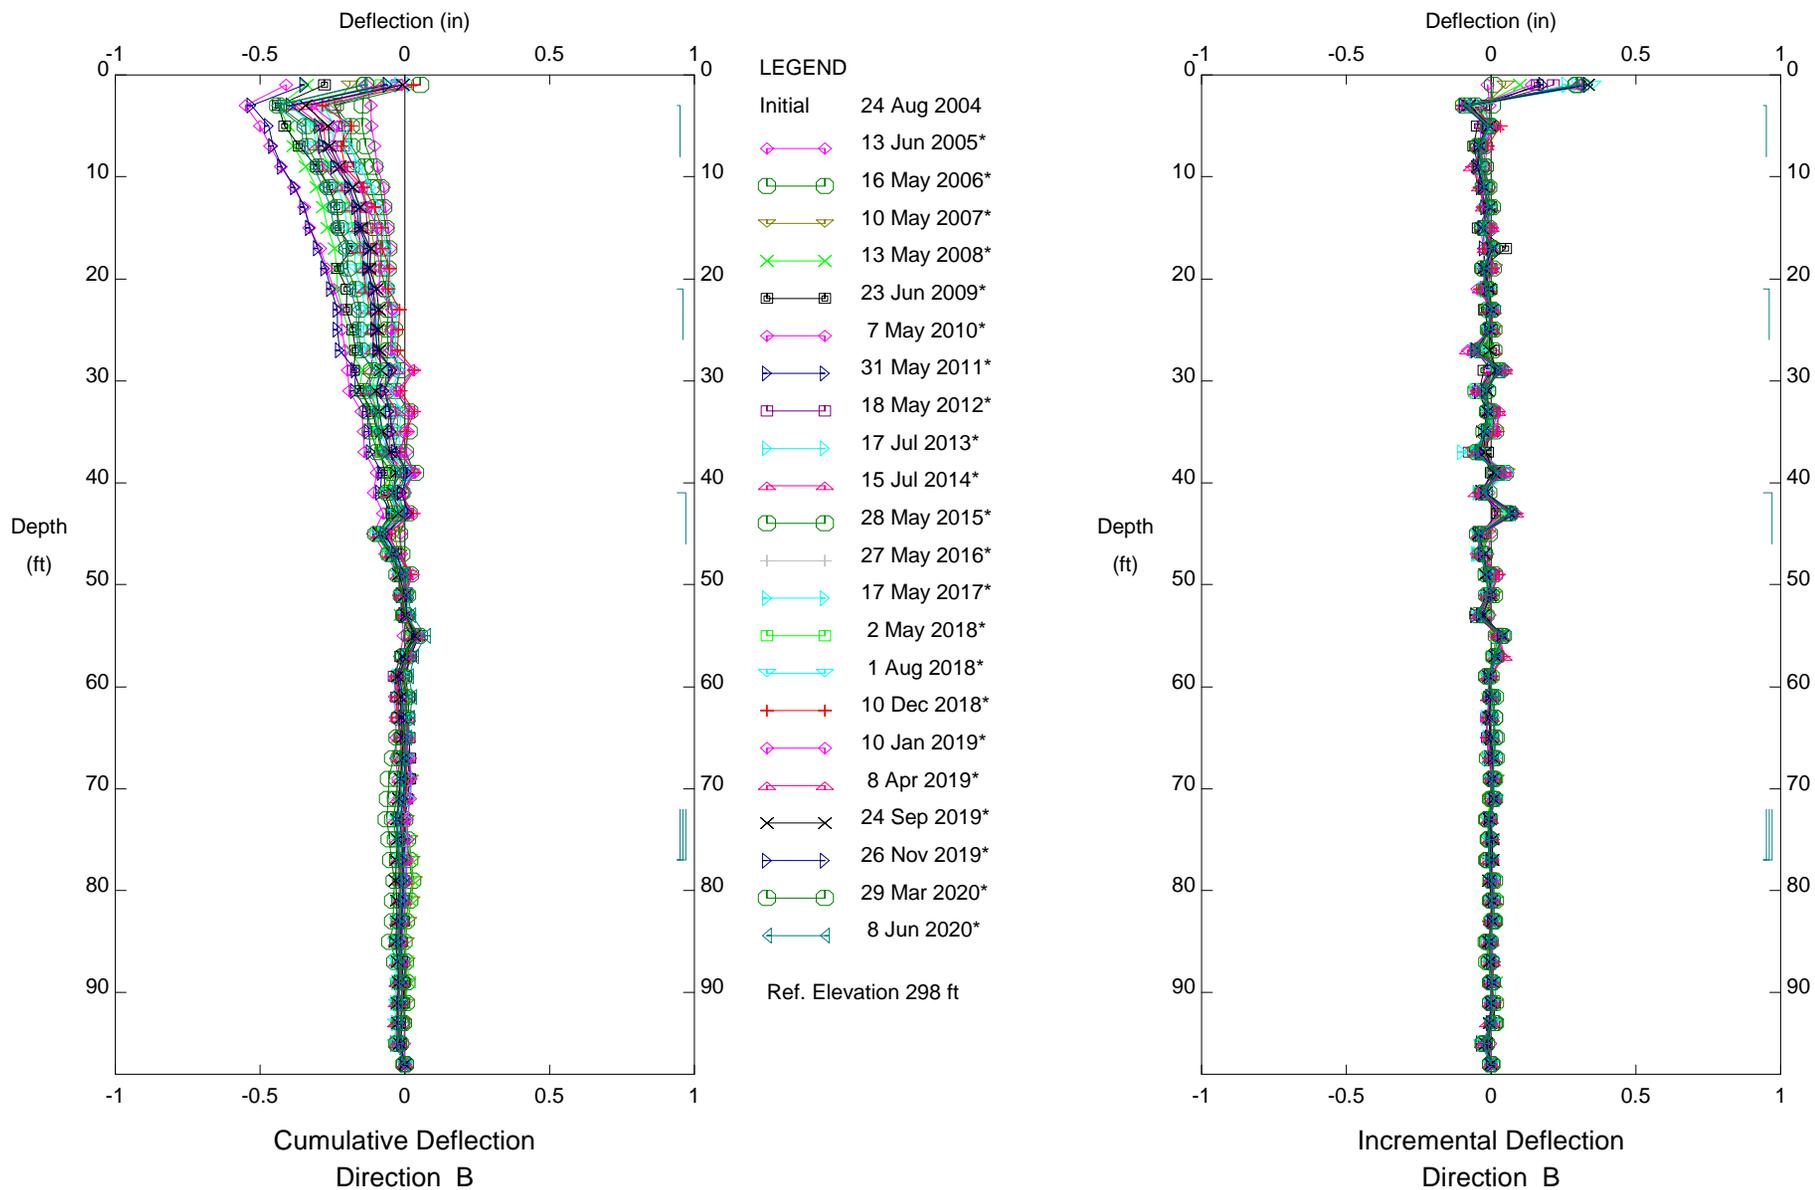

Calle del Barco, Inclinator SI-9
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

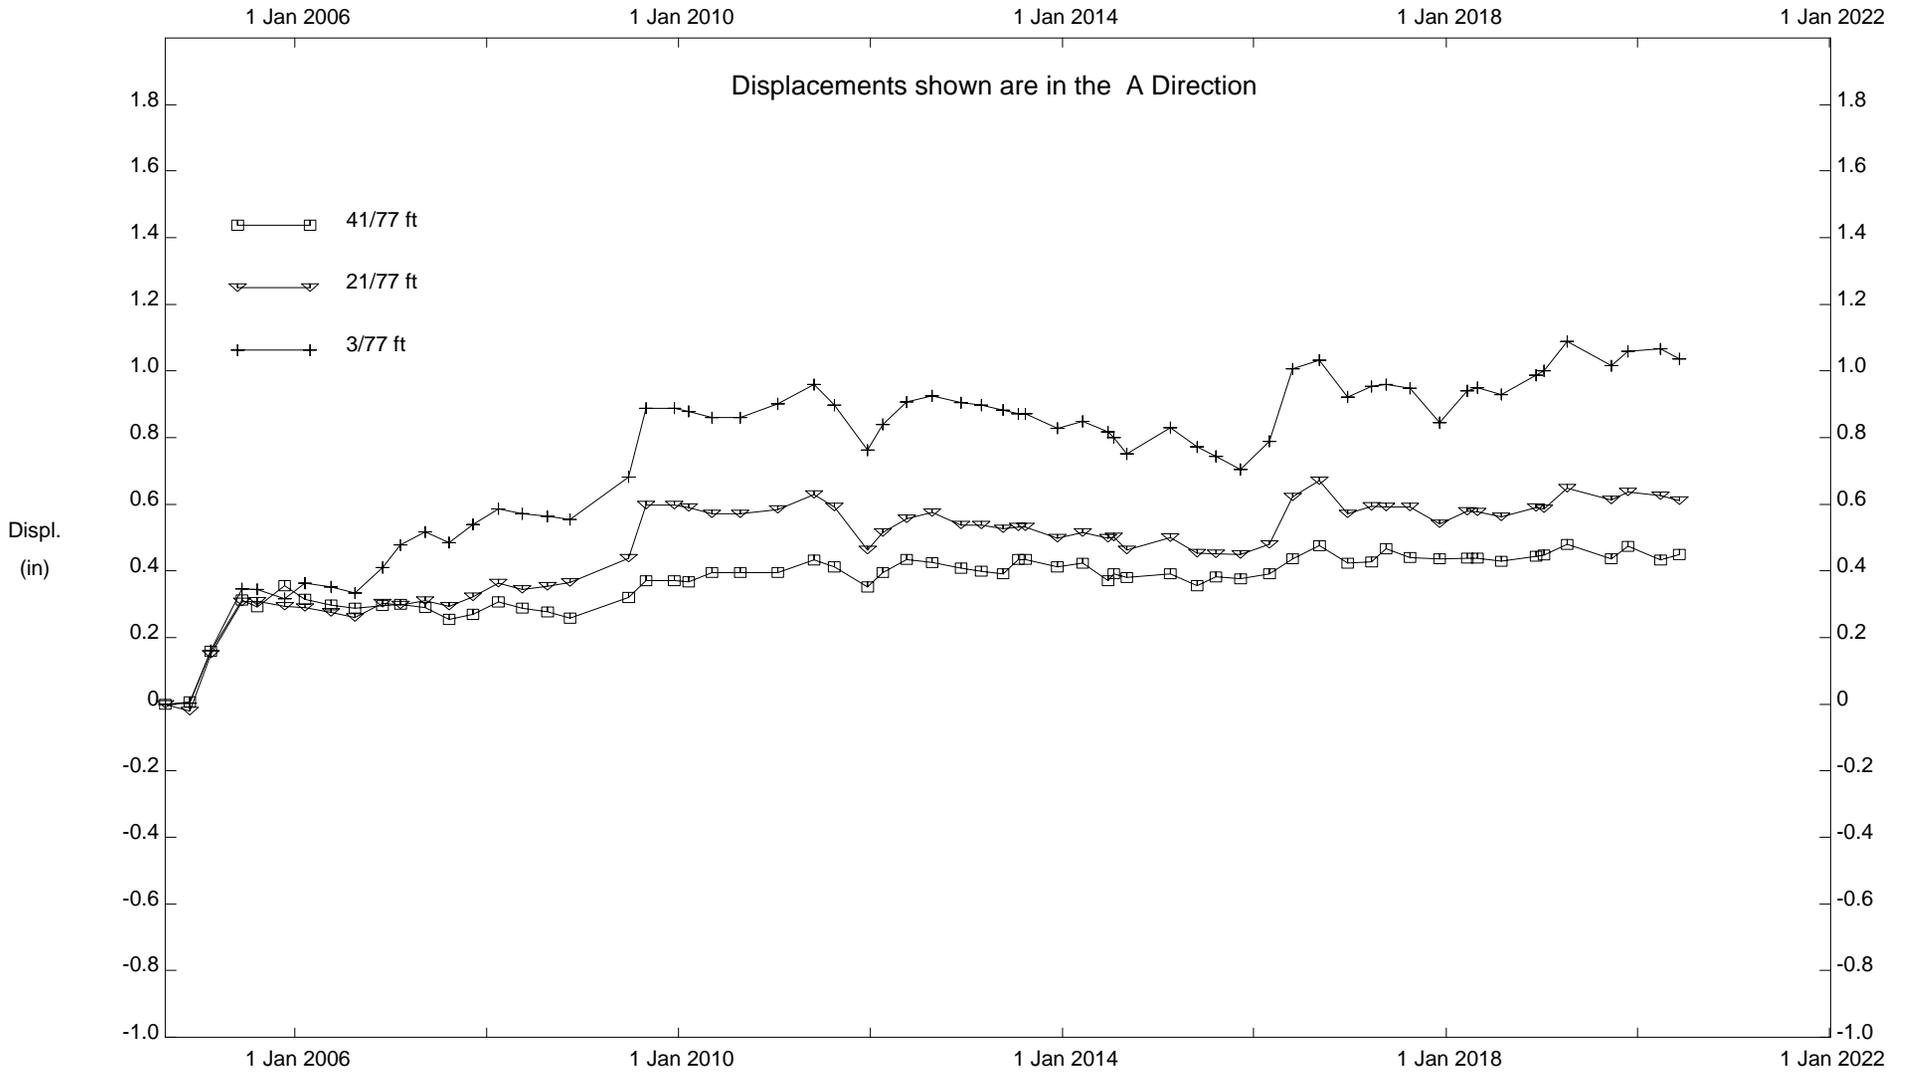

Calle del Barco, Inclinator SI-9

City of Malibu


Fugro West, Inc. - Ventura, CA

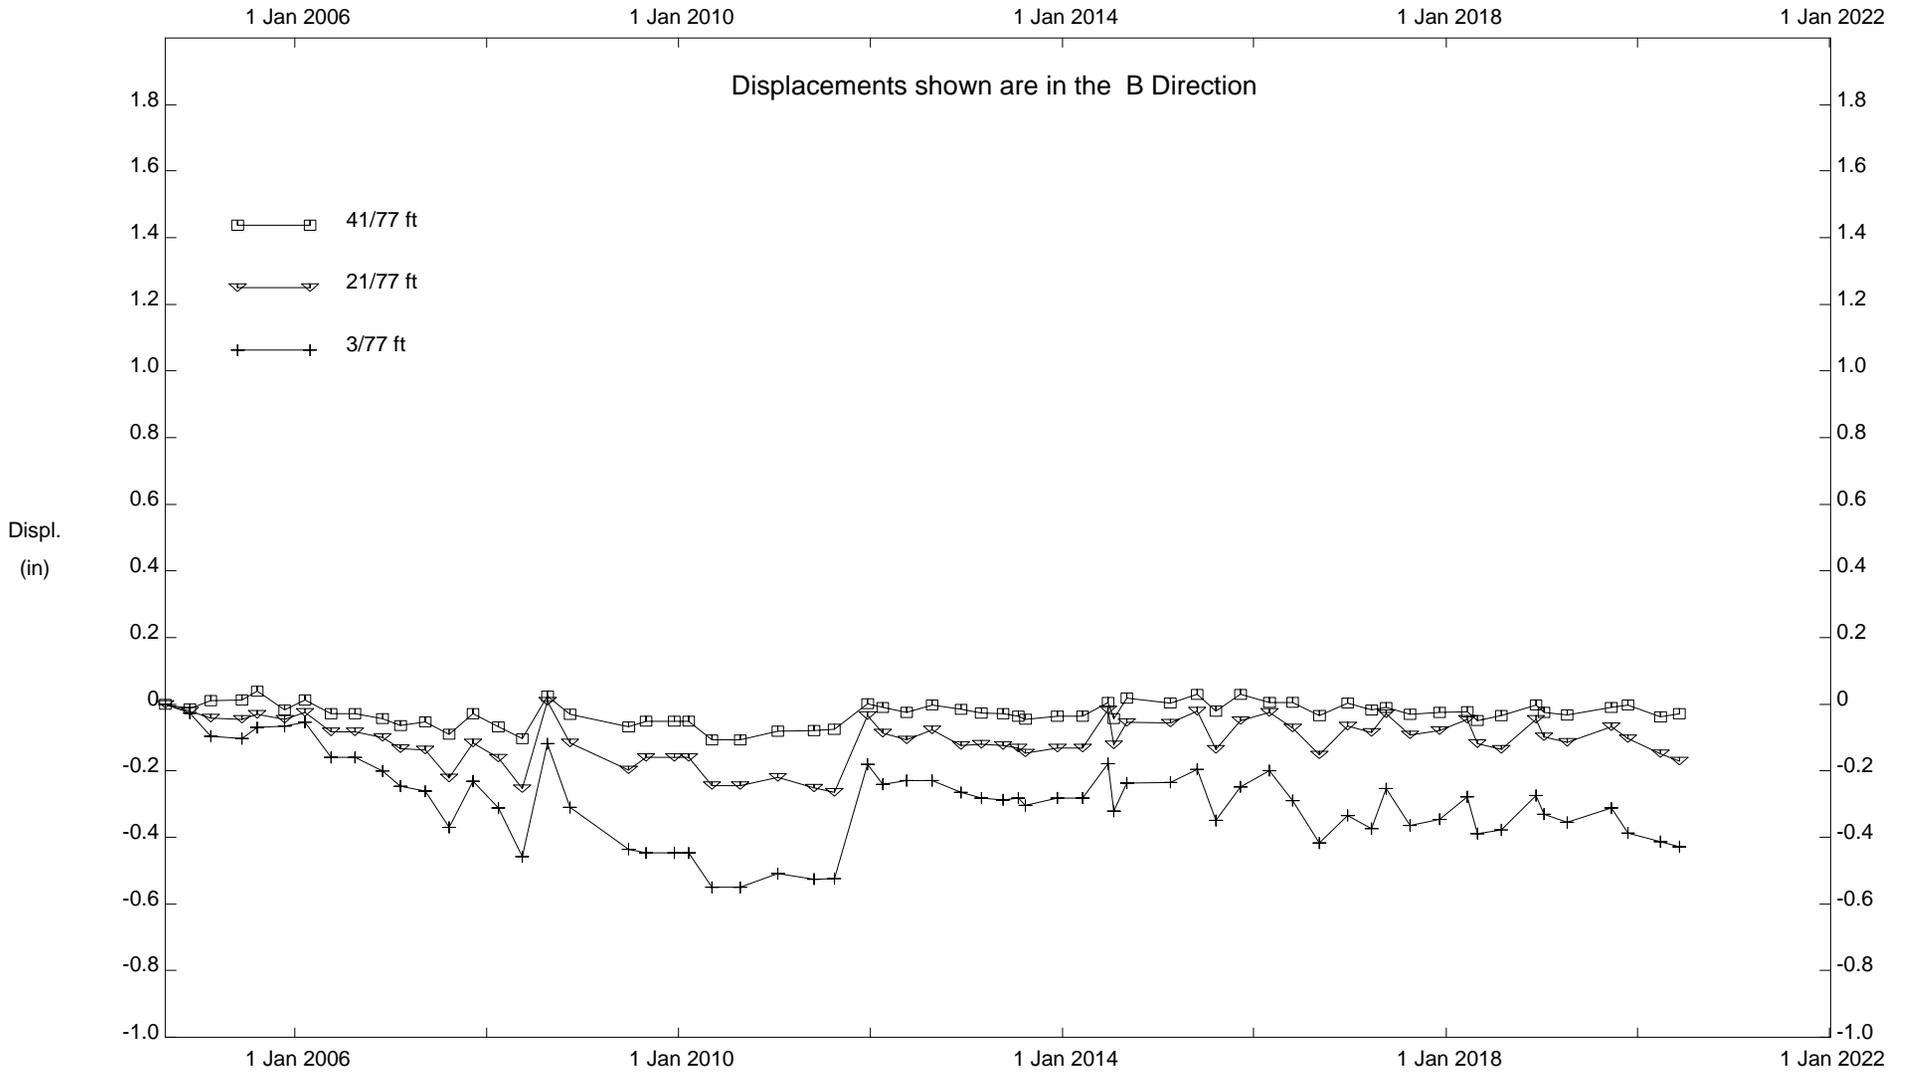

Calle del Barco, Inclinator SI-9

City of Malibu


Fugro West, Inc. - Ventura, CA

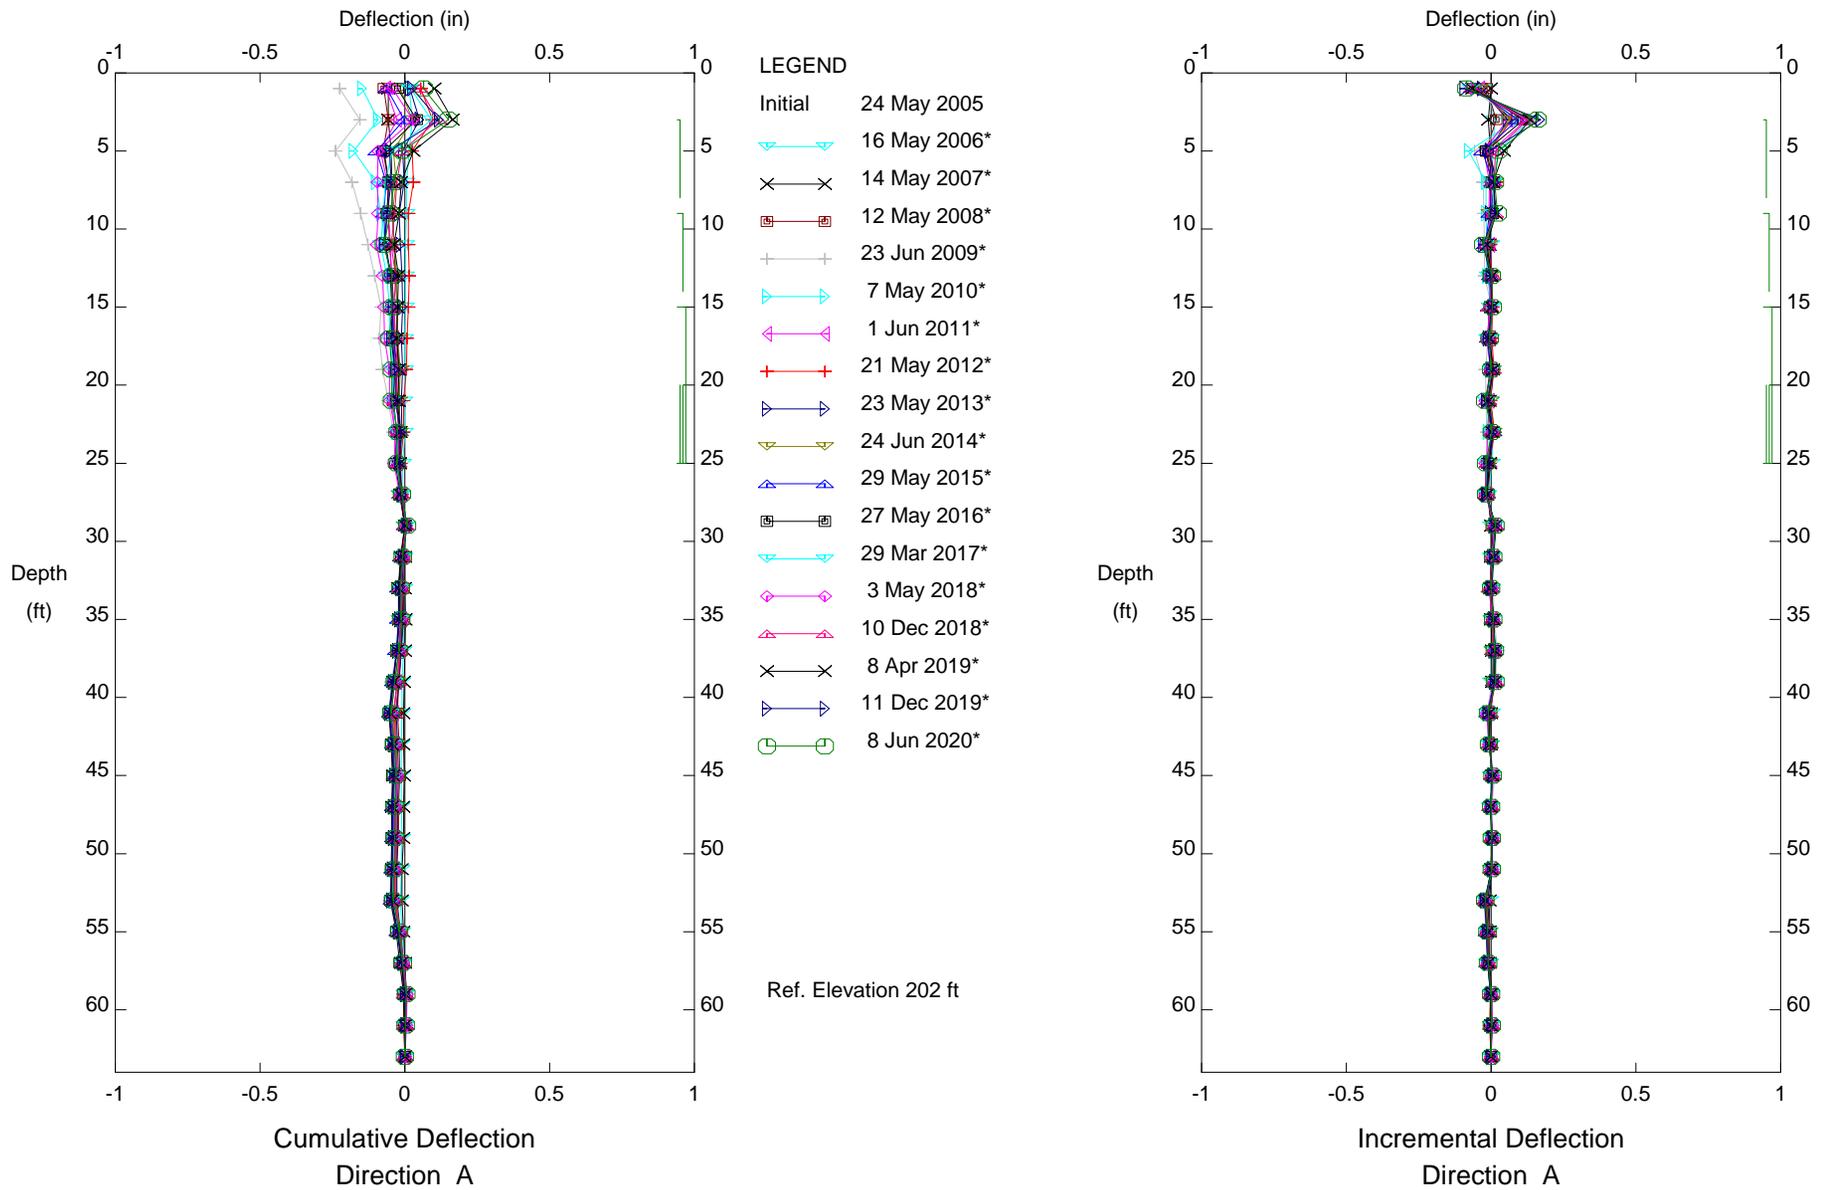

Calle del Barco, Inclinometer SI-10
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

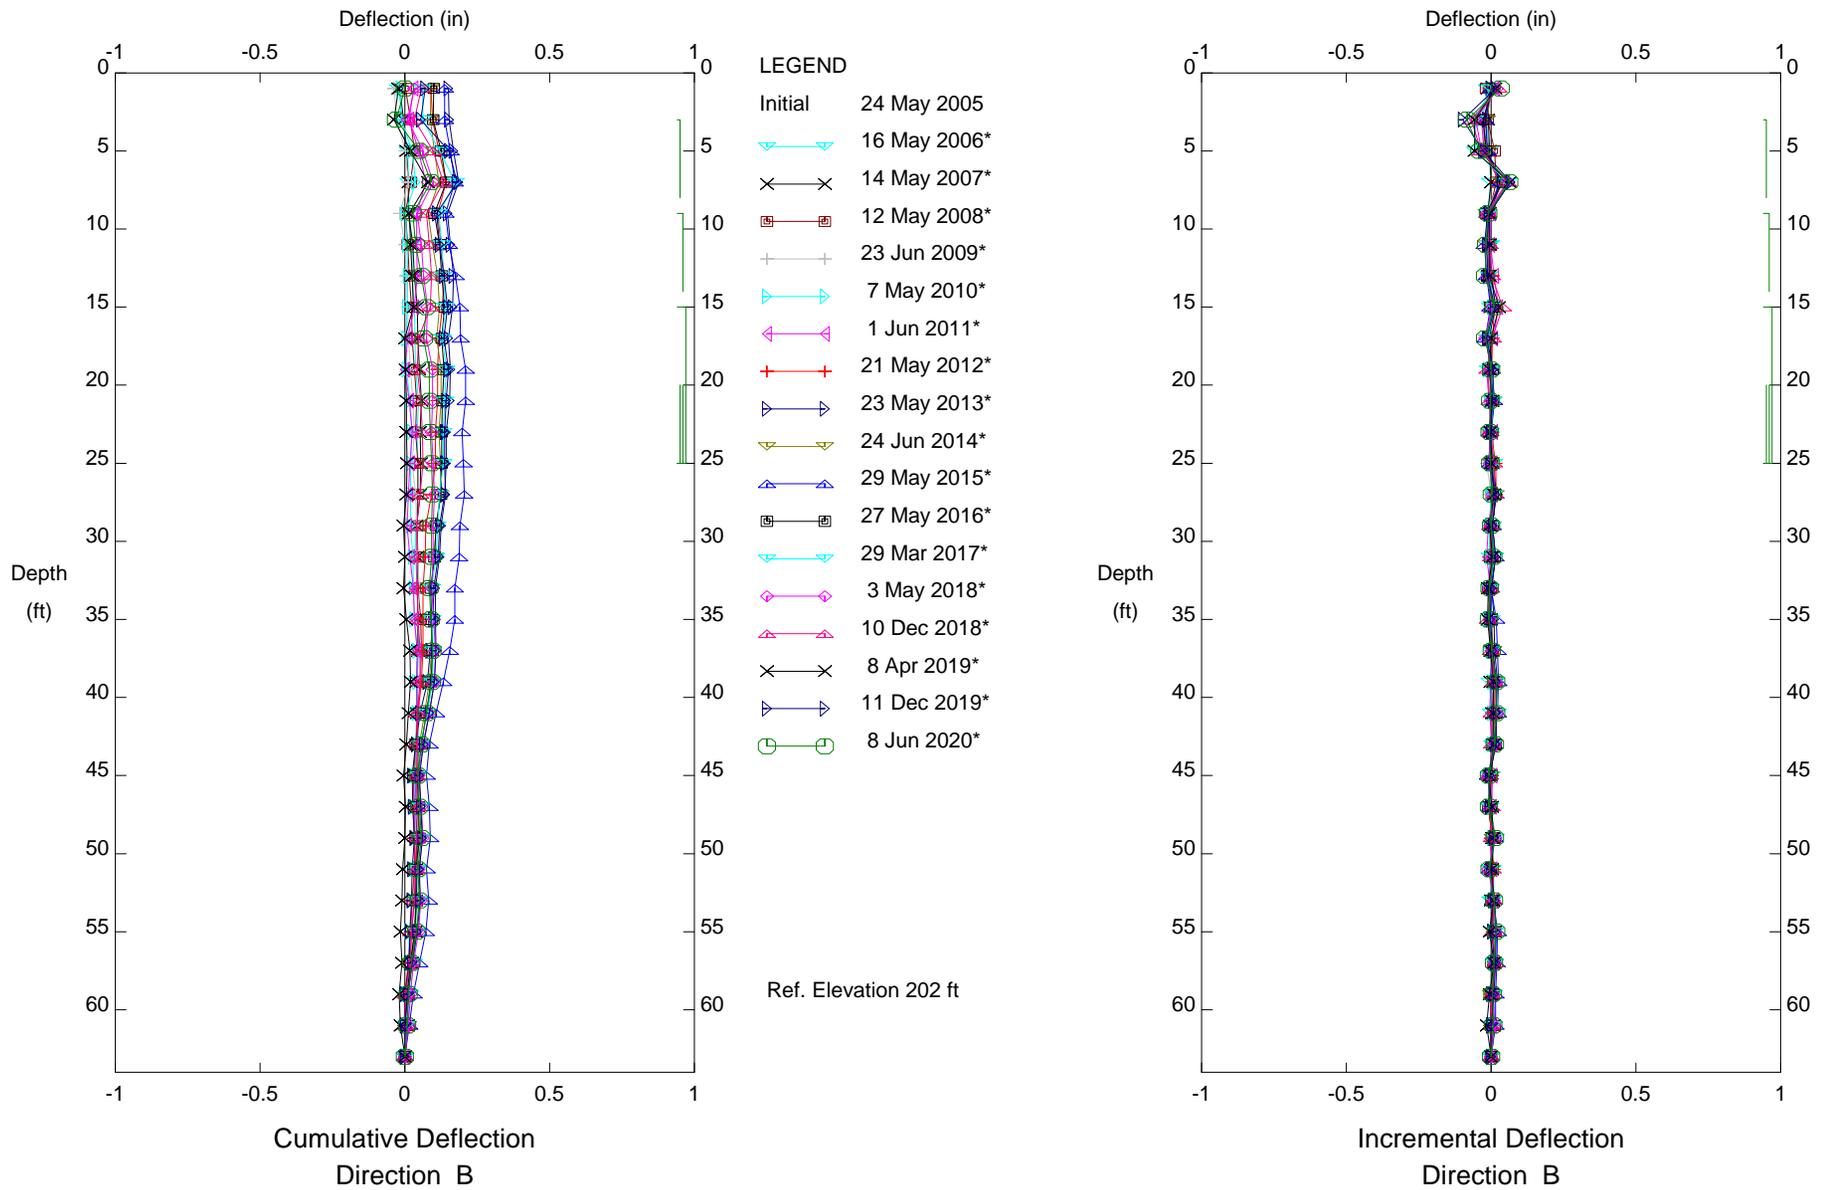

Calle del Barco, Inclinator SI-10
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

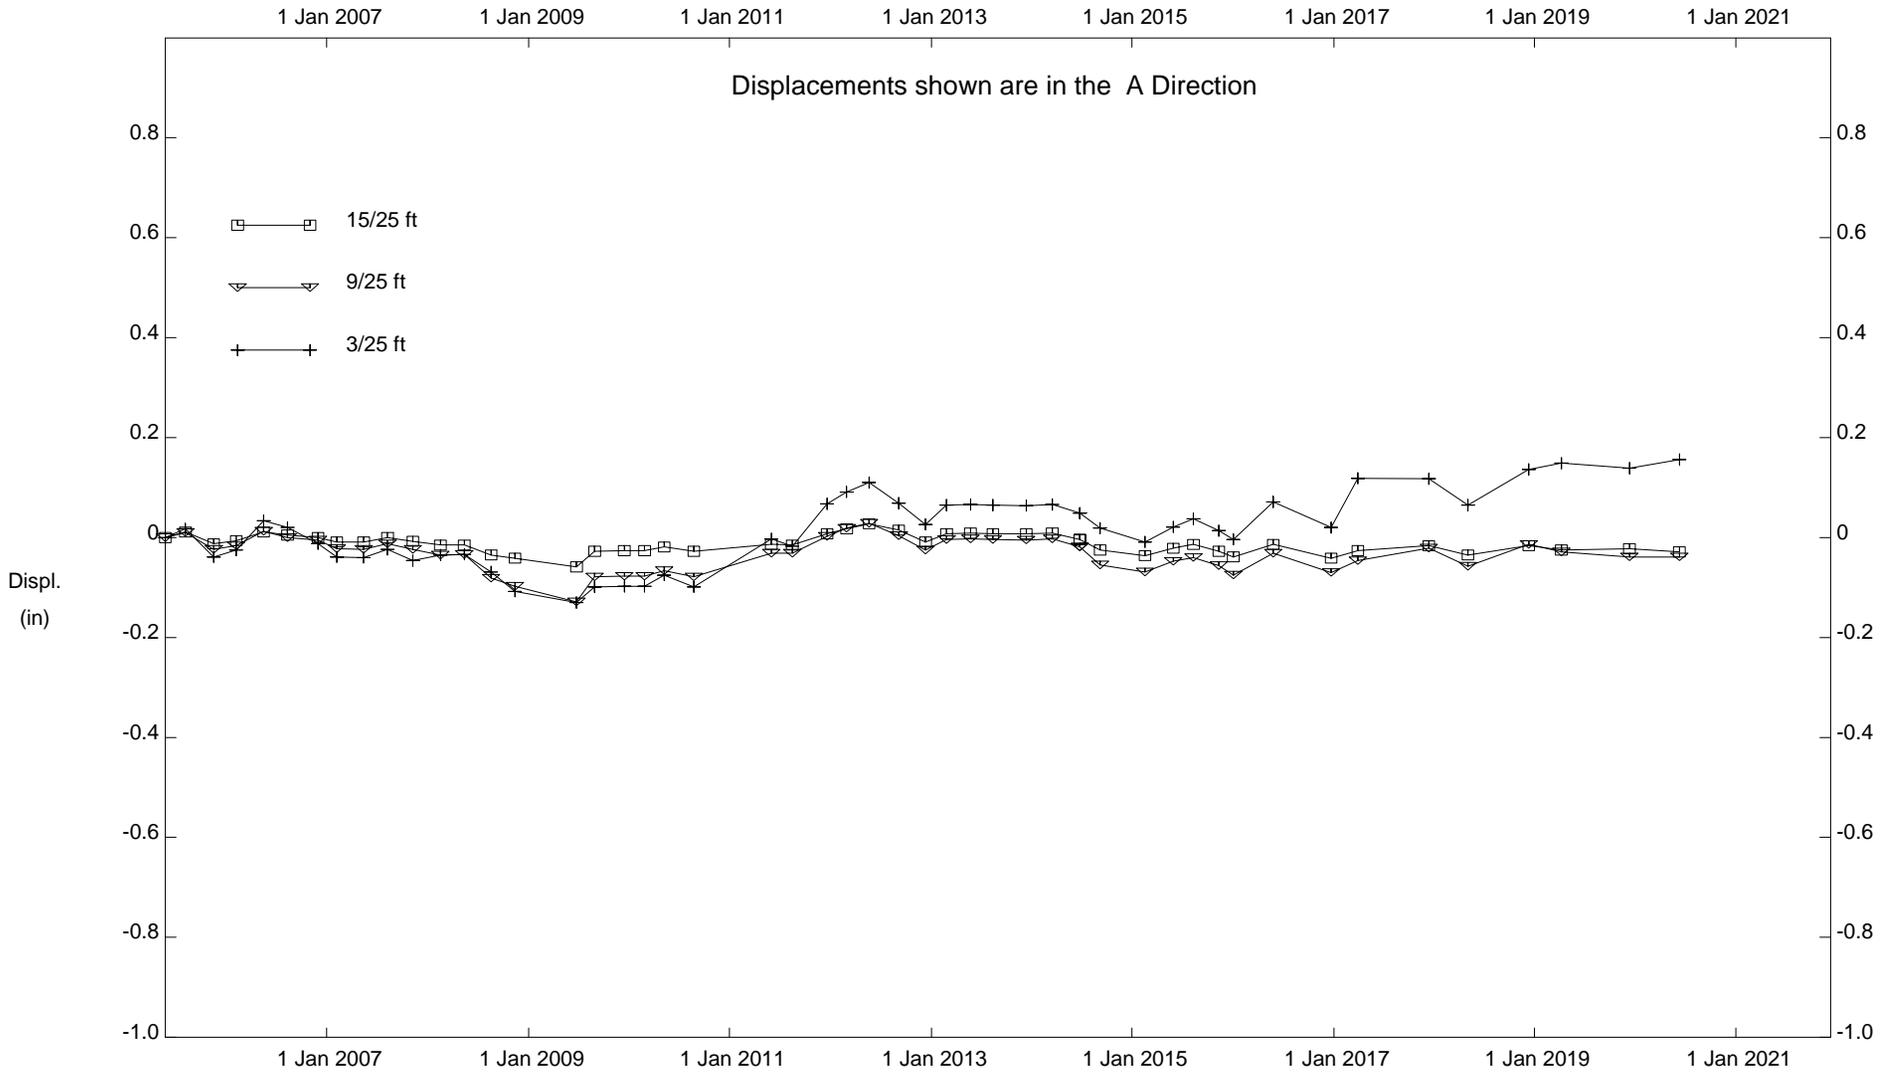

Calle del Barco, Inclinometer SI-10

City of Malibu


Fugro West, Inc. - Ventura, CA

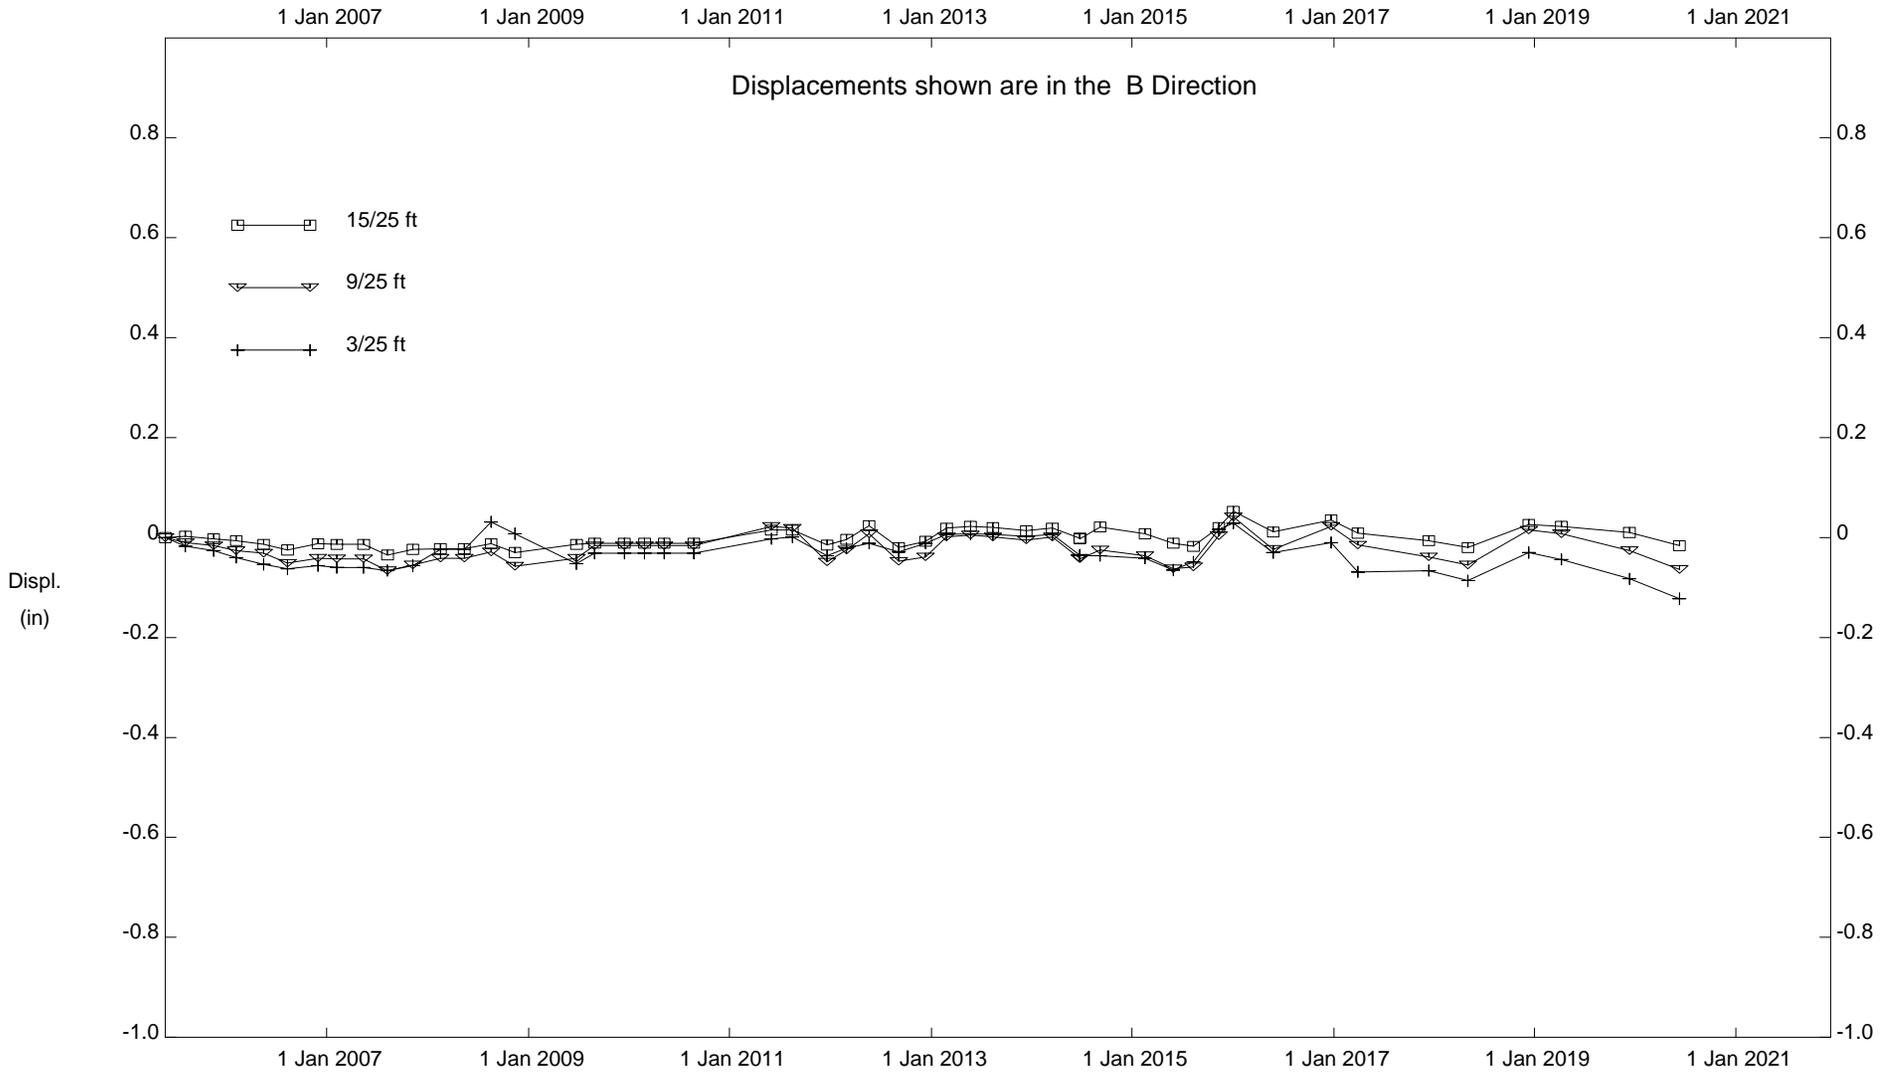

Calle del Barco, Inclinator SI-10

City of Malibu


Fugro West, Inc. - Ventura, CA

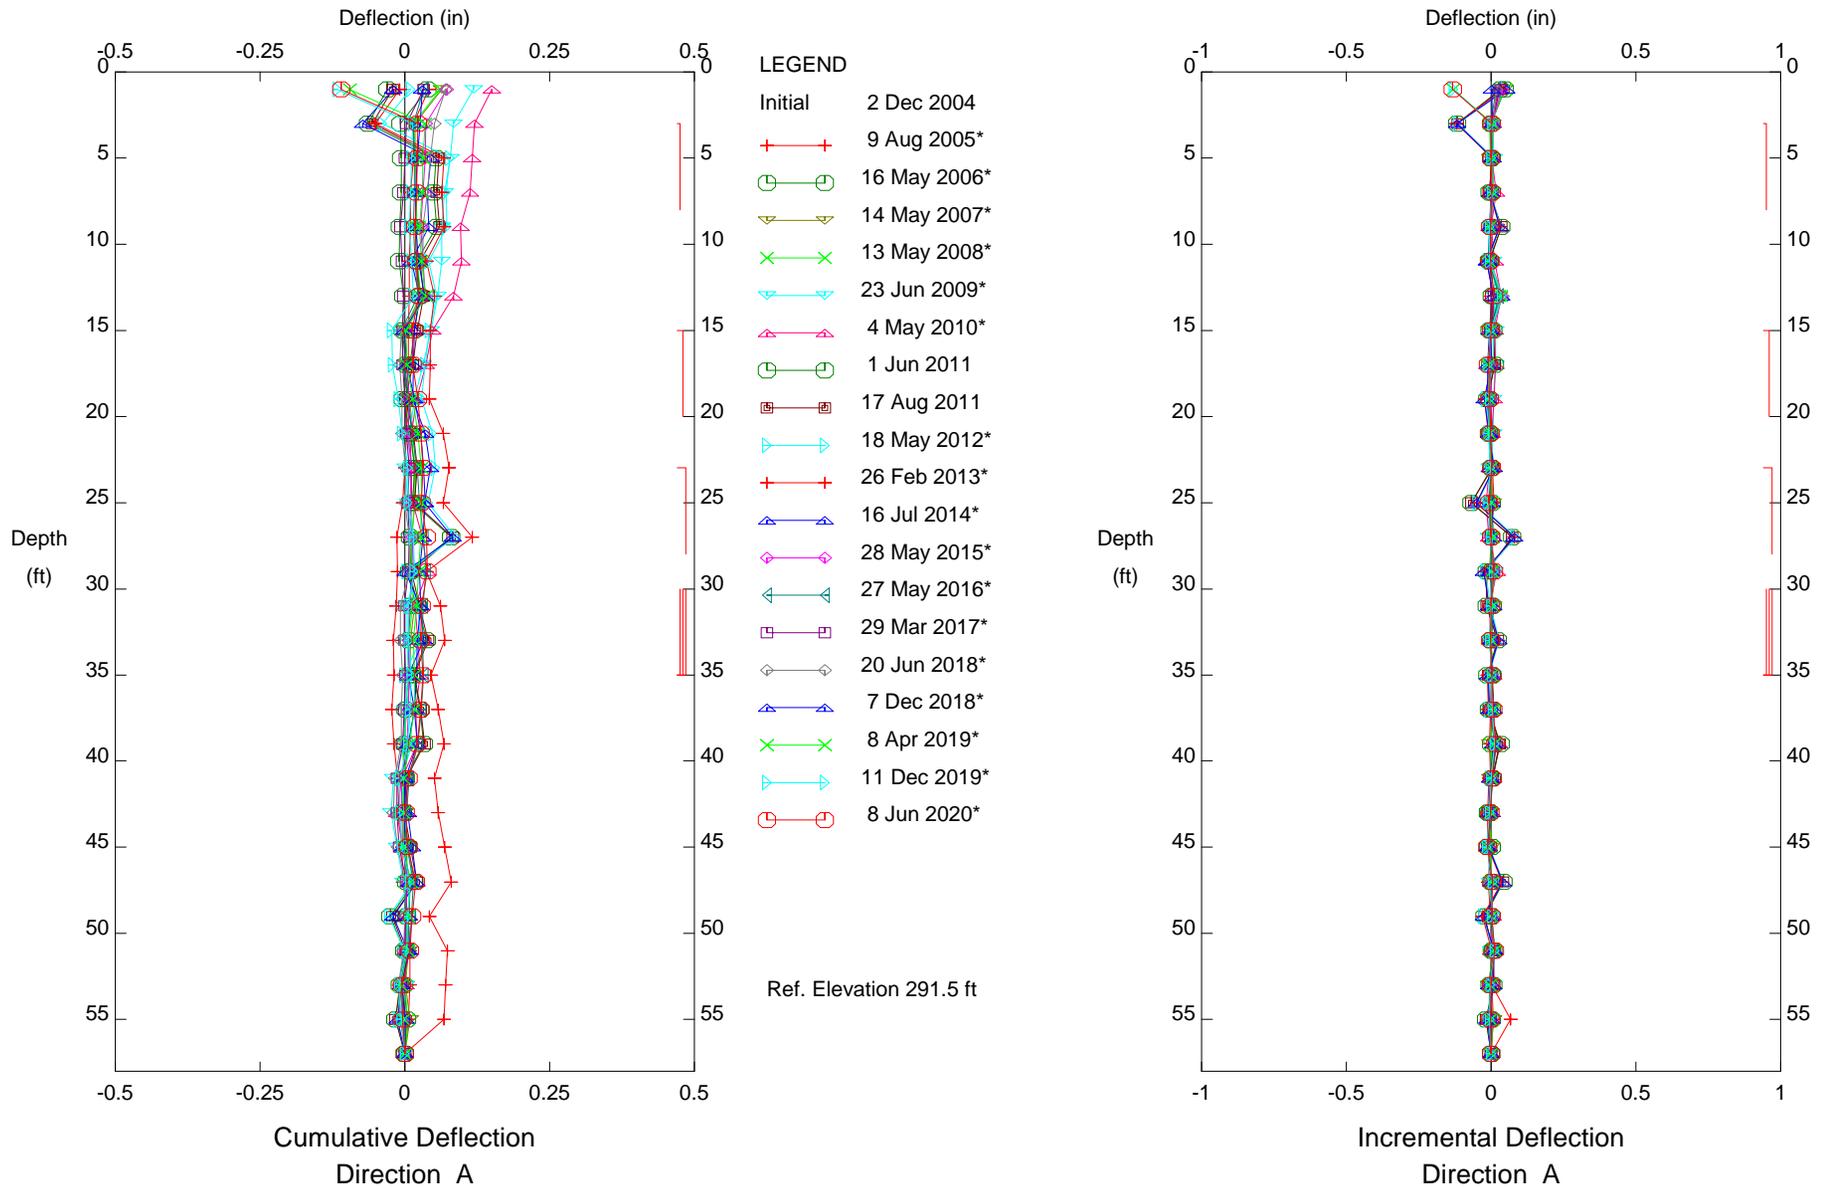

Assessment District 98-2, Inclinometer SI-11
City of Malibu

Sets marked * include zero shift and/or rotation corrections.

Fugro West, Inc. - Ventura, CA

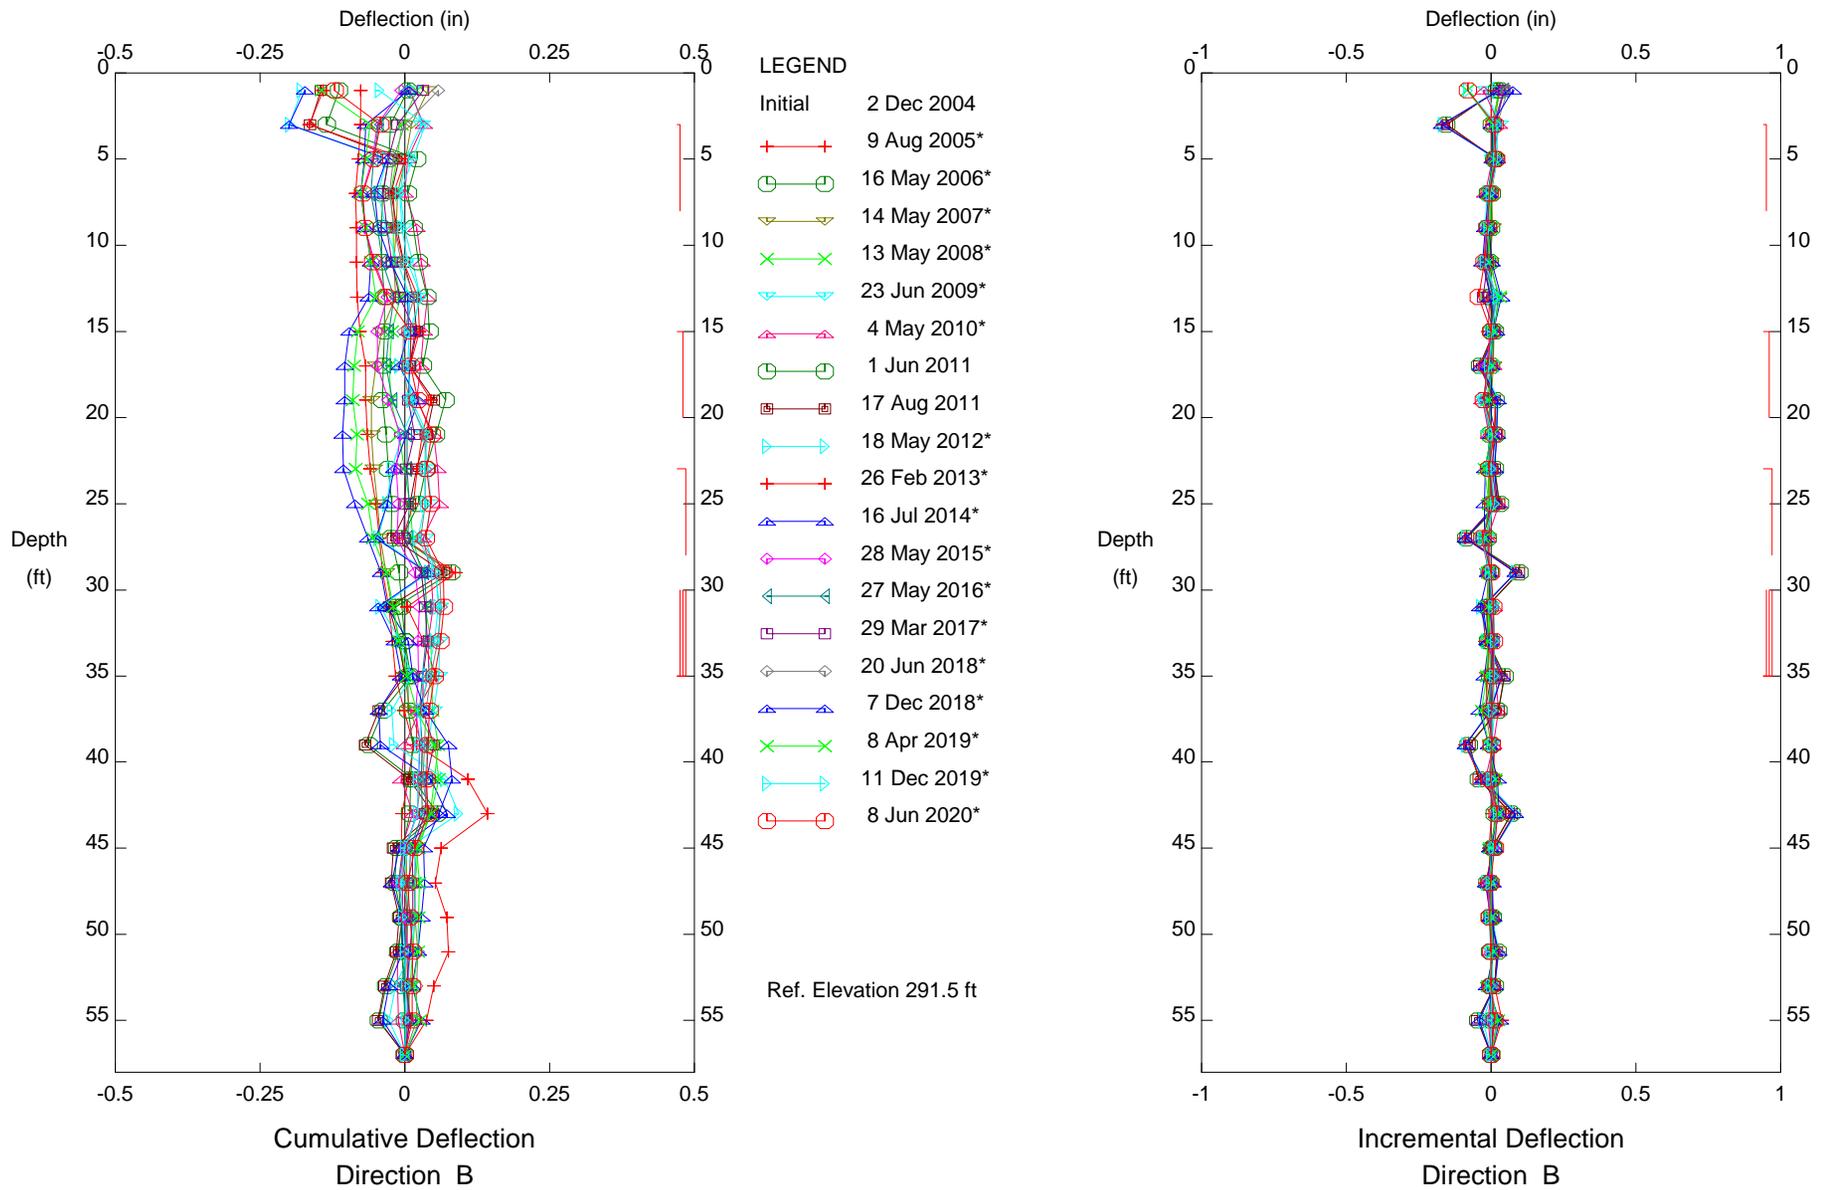


Assessment District 98-2, Inclinometer SI-11

City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

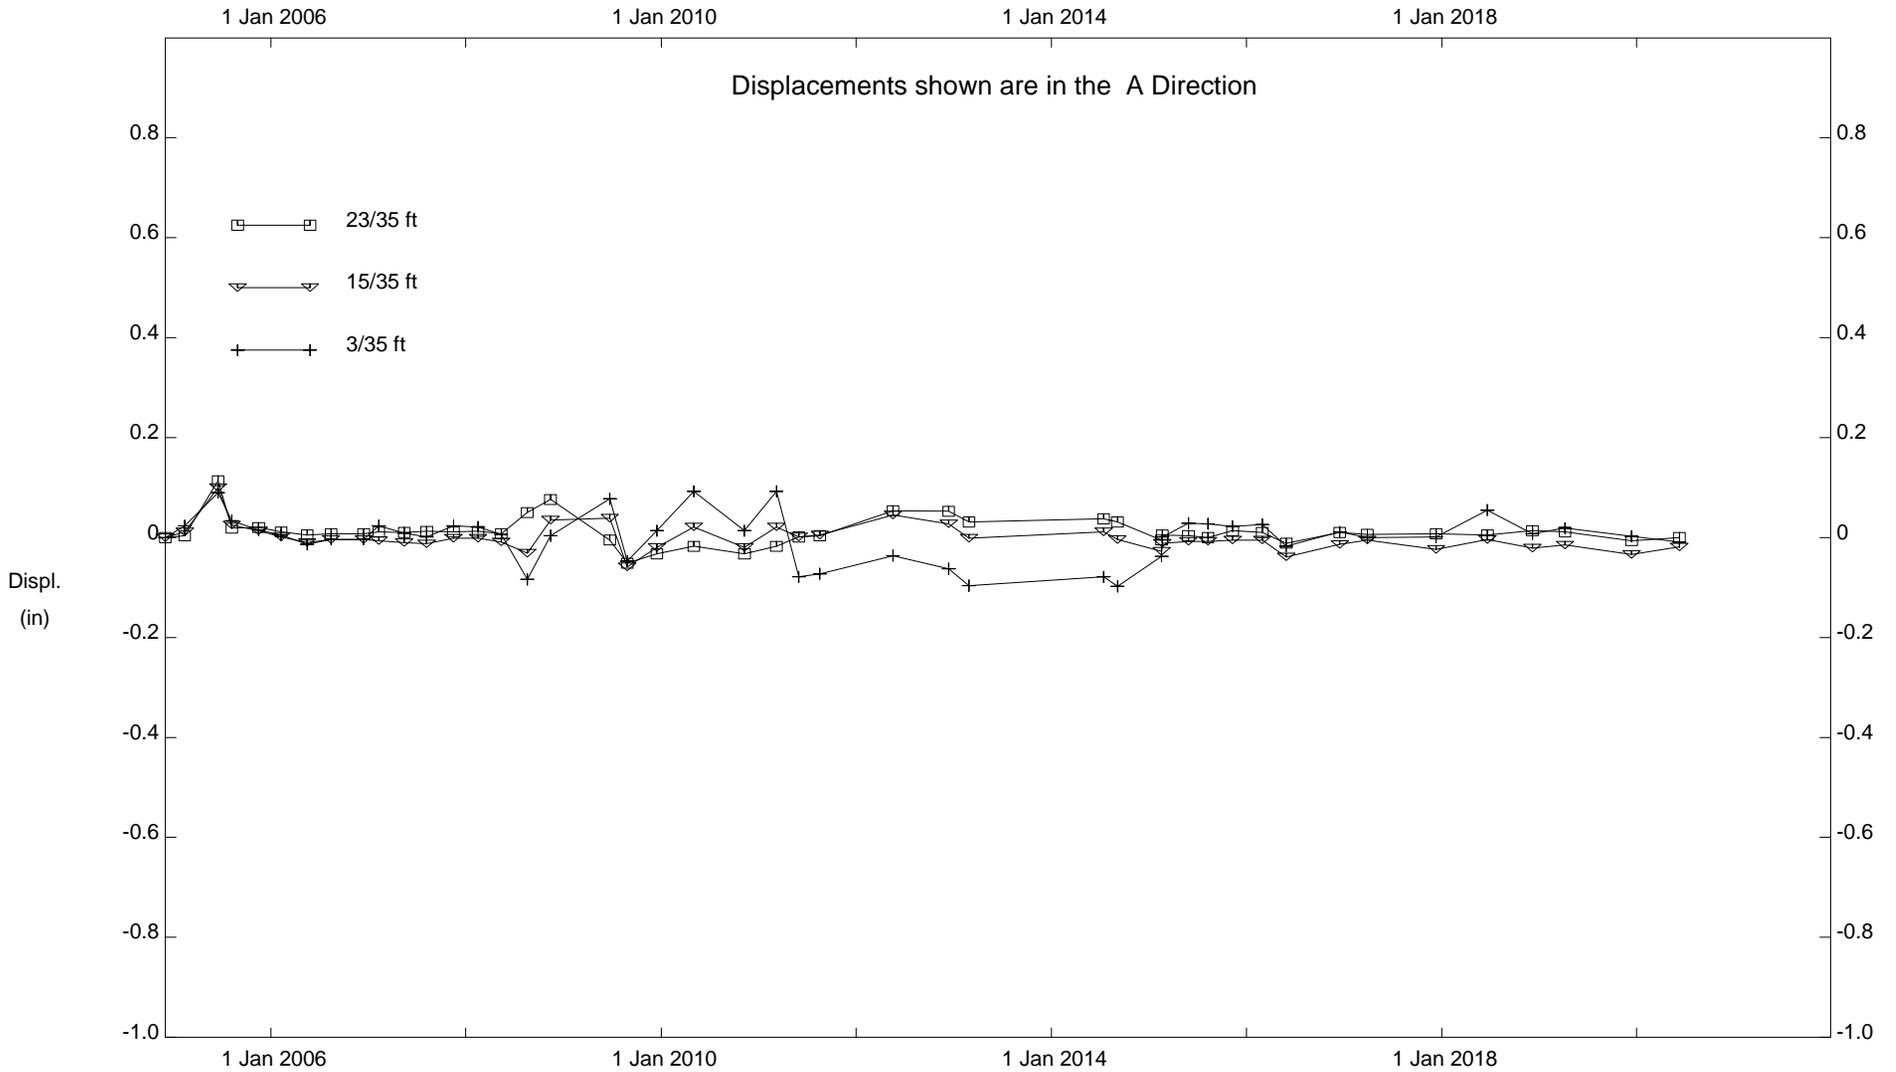

Assessment District 98-2, Inclinator SI-11

City of Malibu


Fugro West, Inc. - Ventura, CA

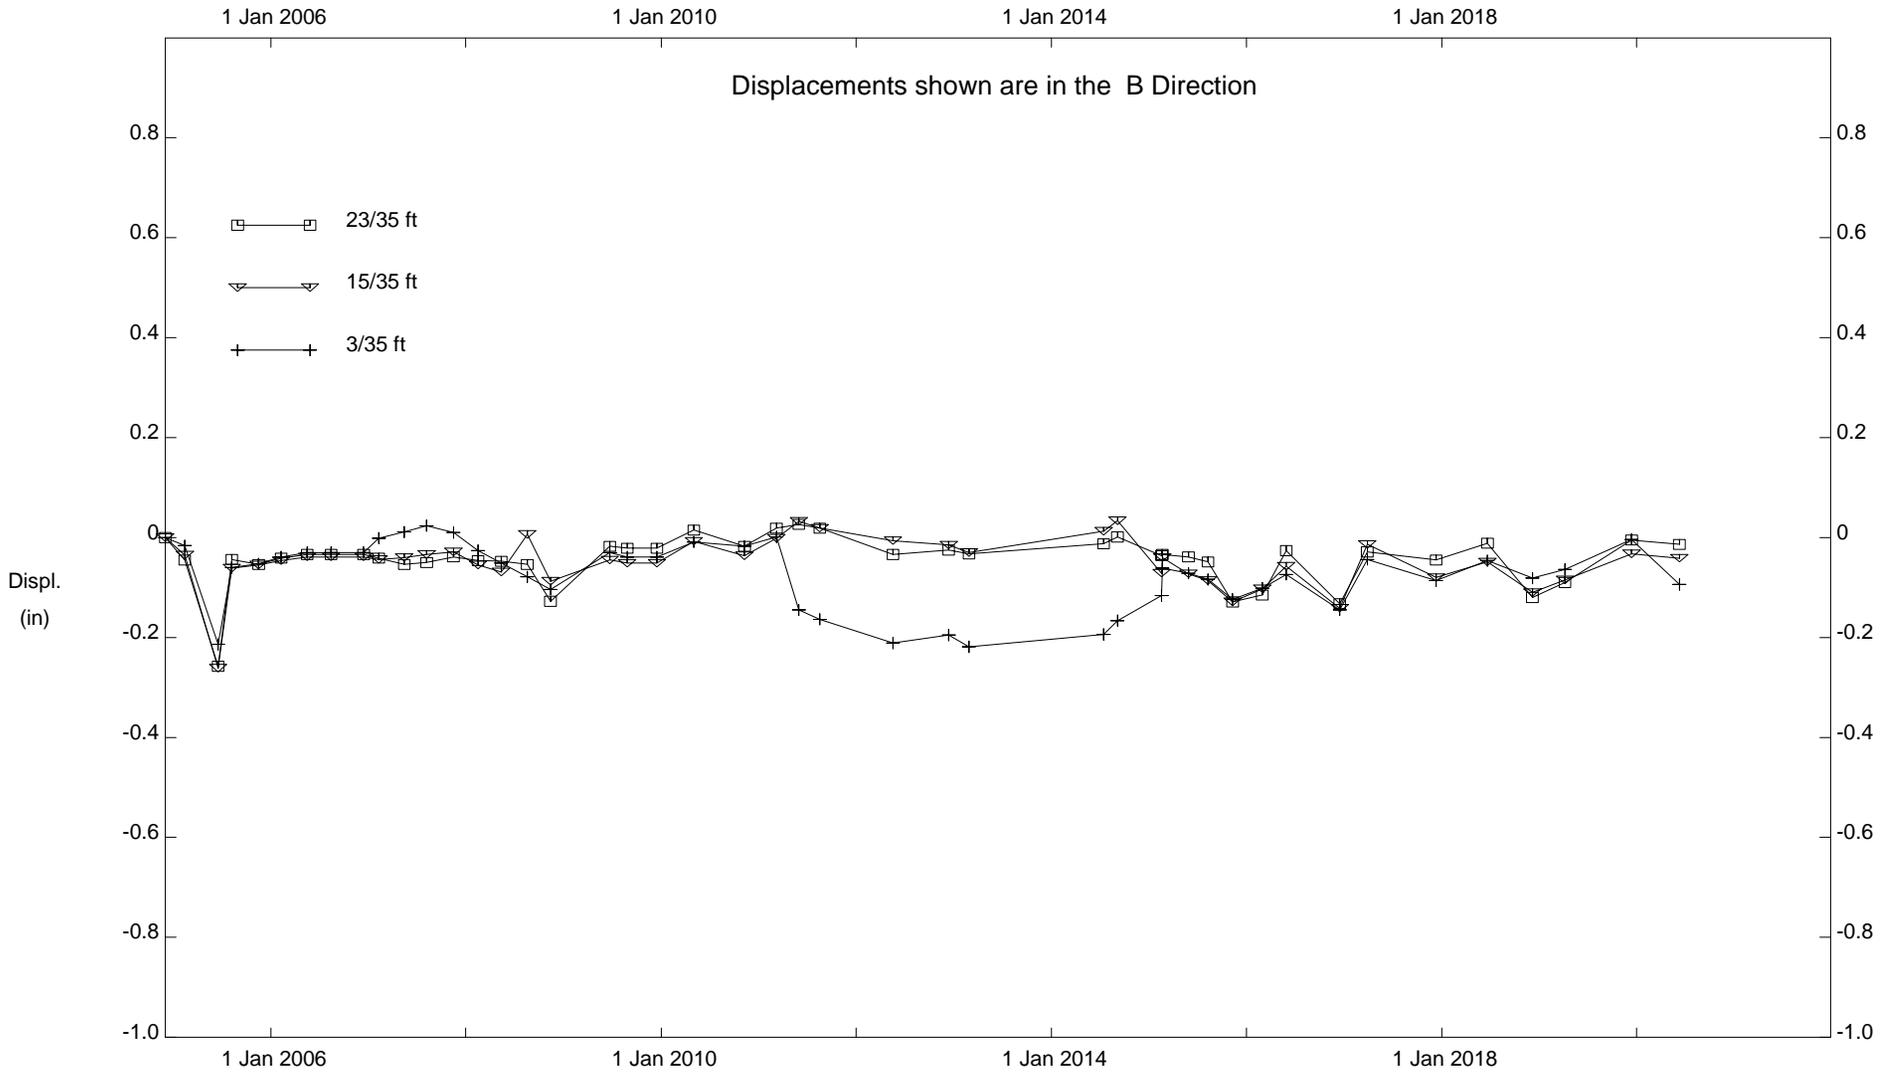

Assessment District 98-2, Inclinator SI-11

City of Malibu


Fugro West, Inc. - Ventura, CA

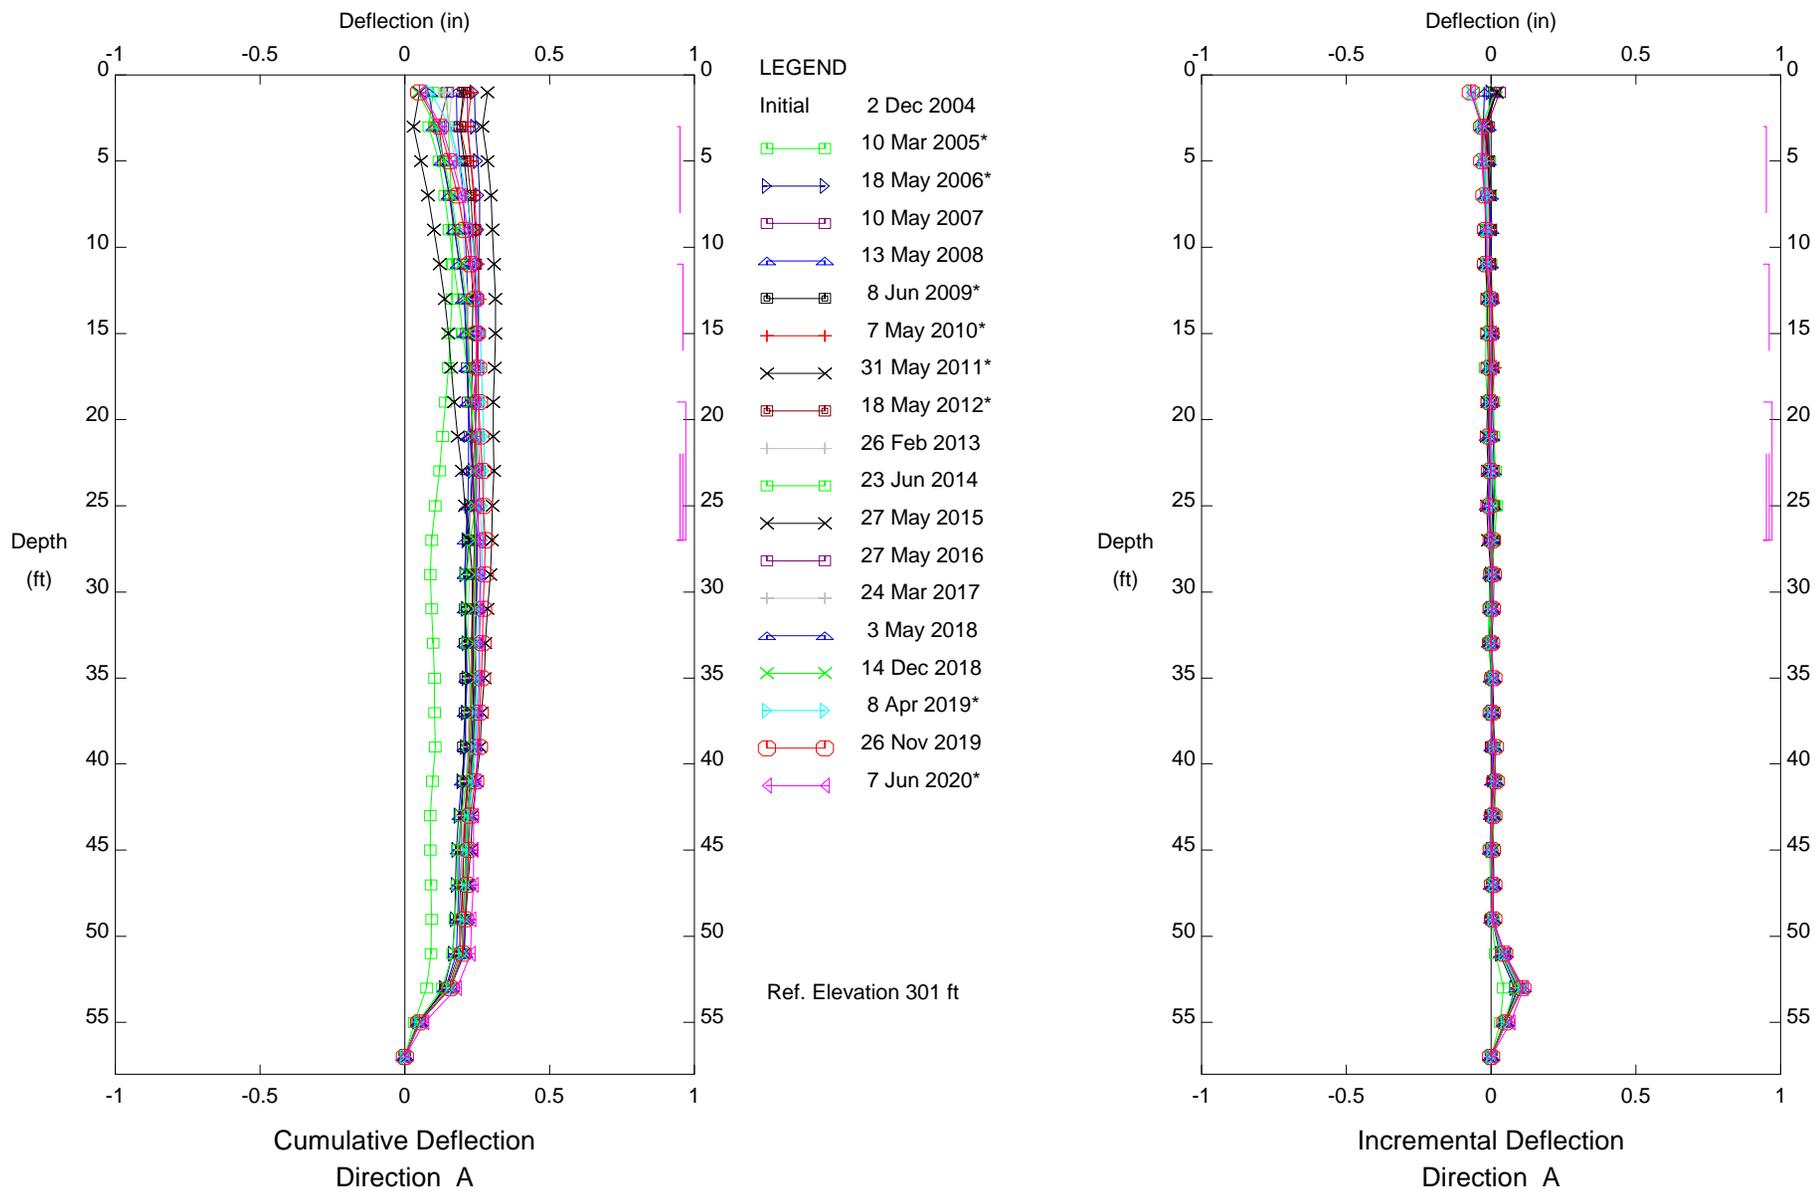

Assessment District 98-2, Inclinometer SI-12
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

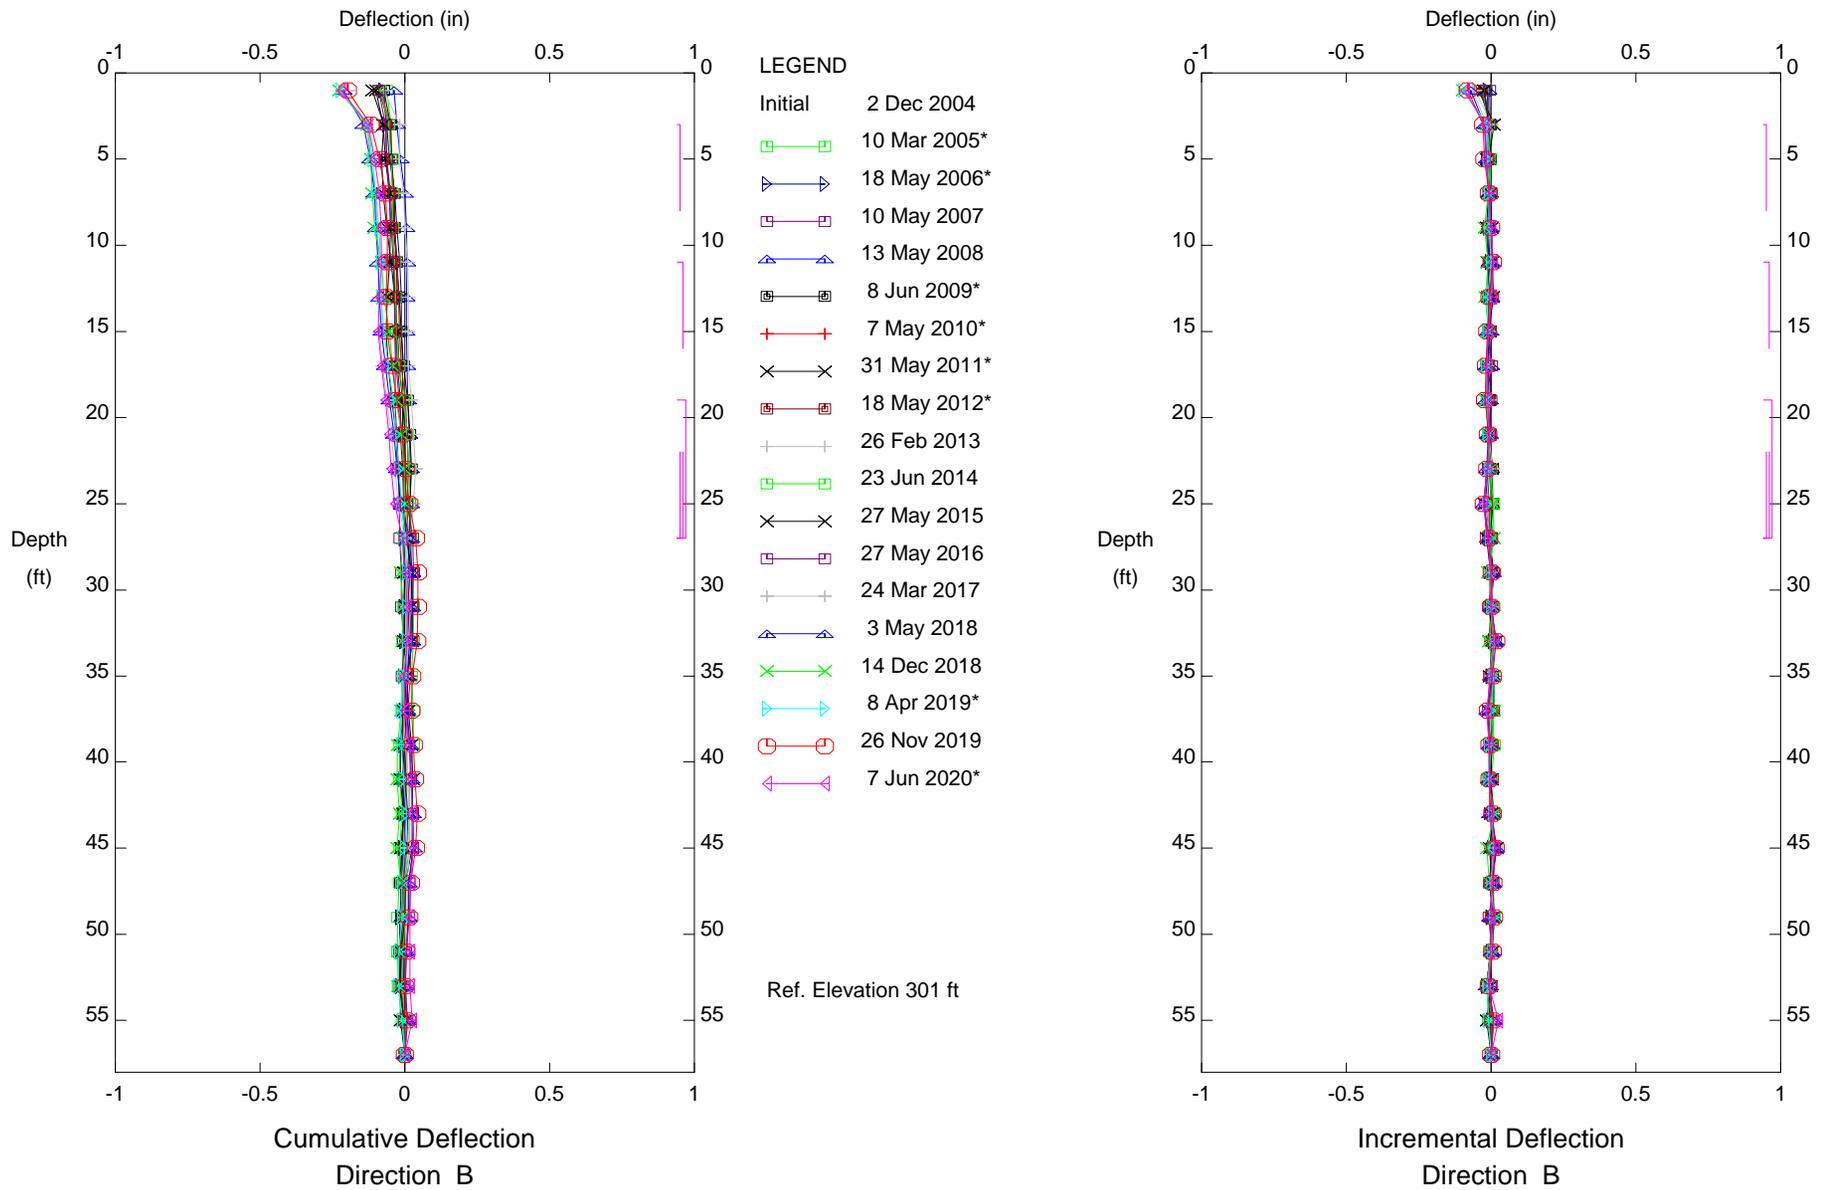

Assessment District 98-2, Inclinometer SI-12
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

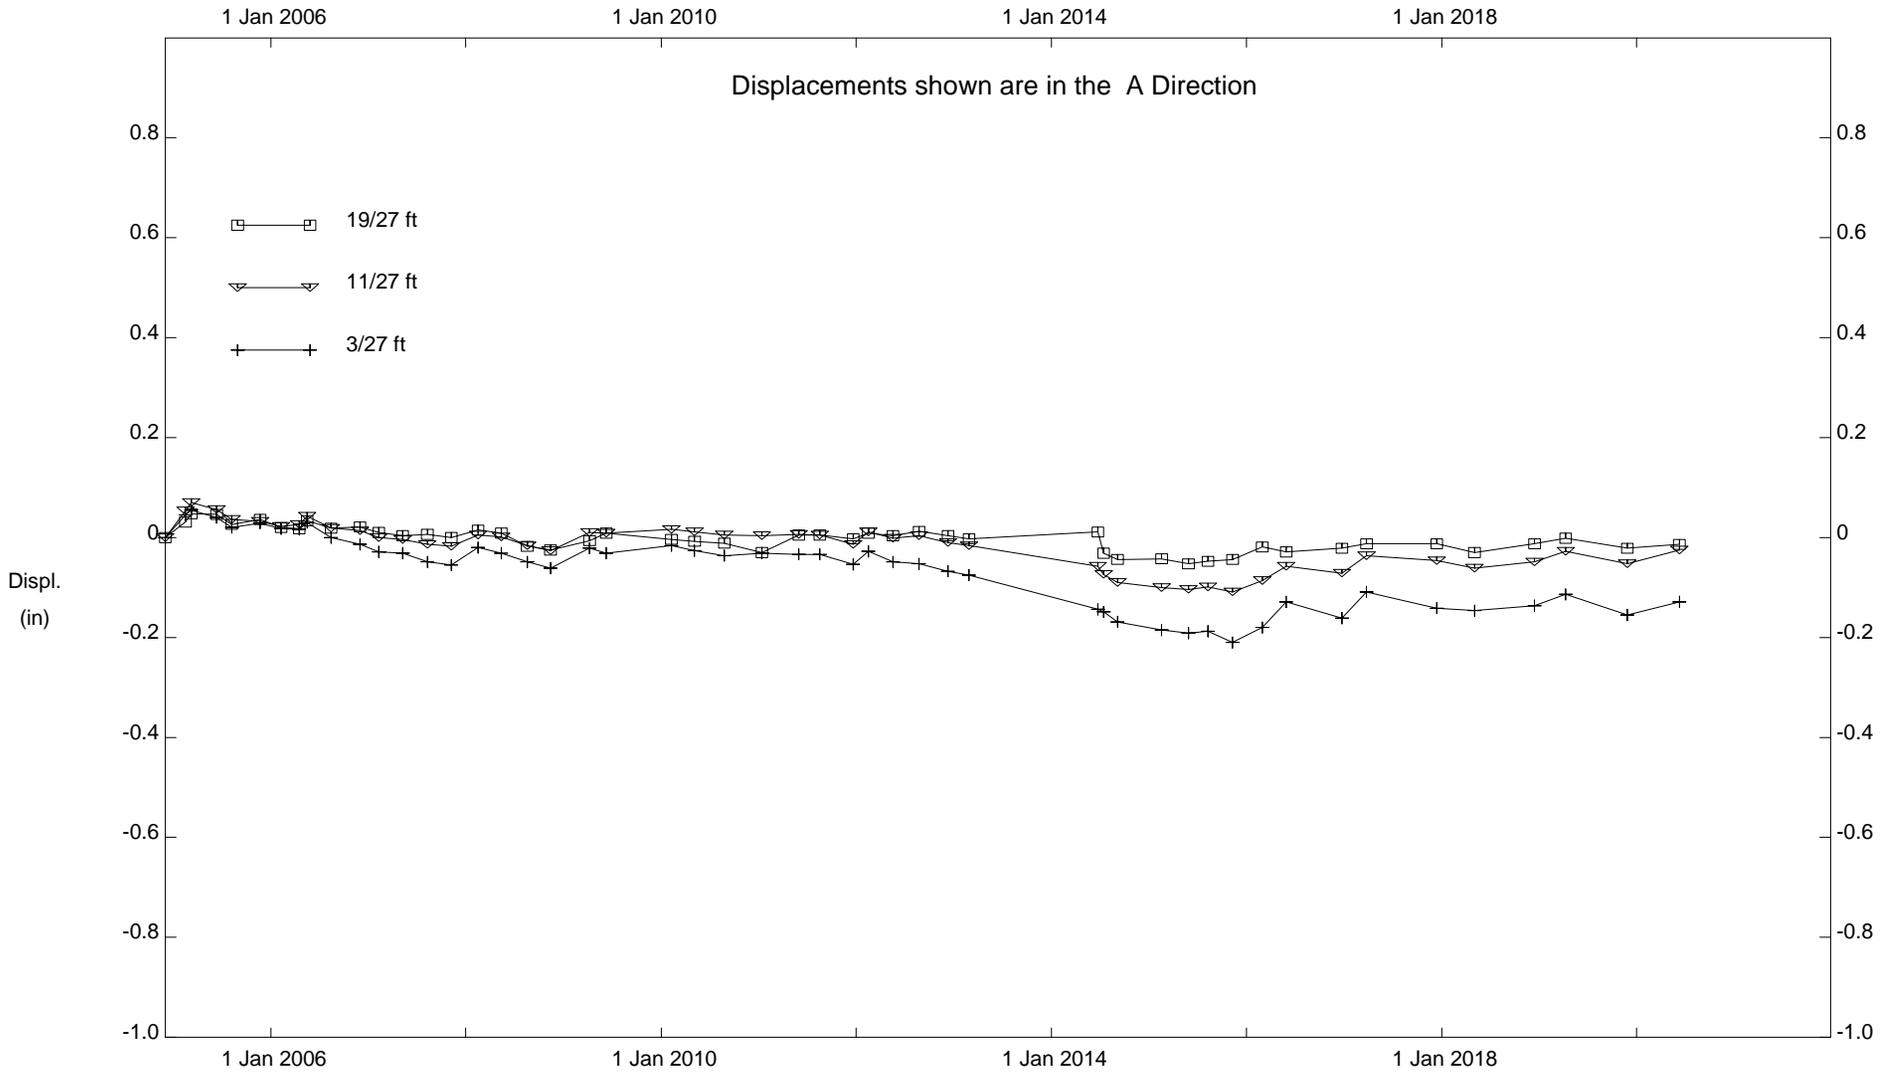

Assessment District 98-2, Inclinator SI-12

City of Malibu


Fugro West, Inc. - Ventura, CA

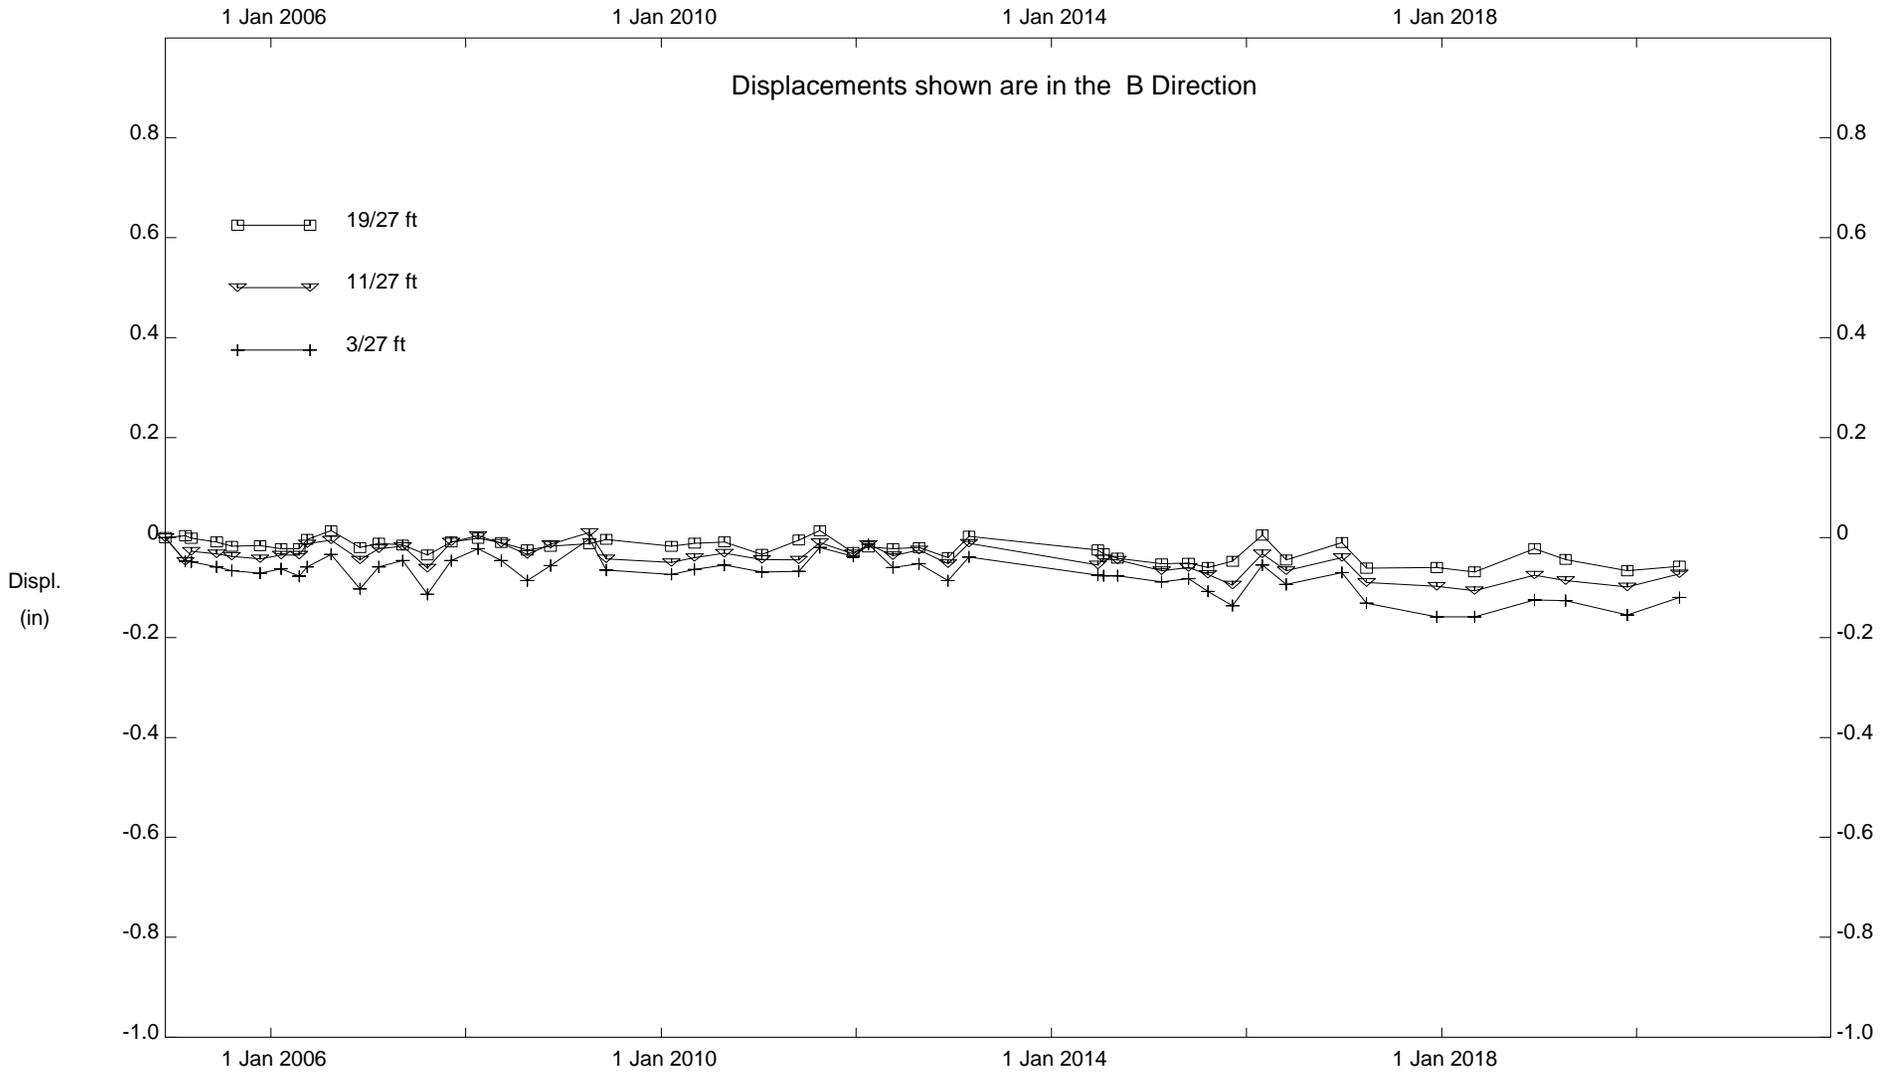

Assessment District 98-2, Inclinator SI-12

City of Malibu


Fugro West, Inc. - Ventura, CA

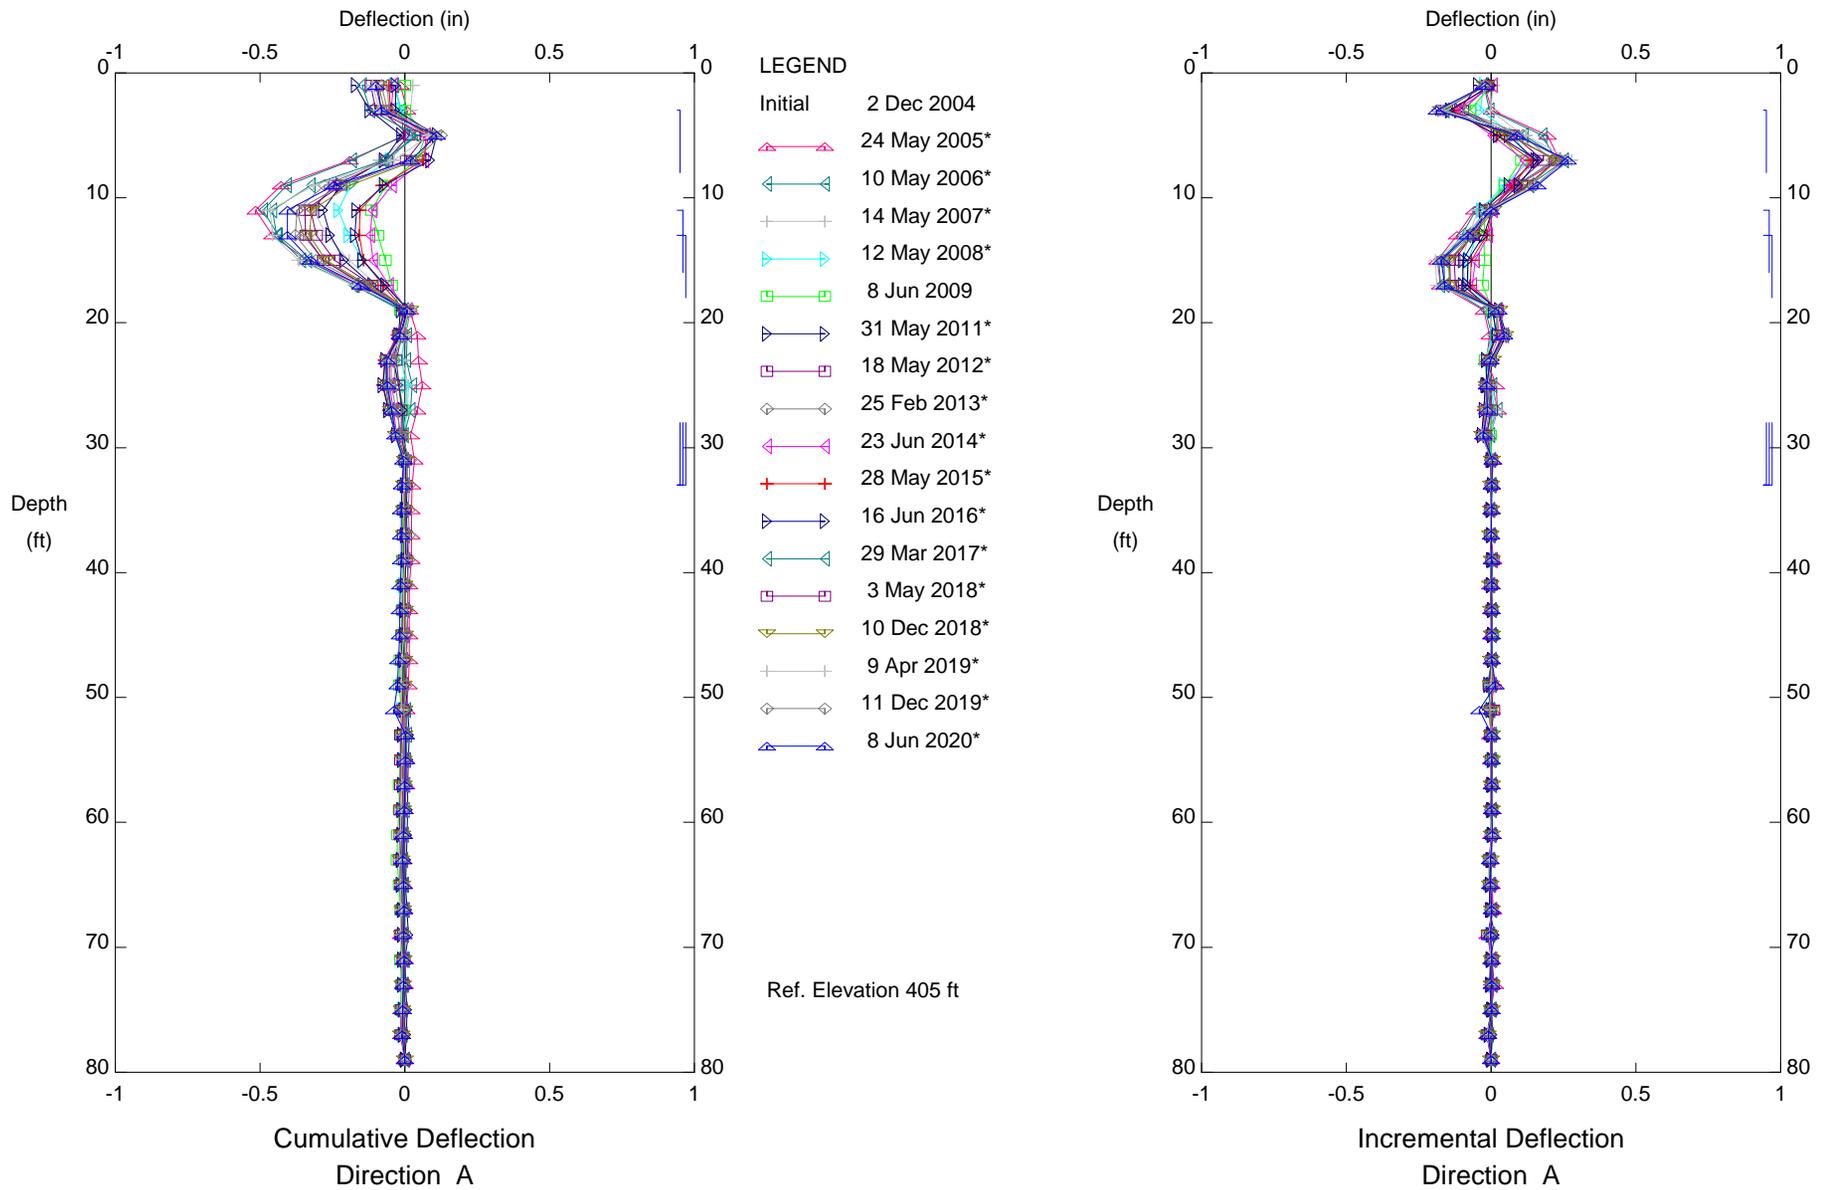

Assessment District 98-2, Inclinometer SI-13
 City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

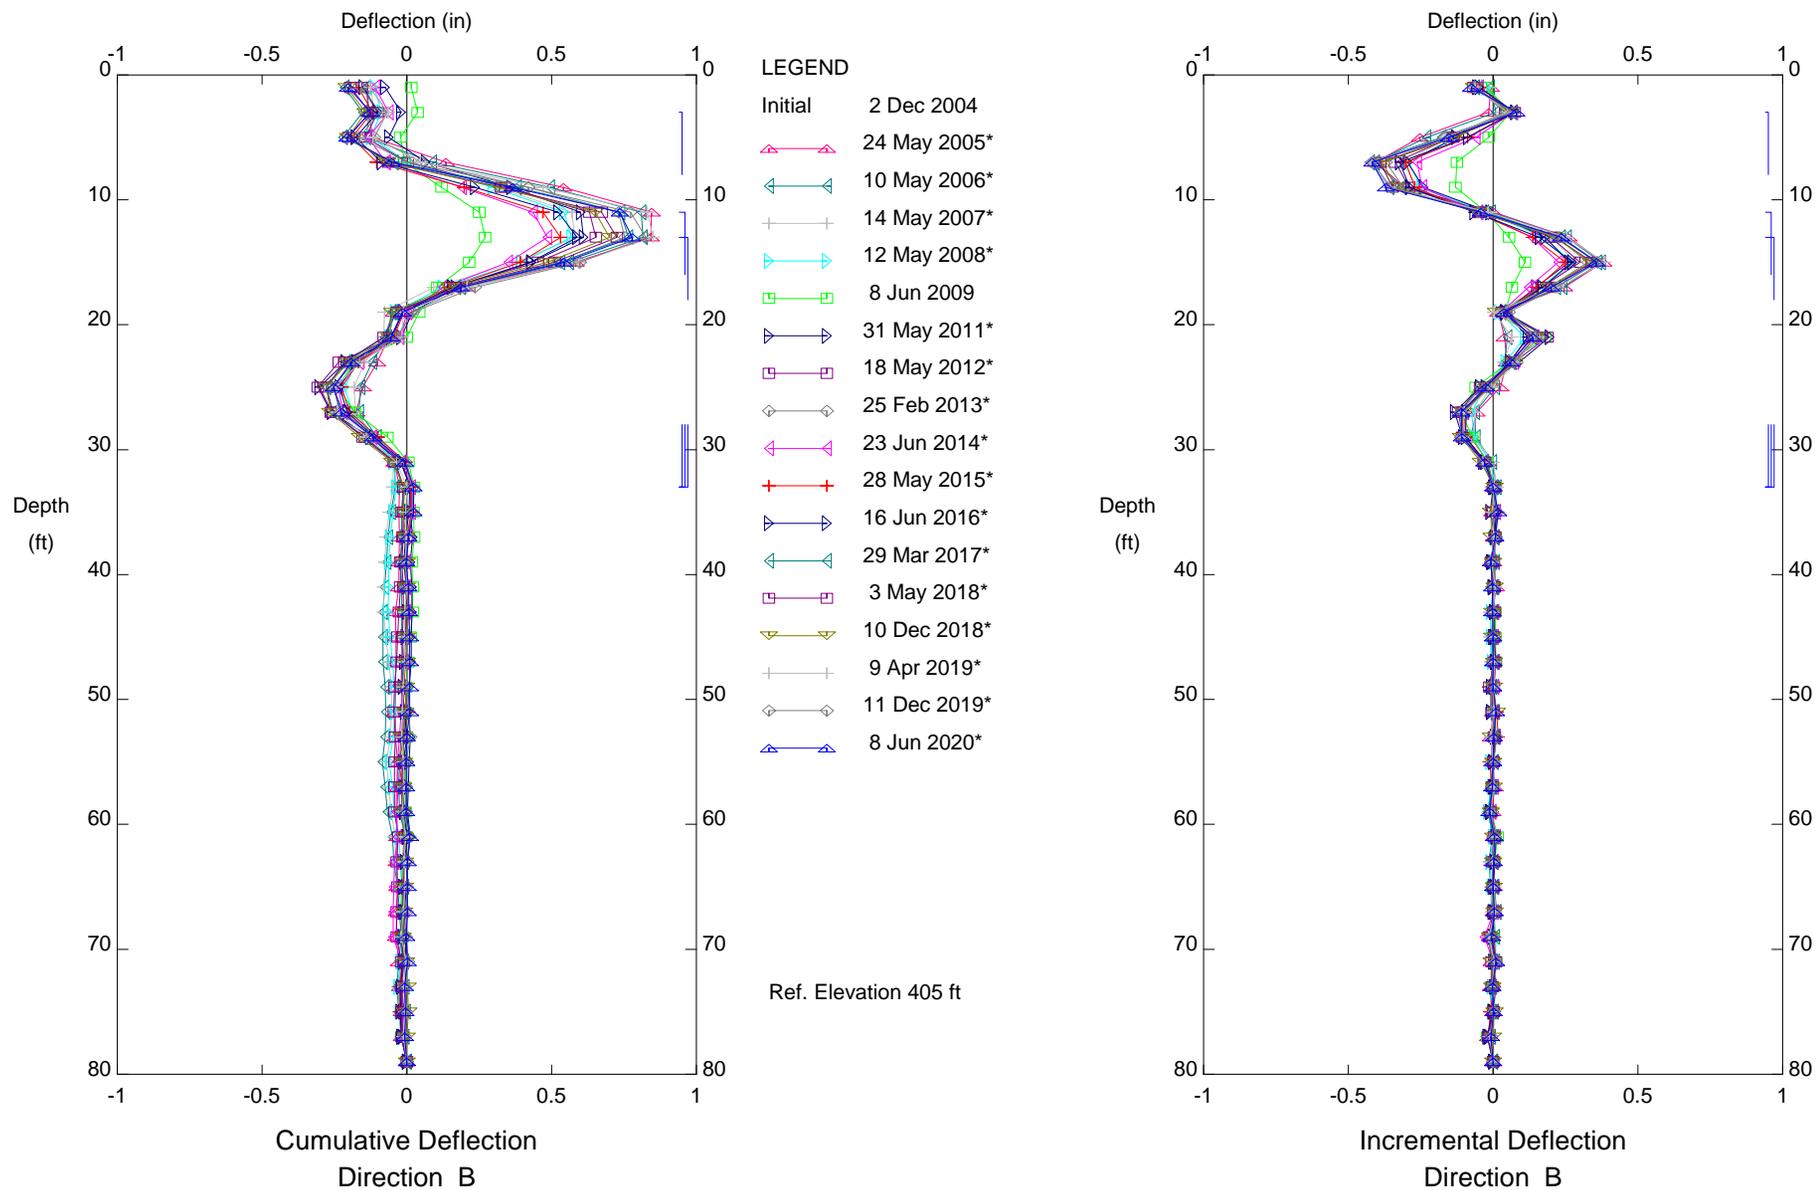

Assessment District 98-2, Inclinometer SI-13
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

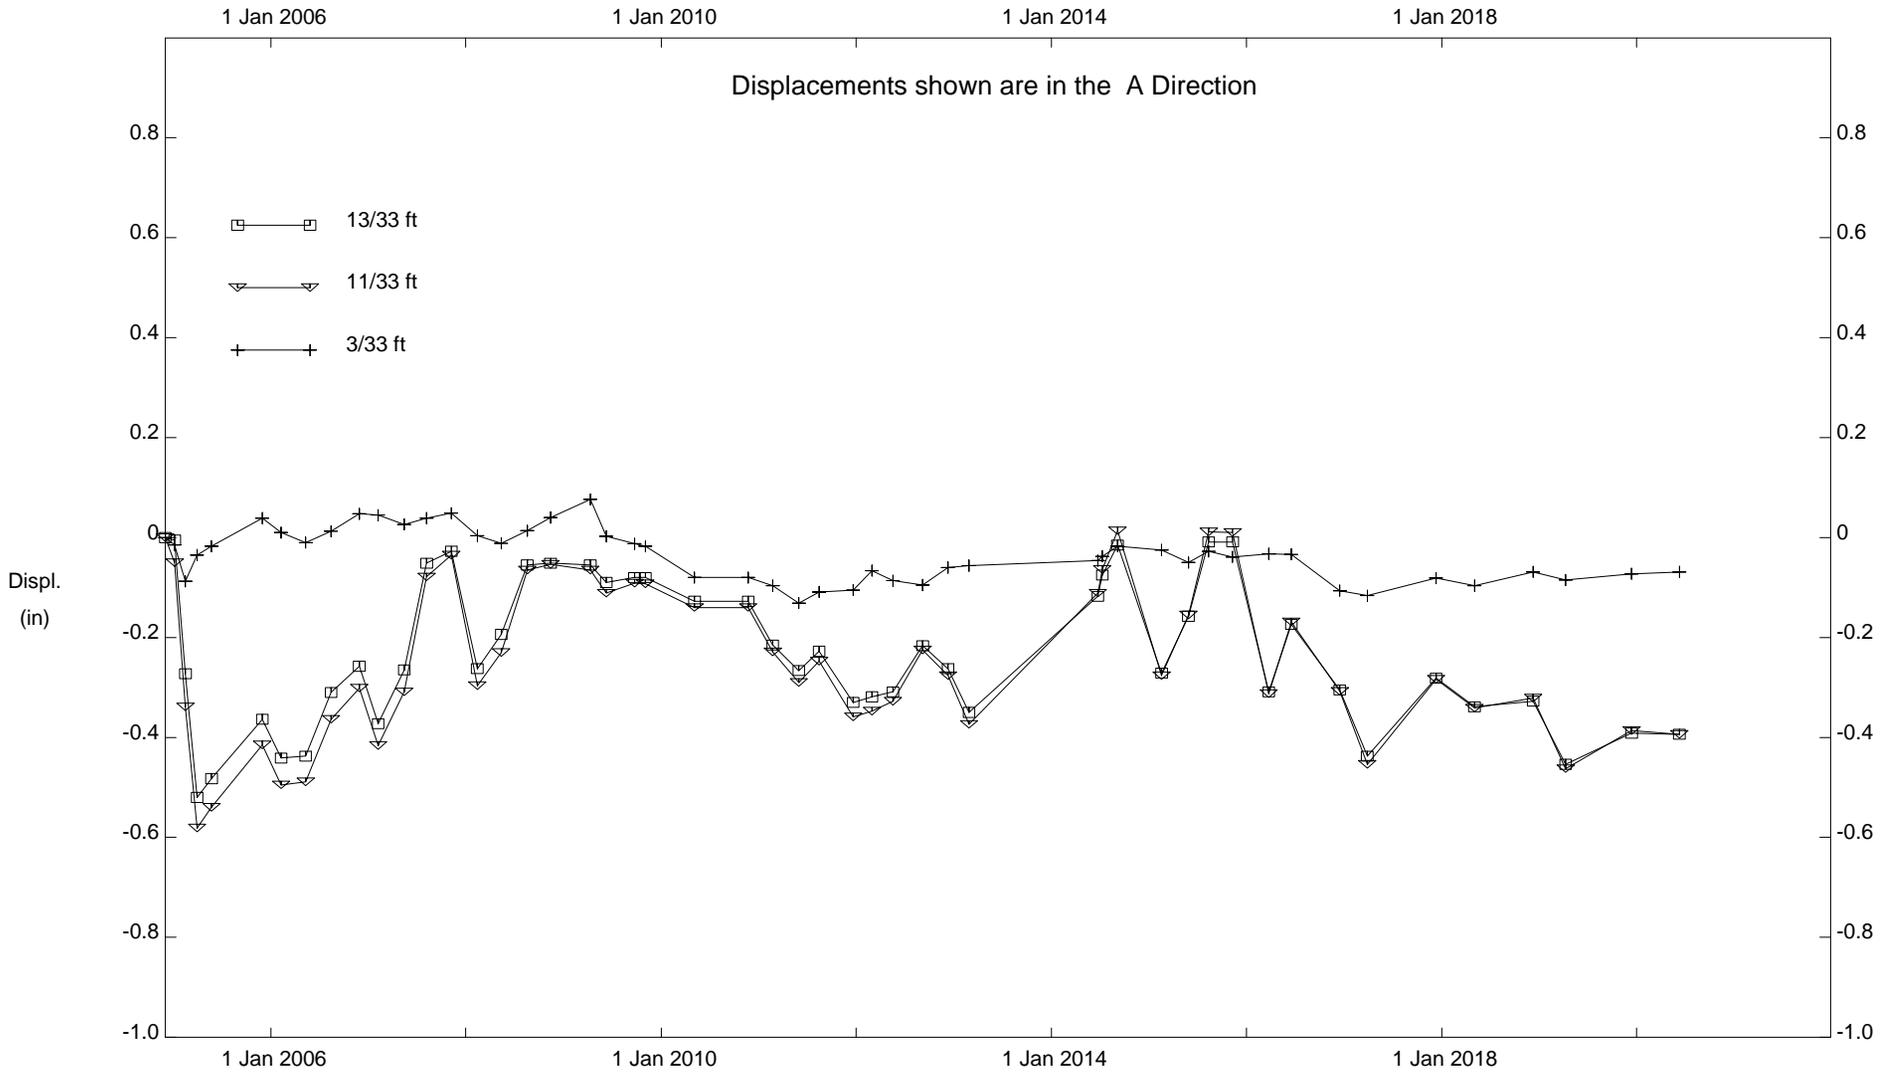

Assessment District 98-2, Inclinometer SI-13

City of Malibu


Fugro West, Inc. - Ventura, CA

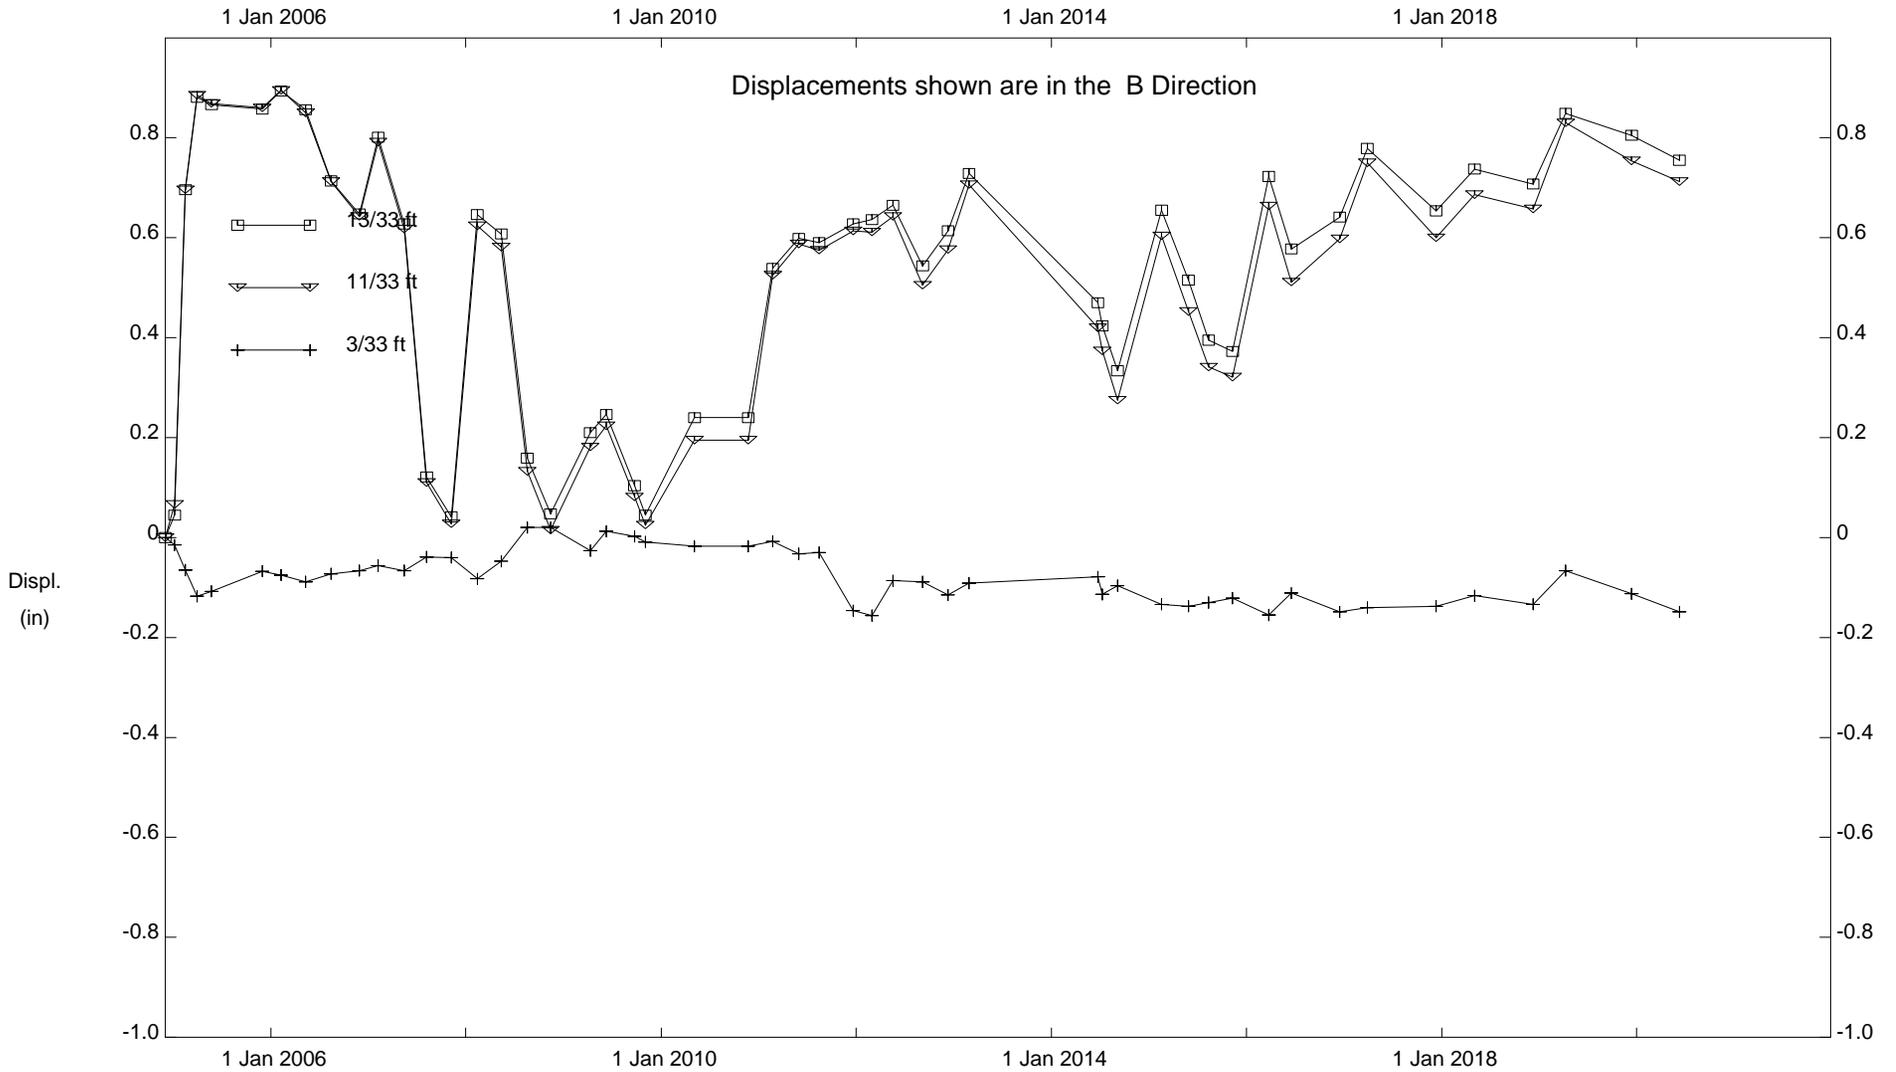

Assessment District 98-2, Inclinator SI-13

City of Malibu


Fugro West, Inc. - Ventura, CA

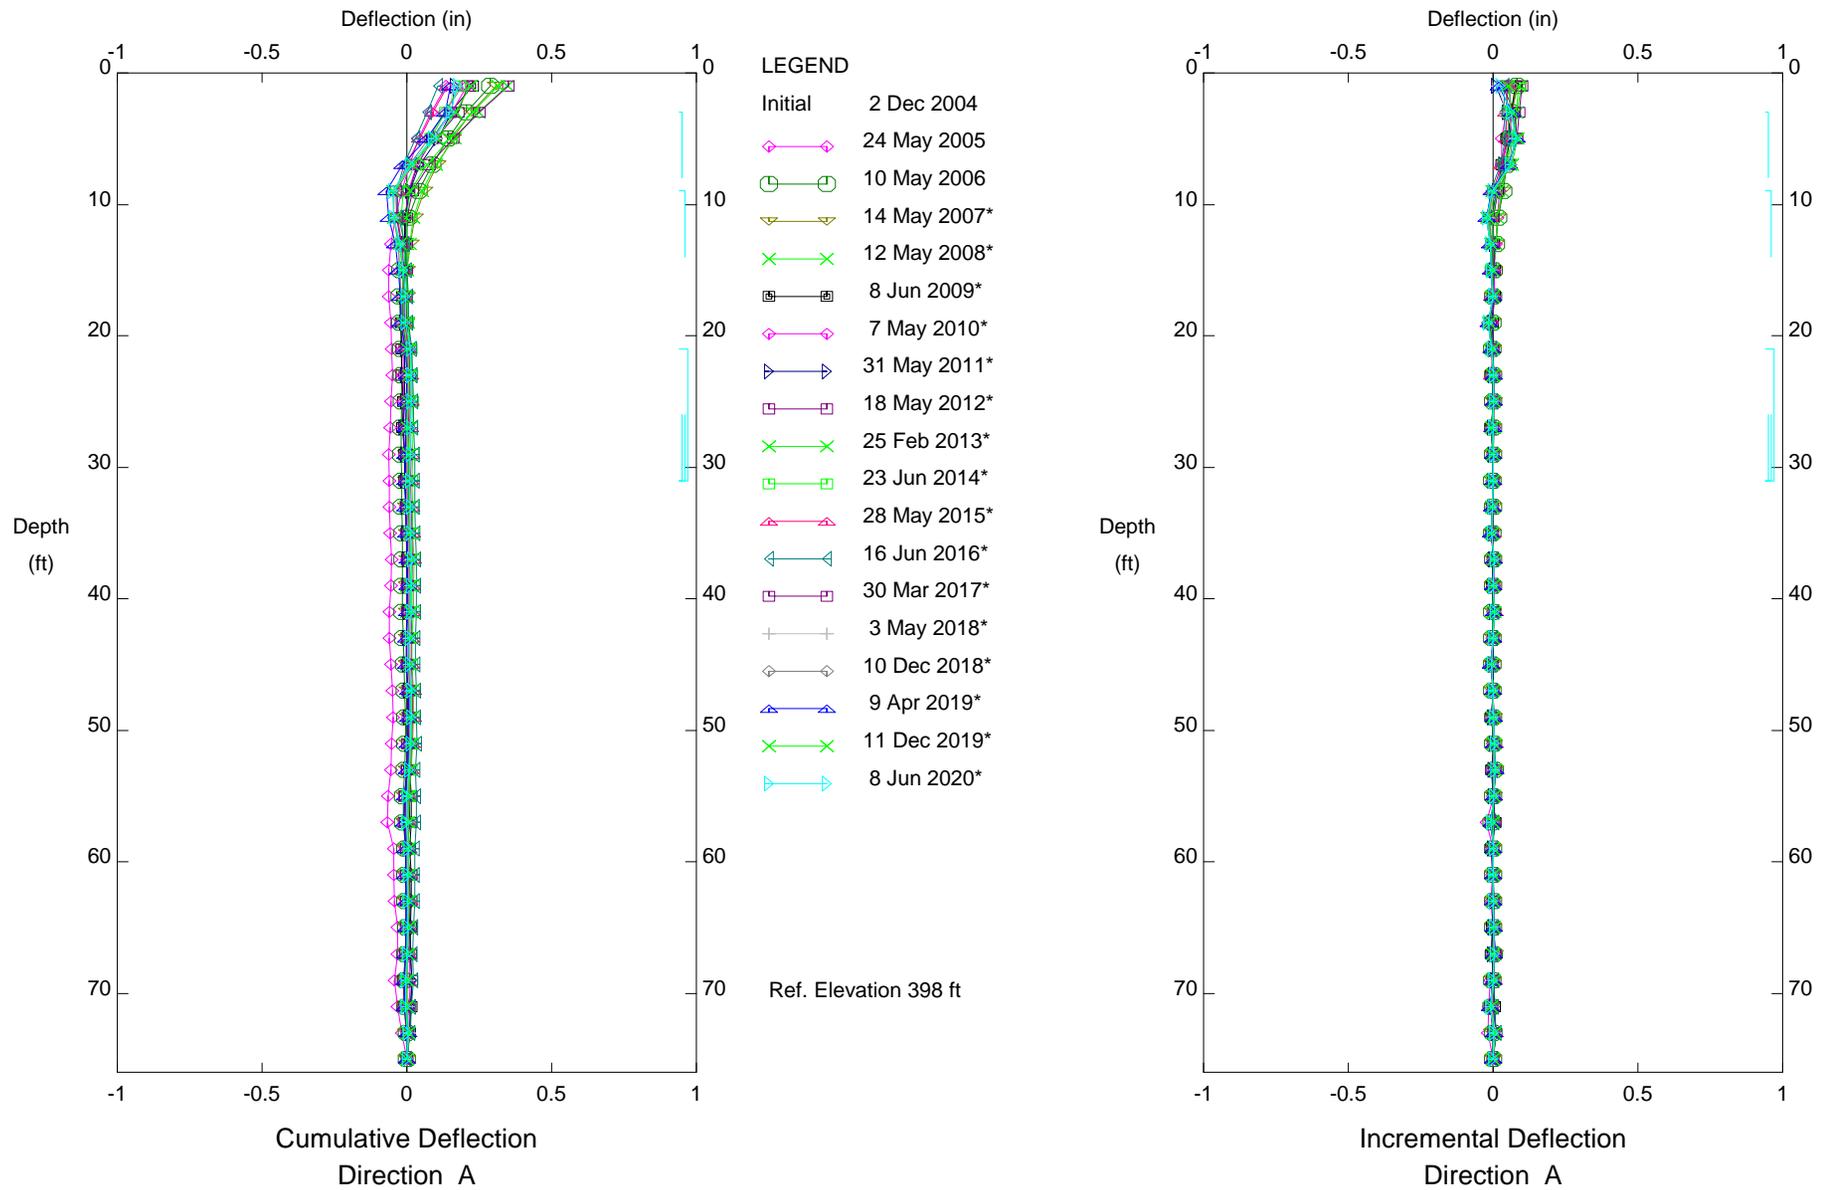

Assessment District 98-2, Inclinometer SI-14
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

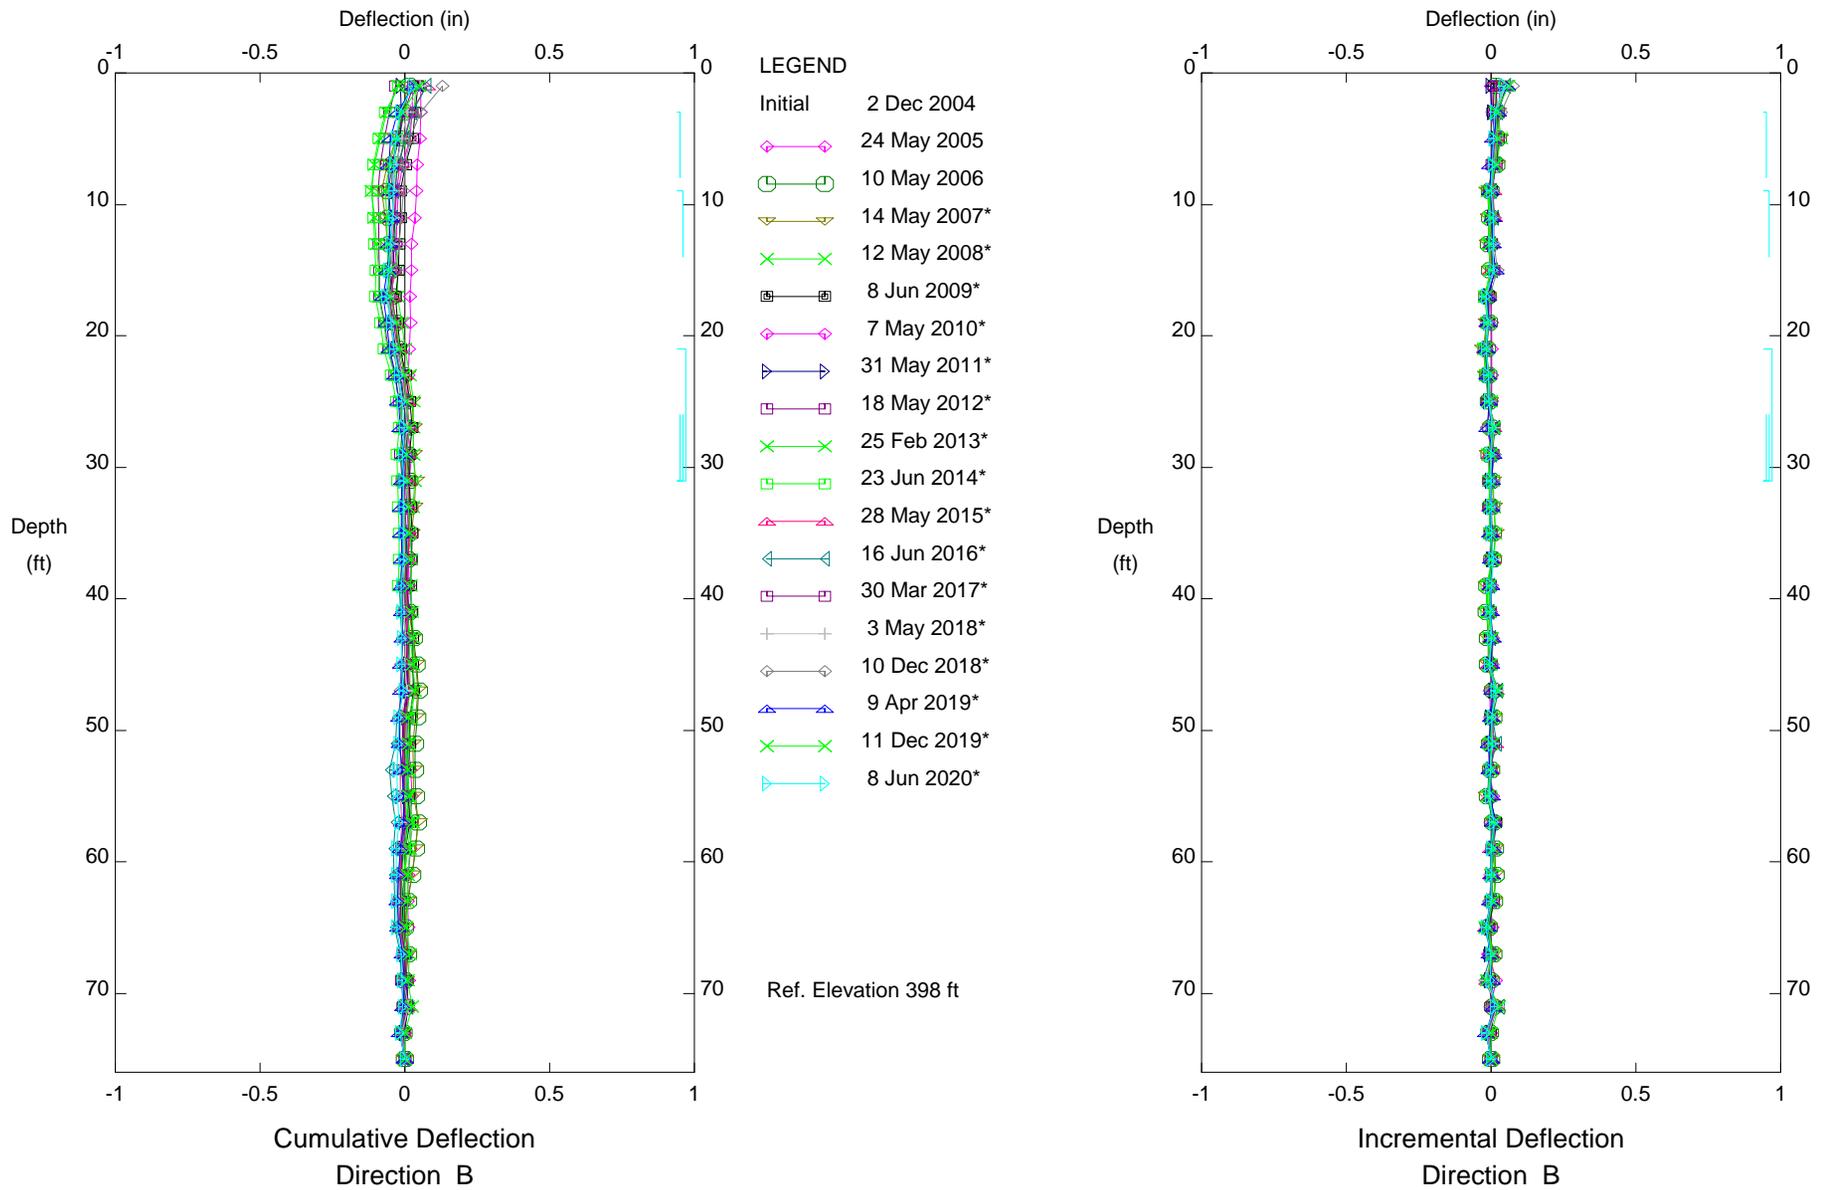

Assessment District 98-2, Inclinometer SI-14
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

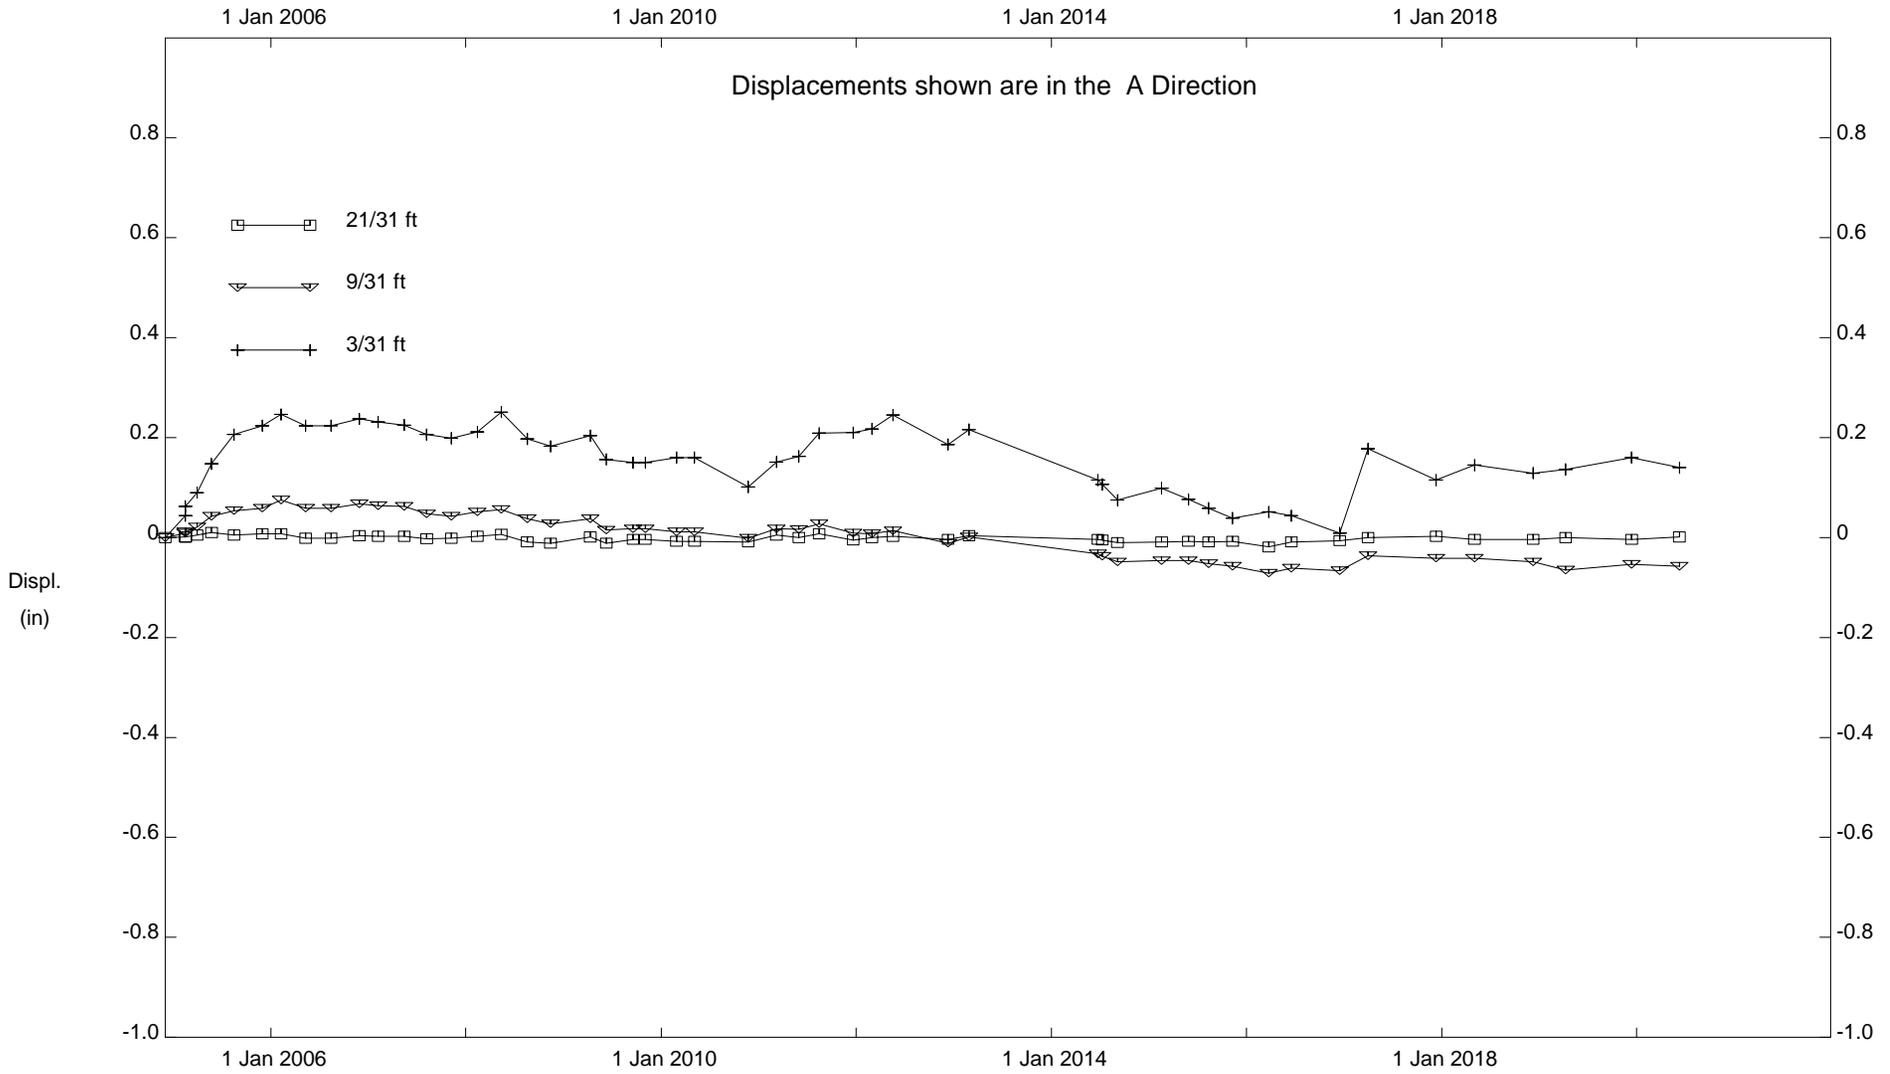

Assessment District 98-2, Inclinator SI-14

City of Malibu


Fugro West, Inc. - Ventura, CA

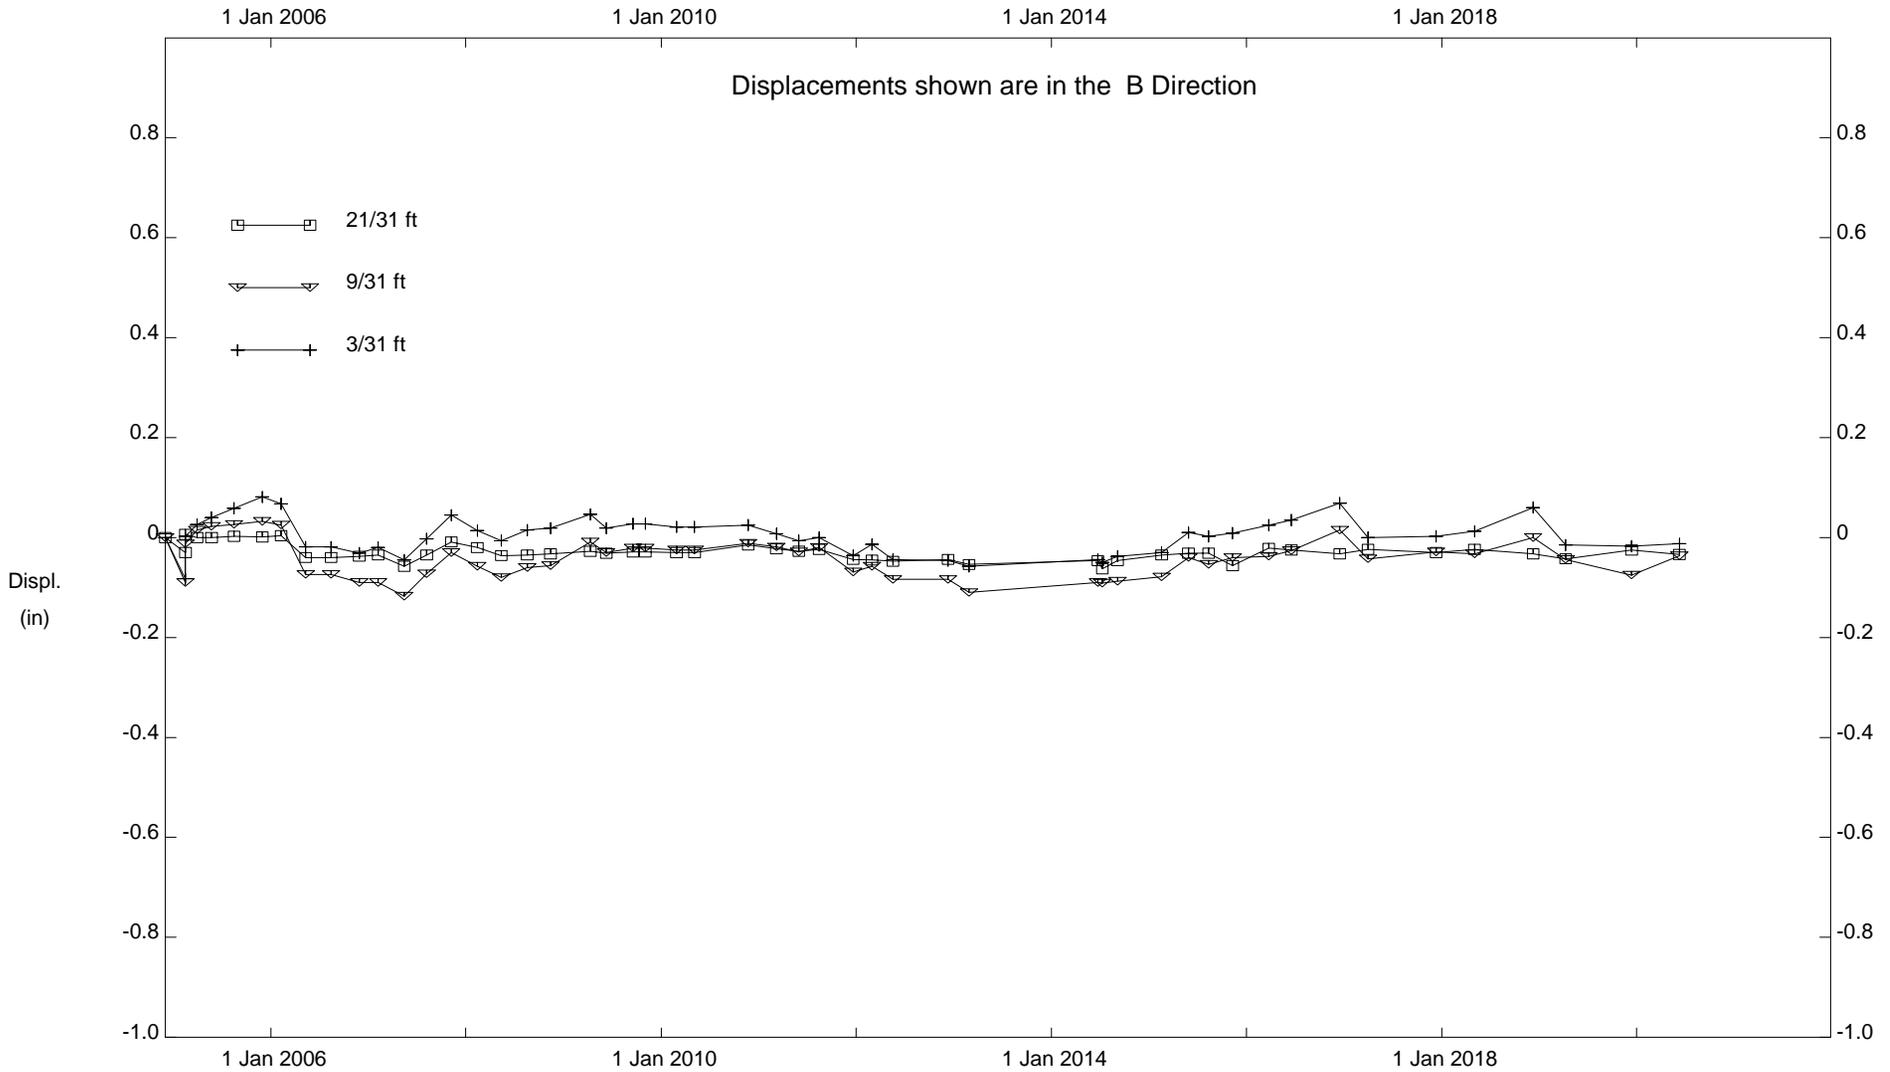

Assessment District 98-2, Inclinator SI-14

City of Malibu

Fugro West, Inc. - Ventura, CA

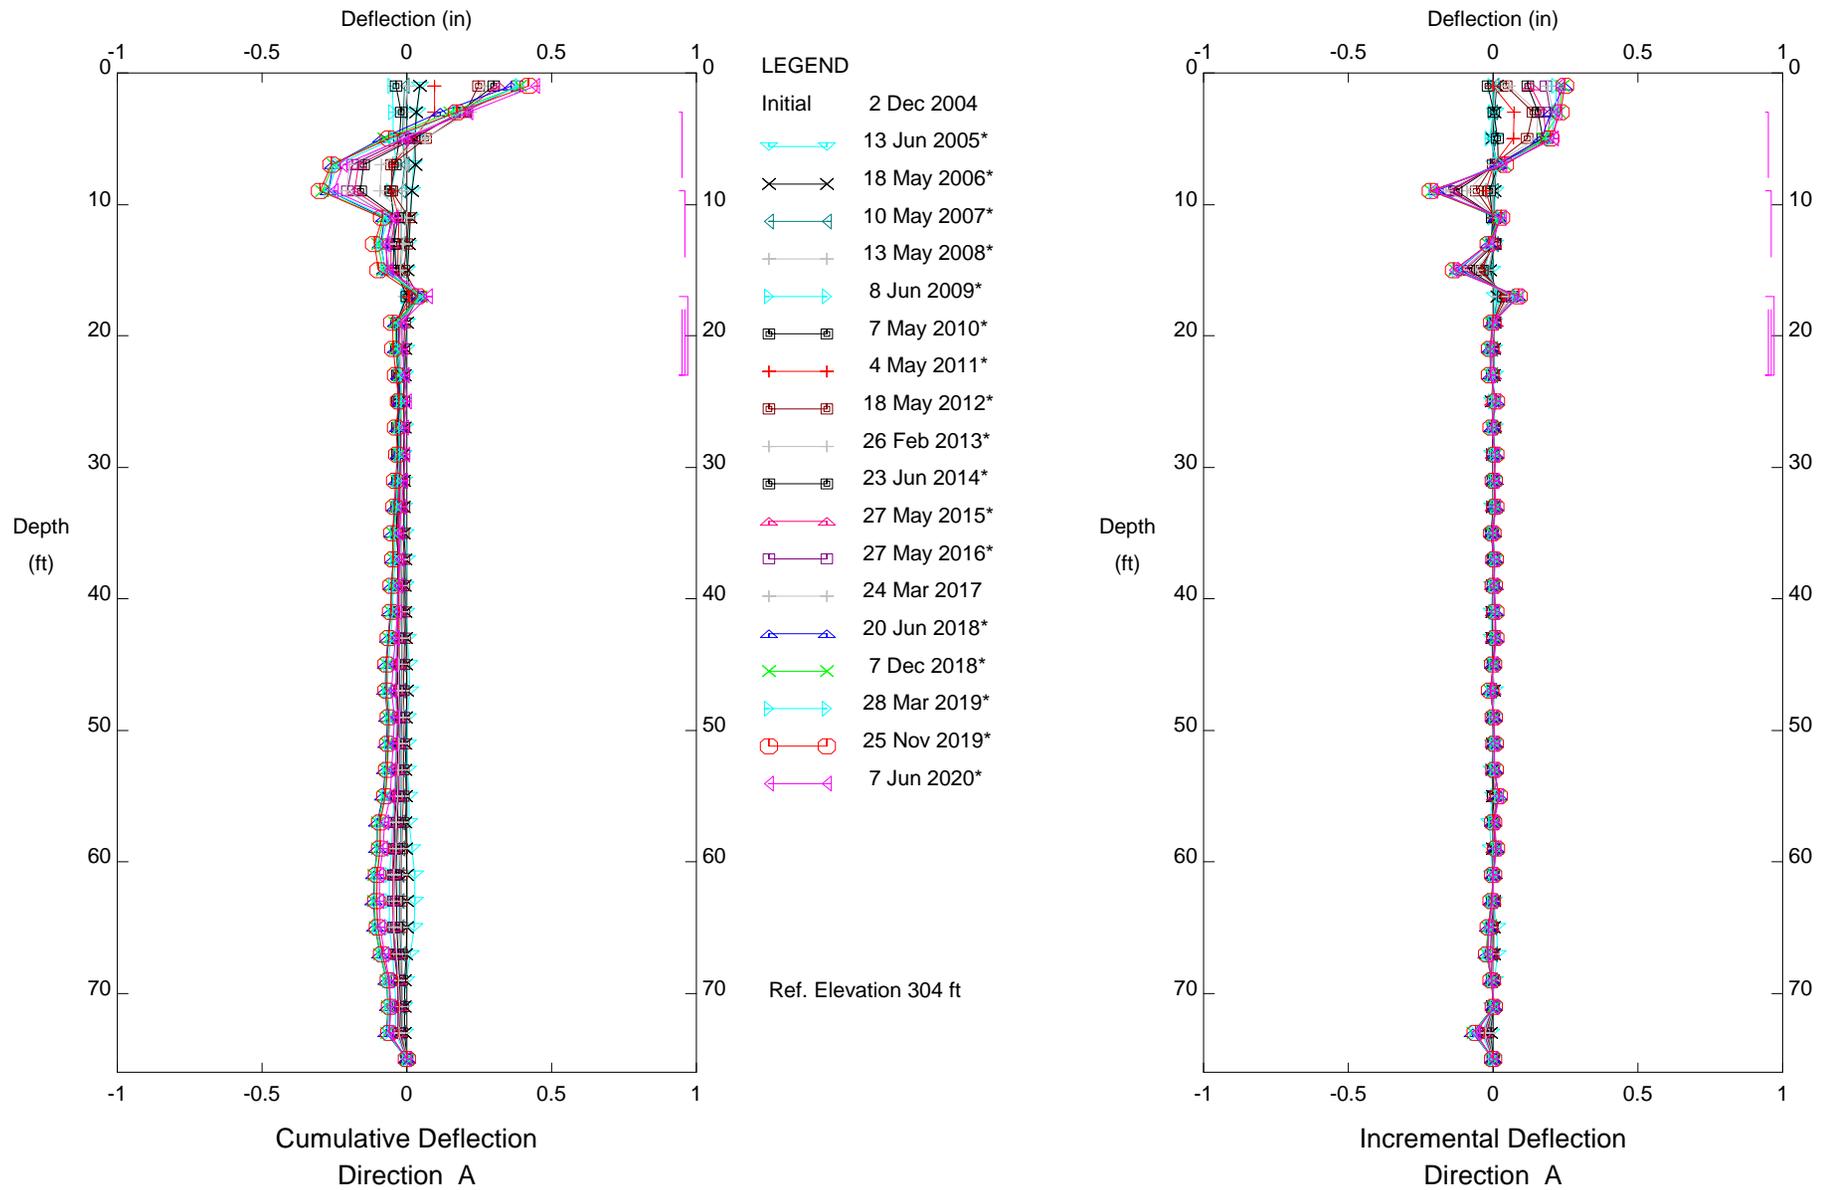


CALLE DEL BARCO, Inclinator SI-15

Depth of readings = 72 ft

Sets marked * include zero shift and/or rotation corrections.

Fugro West, Inc. - Ventura, CA

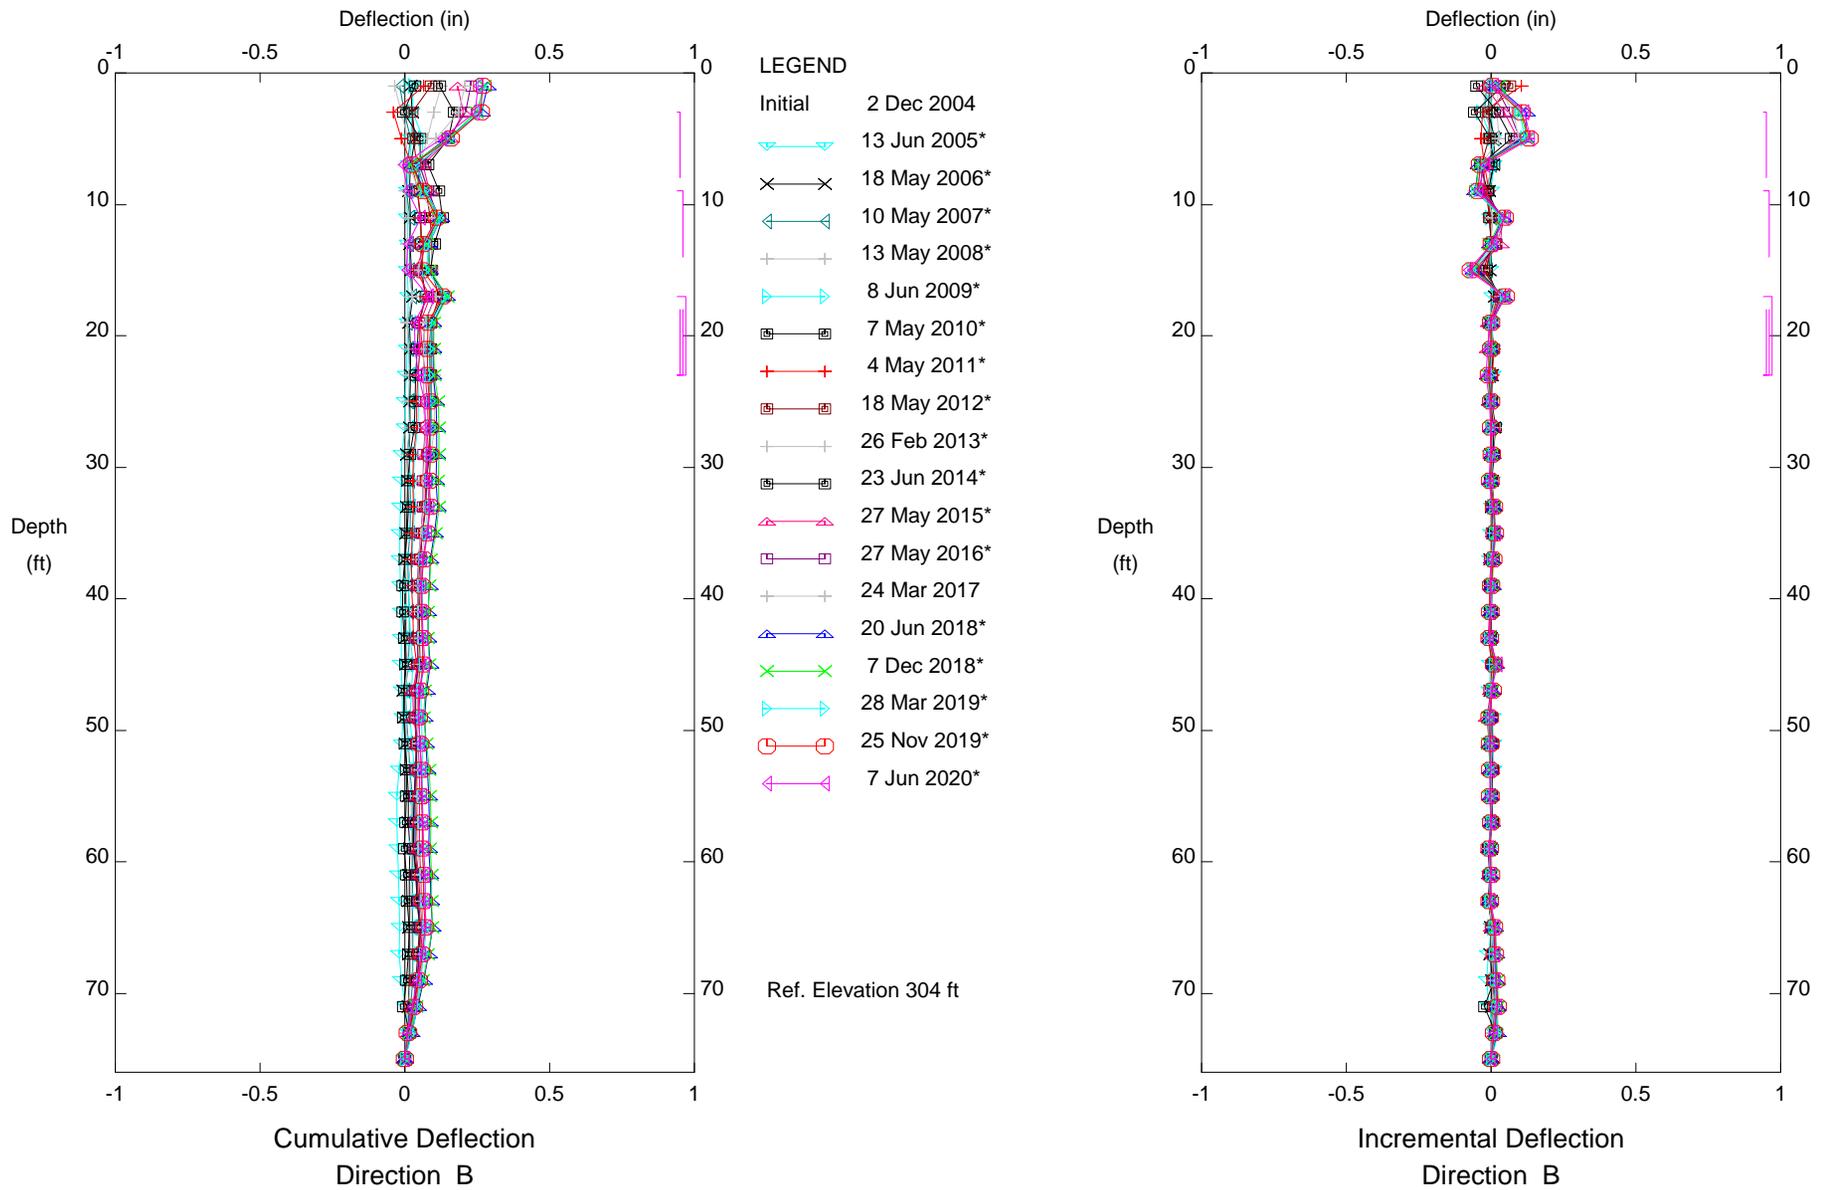


CALLE DEL BARCO, Inclinometer SI-15

Depth of readings = 72 ft

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

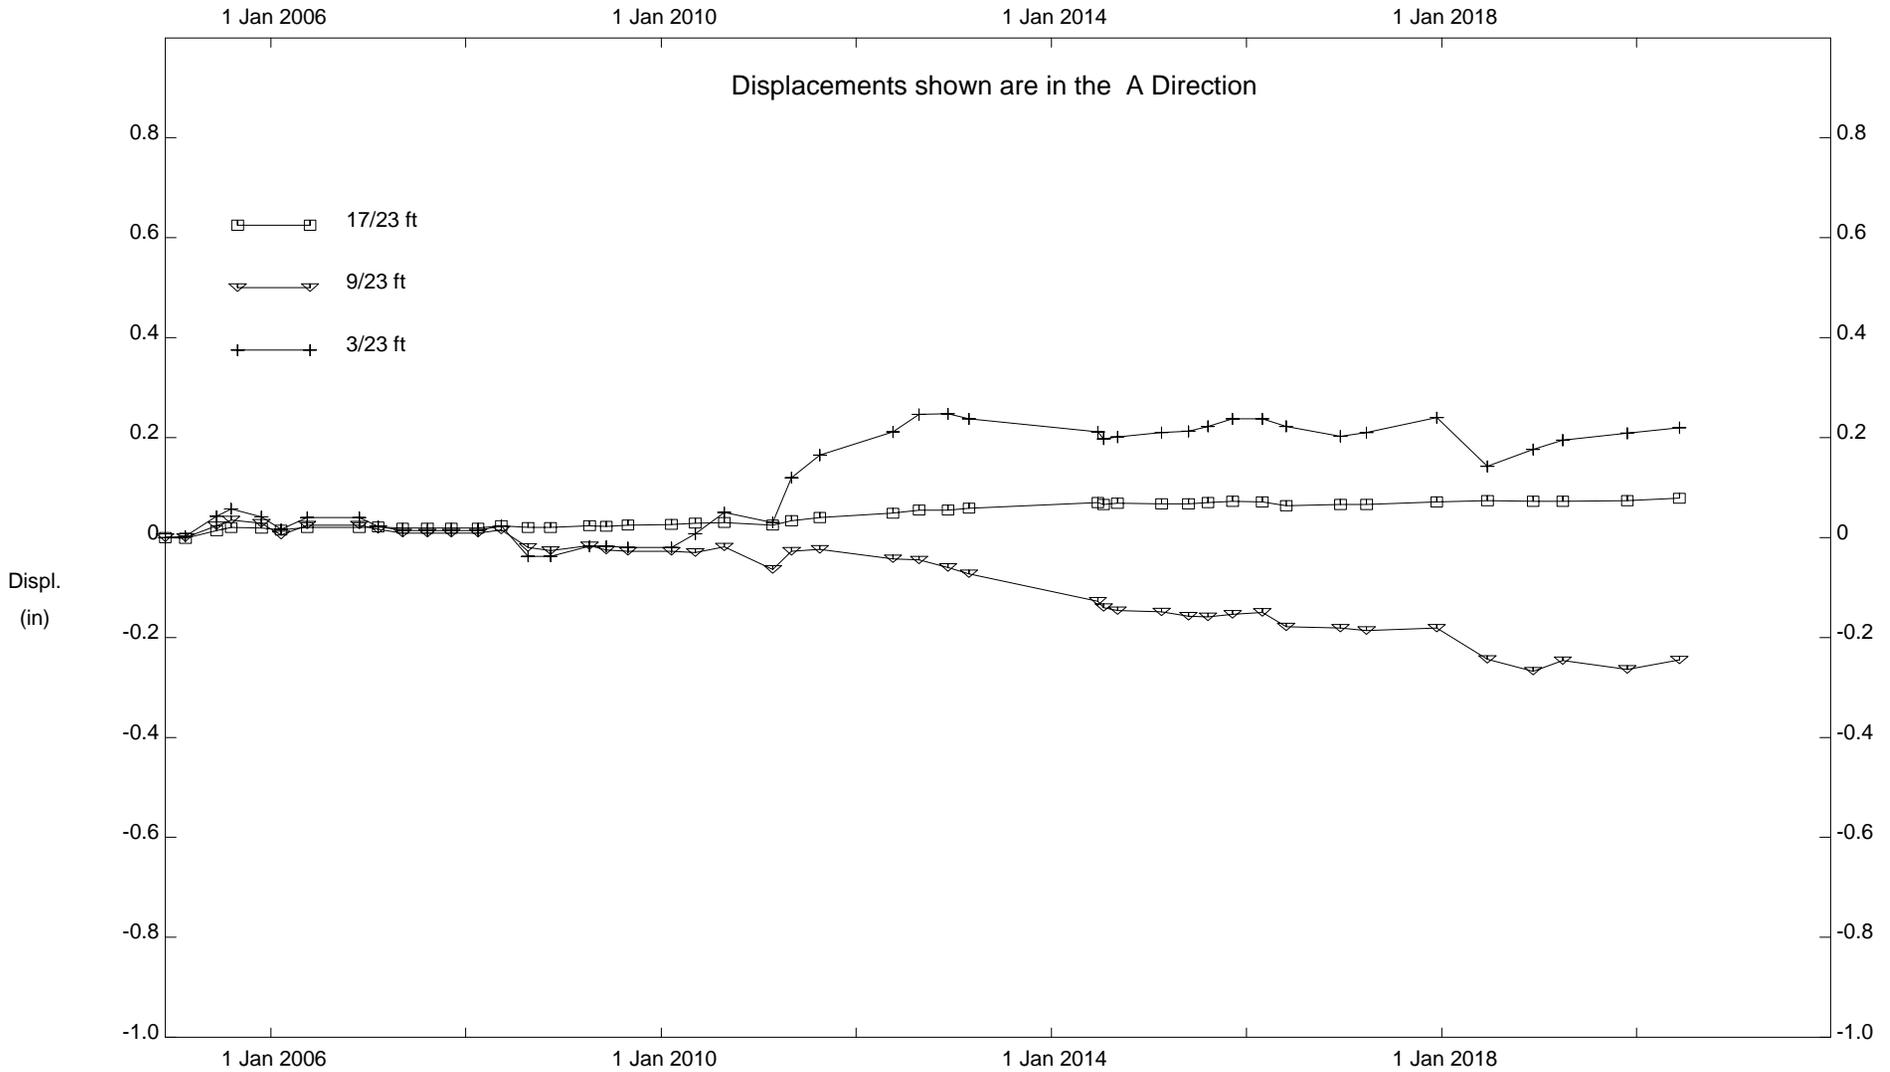

CALLE DEL BARCO, Inclinator SI-15

Depth of readings = 72 ft


Fugro West, Inc. - Ventura, CA

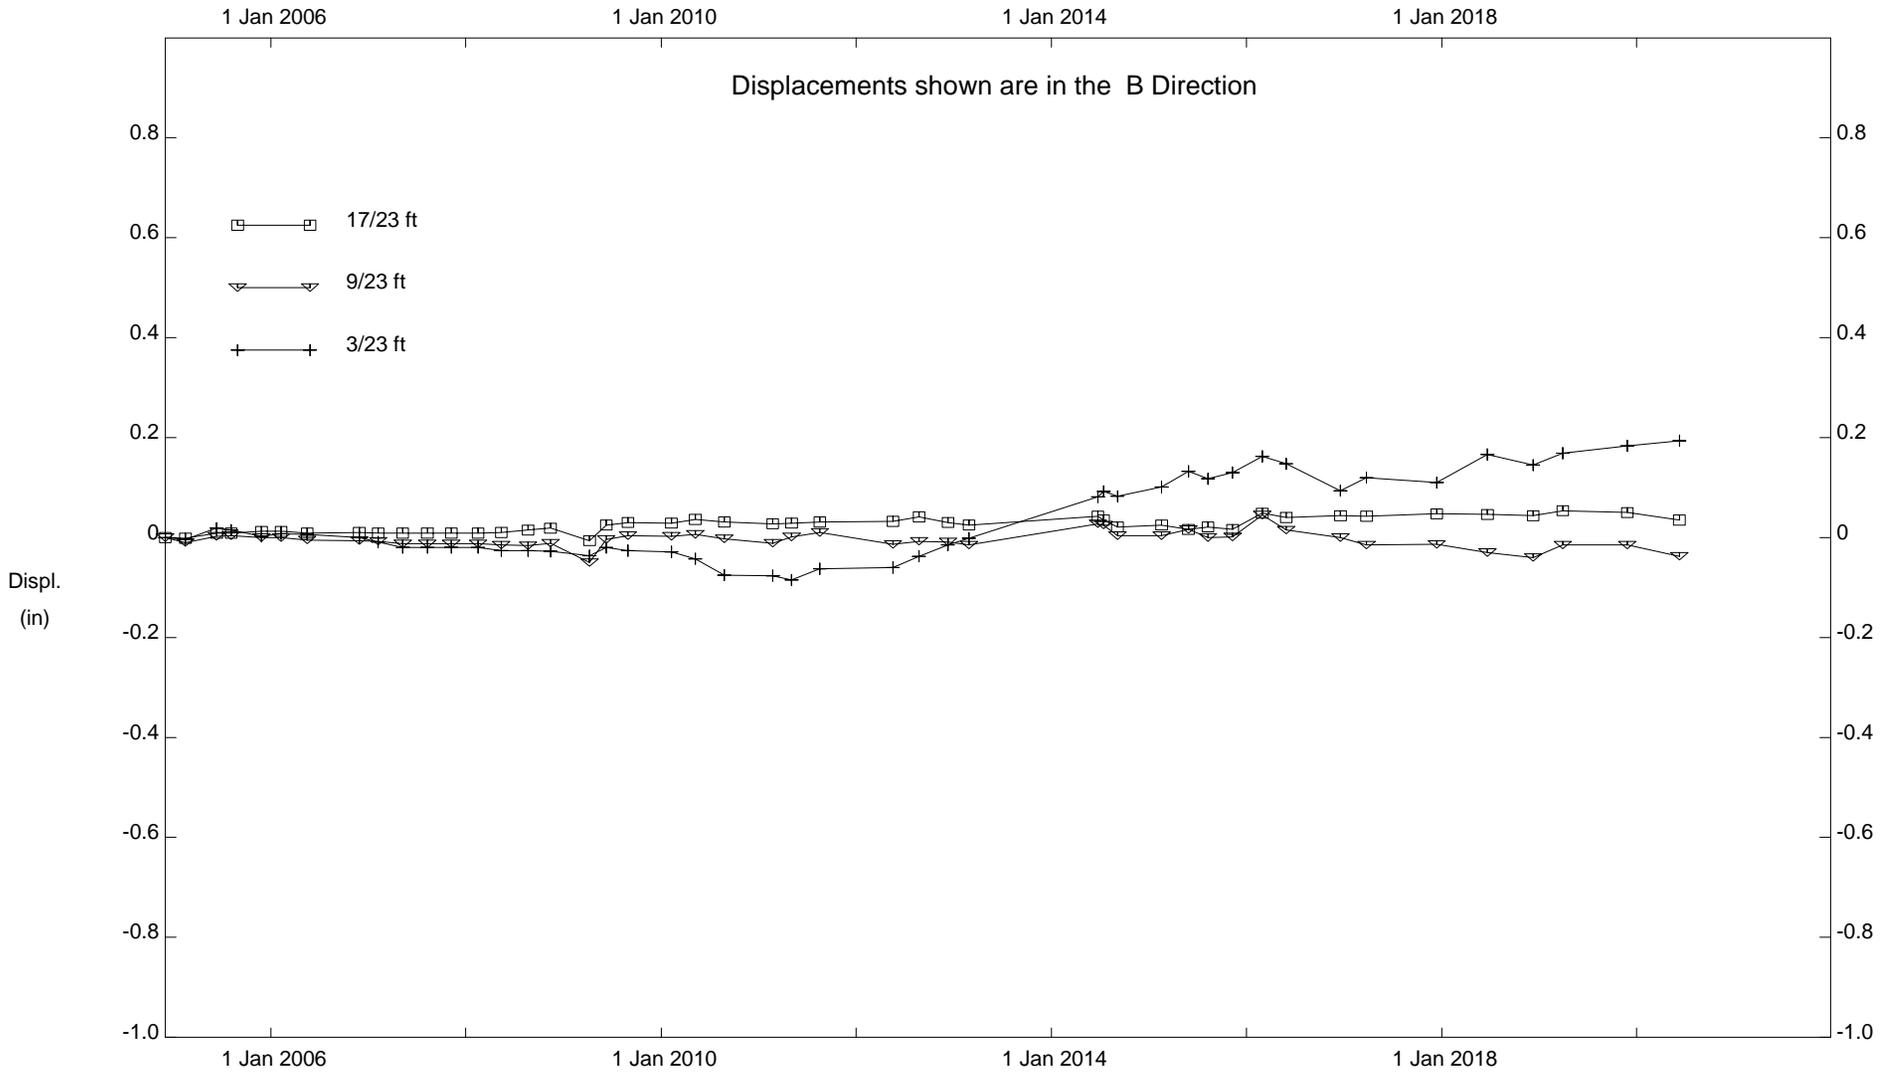

CALLE DEL BARCO, Inclinator SI-15

Depth of readings = 72 ft


Fugro West, Inc. - Ventura, CA

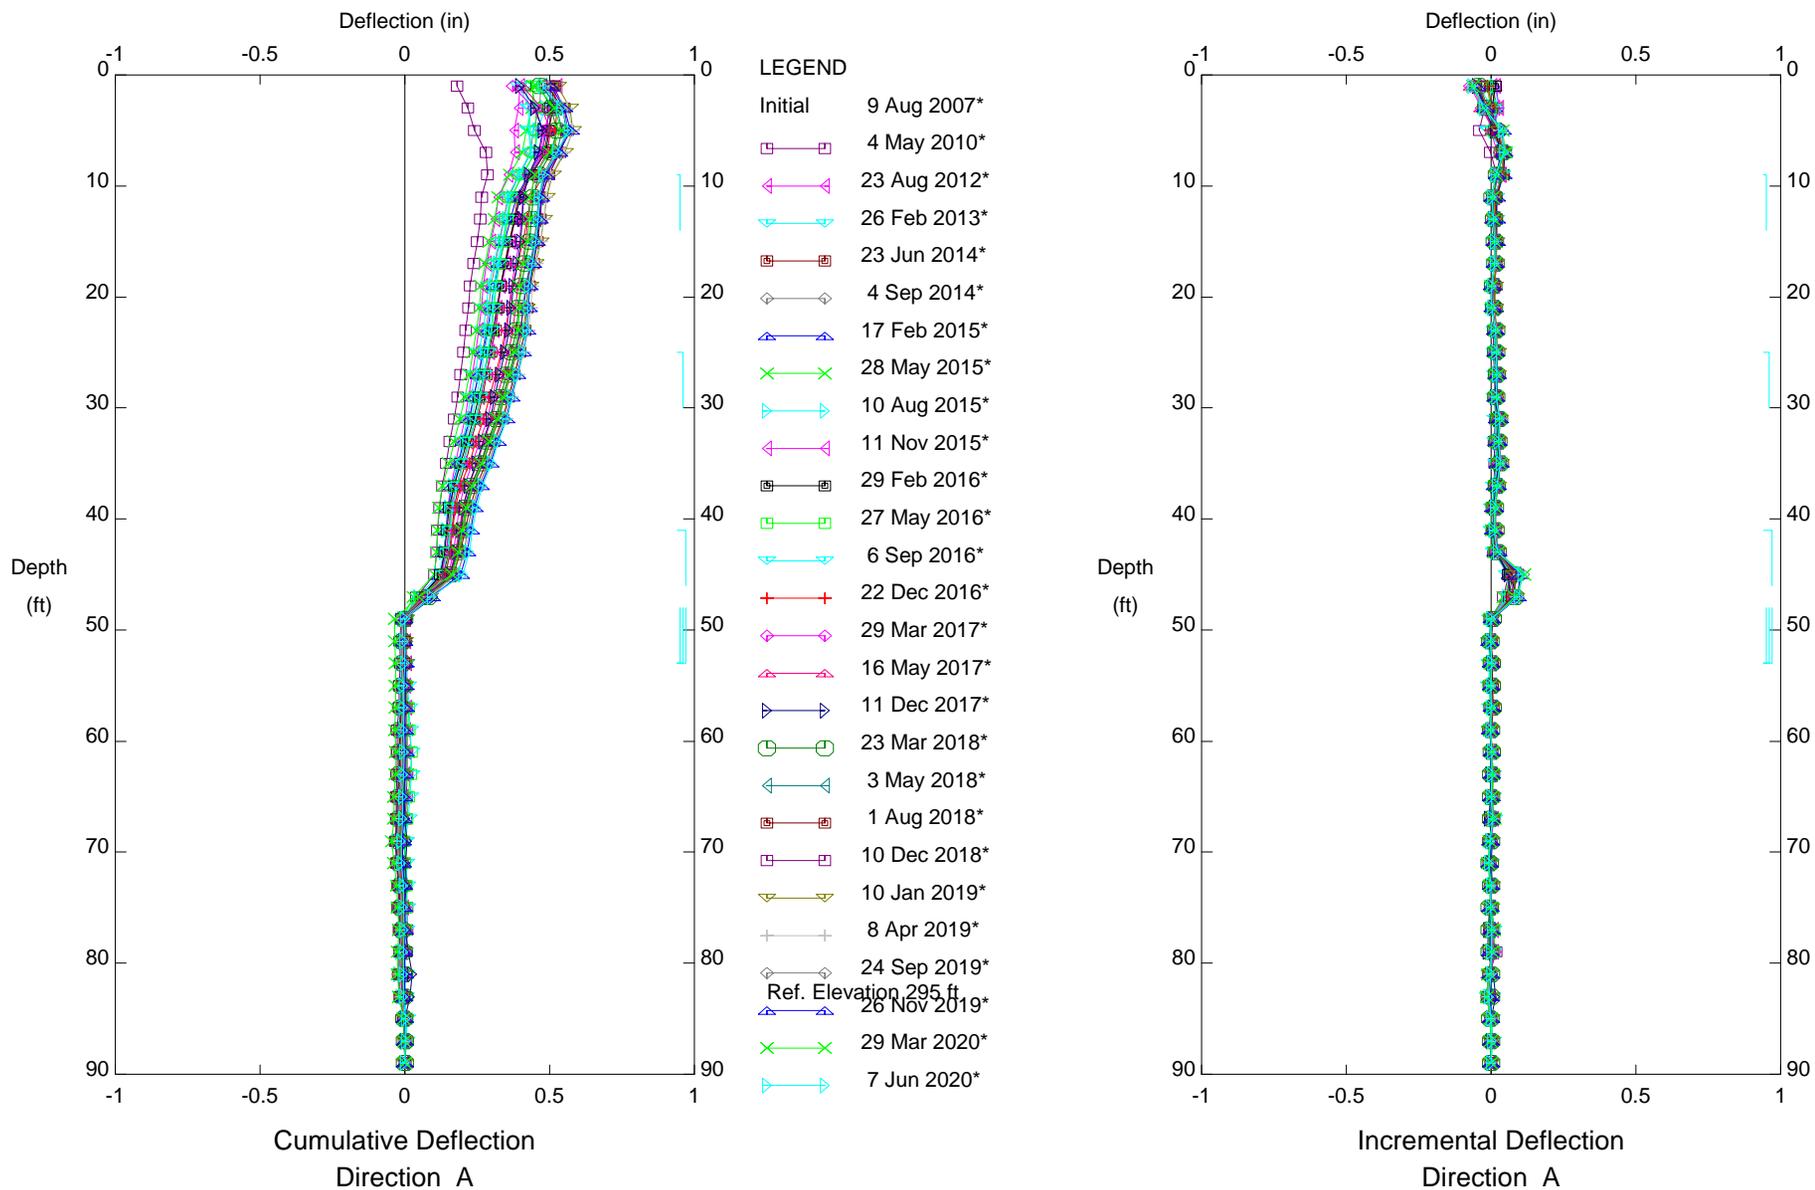

Assessment District 98-2, Inclinometer SI-16
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

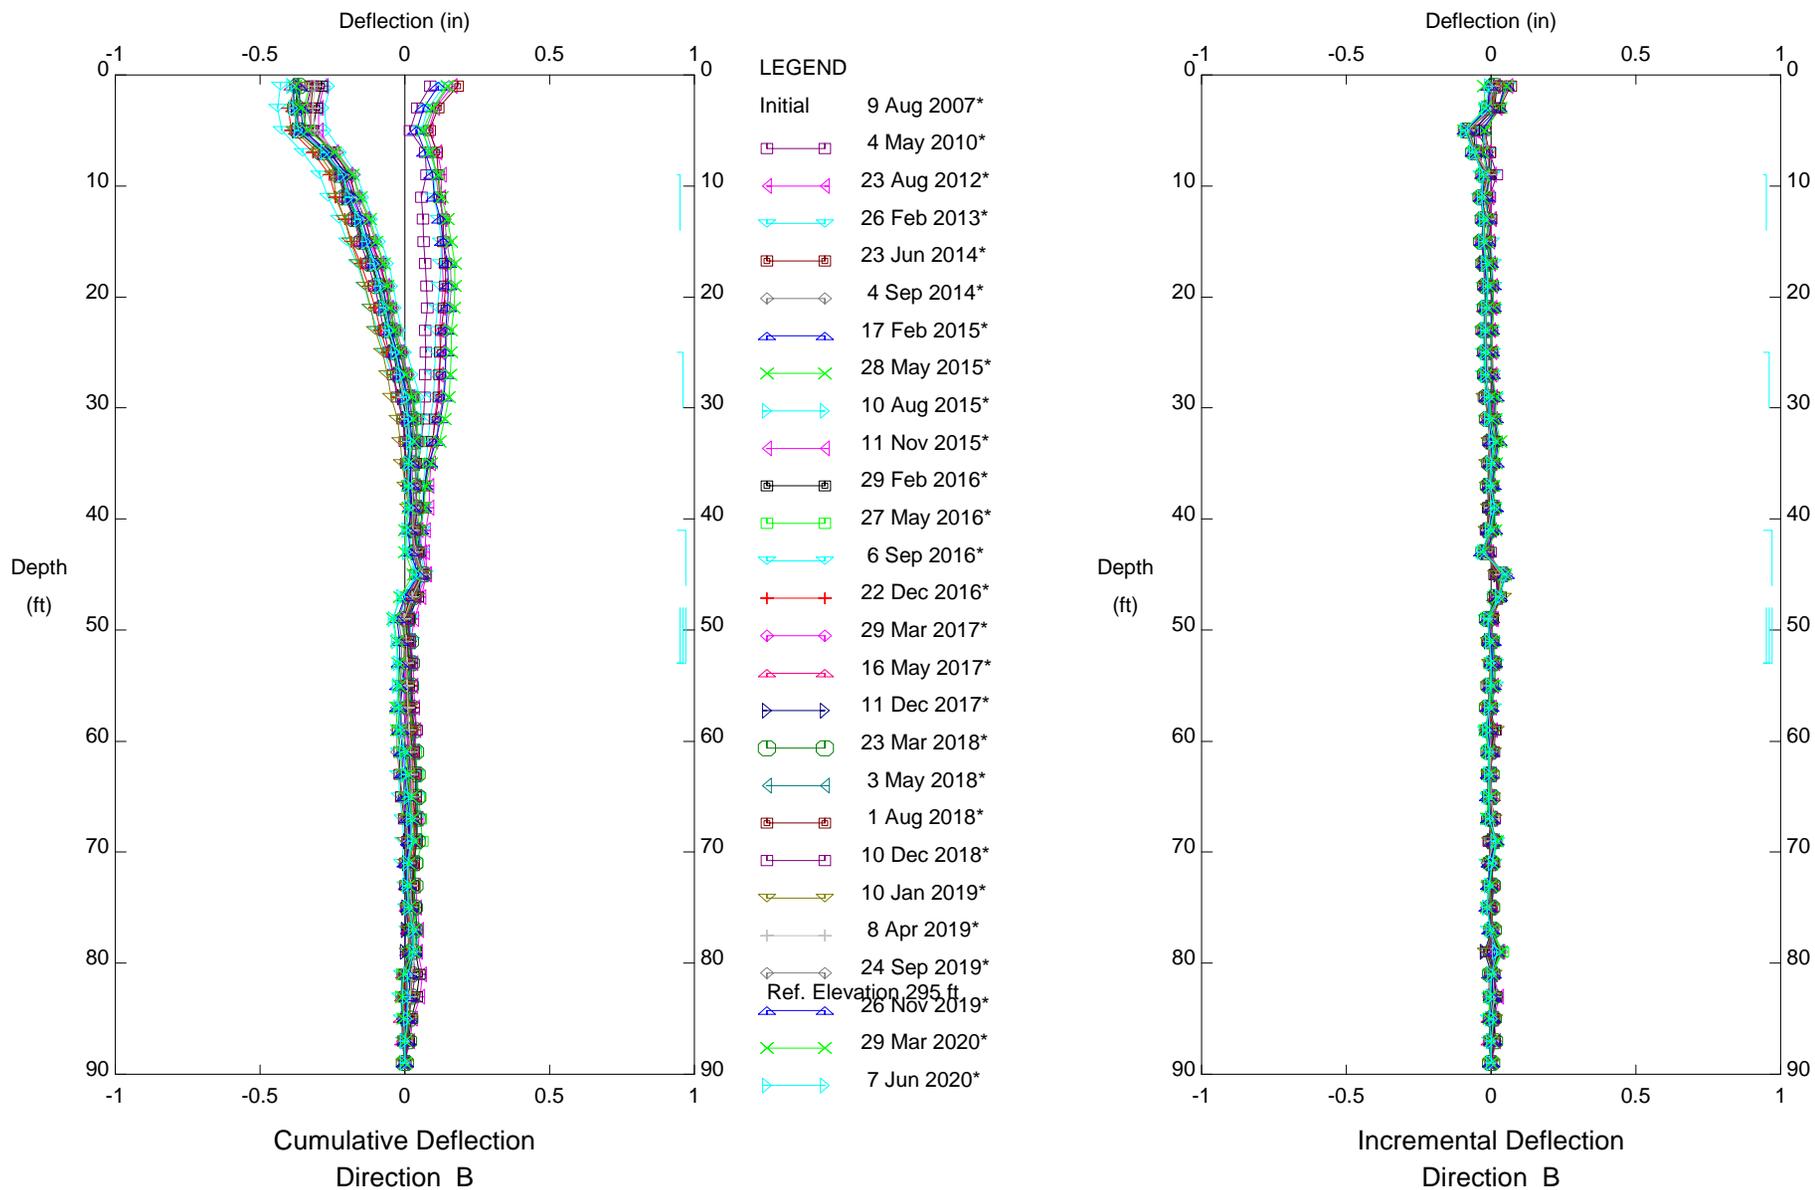

Assessment District 98-2, Inclinometer SI-16
City of Malibu

Sets marked * include zero shift and/or rotation corrections.


Fugro West, Inc. - Ventura, CA

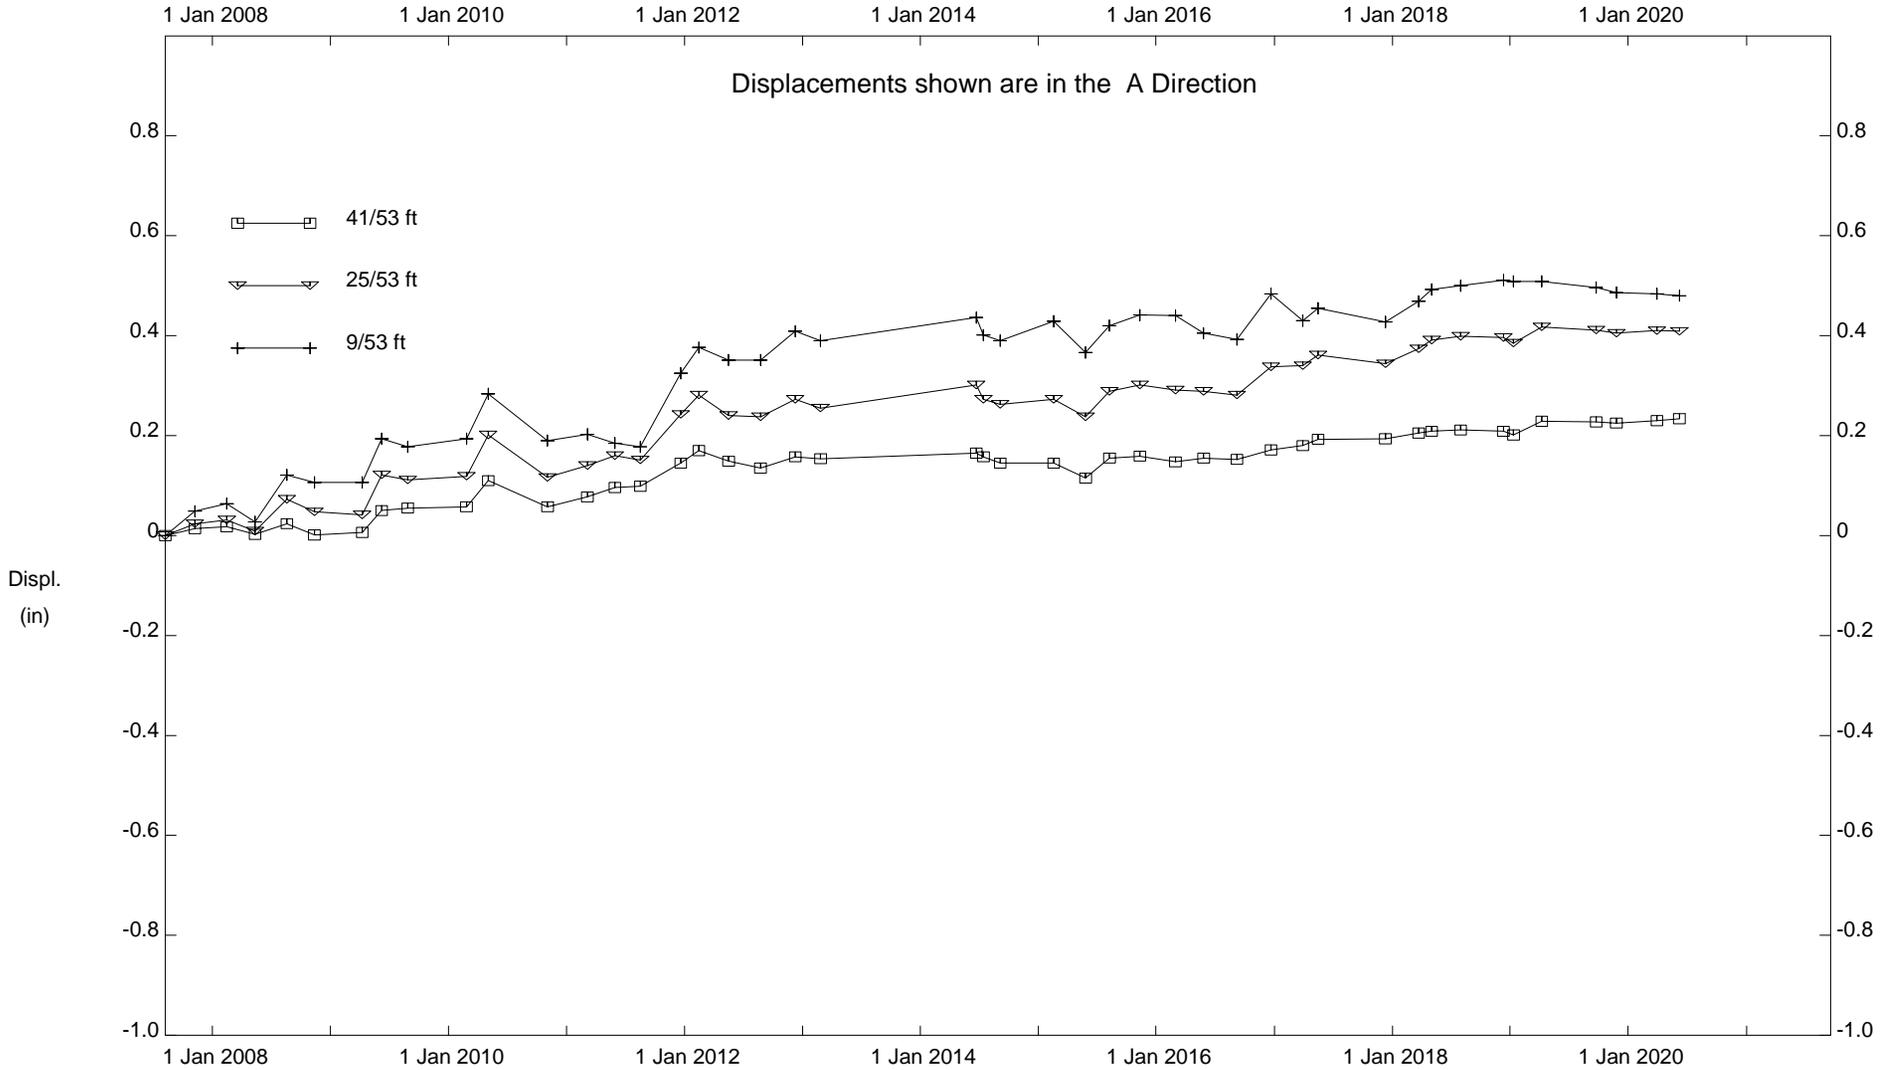

Assessment District 98-2, Inclinator SI-16

City of Malibu

Fugro West, Inc. - Ventura, CA

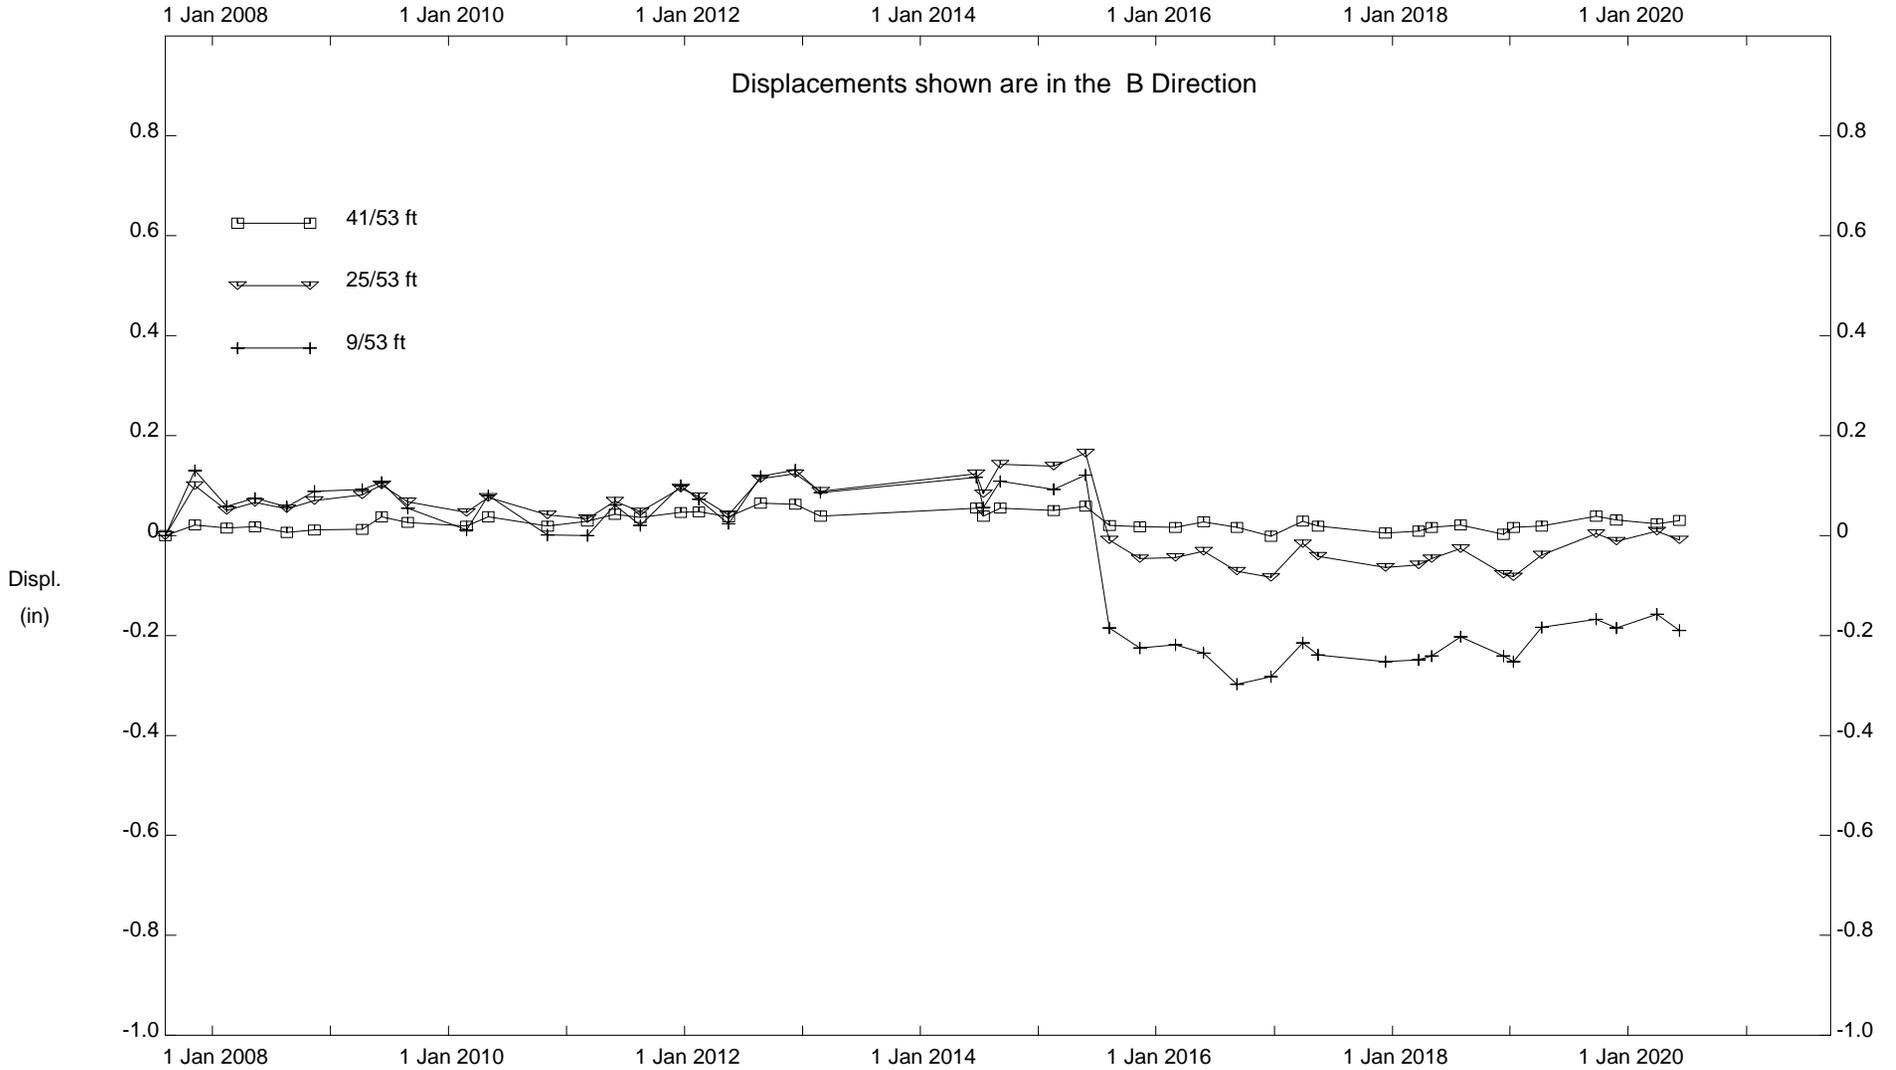

Assessment District 98-2, Inclinometer SI-16

City of Malibu